

LED			IP21
-----	--	--	------

5 years warranty

100'000H
L80/B10
Ta=25°C


220-240V
50-60Hz



BRANCHE IP21

Surface / Suspended

LIGHT OUTPUT	up to 6400 lm
EFFICIENCY	up to 125 lm/W
WIRING	ECG Supplied with white cable (3x0.5mm ² L=600mm)
CCT	3000 - 4000K
CRI	≥ 80 Ra
MATERIALS	
> Housing	RAL9003
> Diffuser	Opal PMMA
LIGHT DISTRIBUTION	Direct
ACCESSORIES	Kit of 2 suspensions 1,50m Transparent feeding cable 1mt 3x0,75mm ² - on request

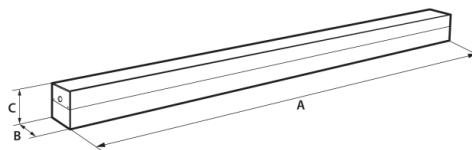

15 W	1 600 lm	595	45	60
20 W	2 120 lm	595	45	60
25 W	2 550 lm	595	45	60
20 W	2 290 lm	1155	45	60
30 W	3 350 lm	1155	45	60
40 W	4 370 lm	1155	45	60
40 W	4 590 lm	1435	45	60
50 W	5 510 lm	1435	45	60
60 W	6 420 lm	1435	45	60