




COLLET

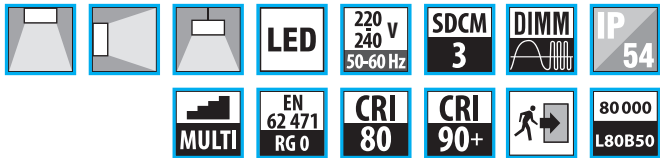

η_{ef} (lm/W)
124-165

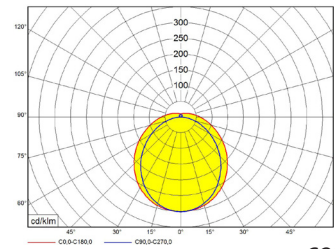

COLLET

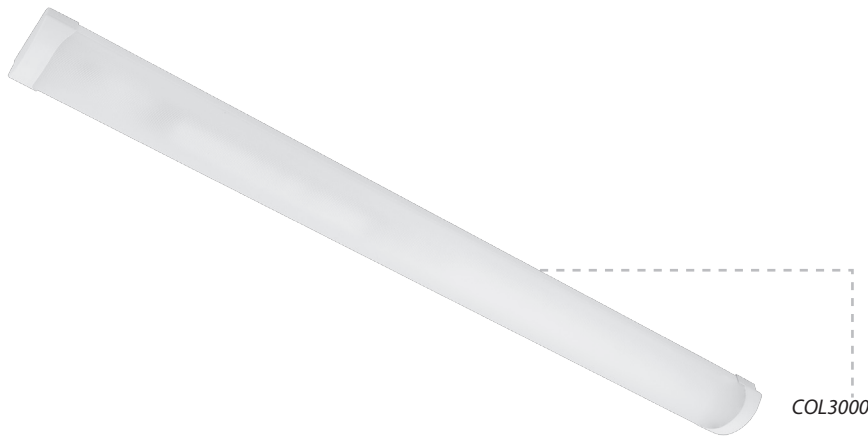

LED fittings with cover

Body:
White painted metal sheet
White plastic endcaps

Optic:
KO - opal PMMA cover
KMO - MAT opal PMMA


Application:
These light fittings can be used as surface mounted or suspended.
- for shops, schools, social, sports and living spaces

Variants:
MULTI - luminaire with switchable power
COL ... PIR - light fitting with PIR sensor
COL ... SM - light fitting with microwave sensor
COL ... NZ - light fitting with emergency module

Accessories:
Protection grid - OM
ZH/UNI4 - universal 4-wires suspension



2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
●	○	○	○	×	○	○	×	×

● default ○ optional × not possible

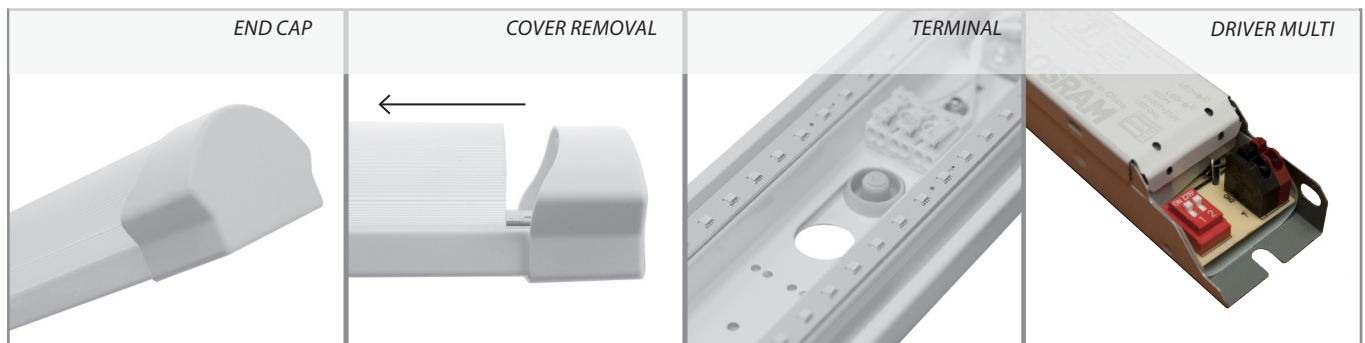

Codes: COL5000M3KO/ND

luminaire type	COL	5000	M	3	KO	/ND
Light output			body length: S = 600 mm M = 1200 mm L = 1500 mm	Color temperature 3 = 3000K, 4 = 4000K, 6 = 6500K	Cover type: KO = opal KM = matopal	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI NDMULTI - luminaire with switchable power

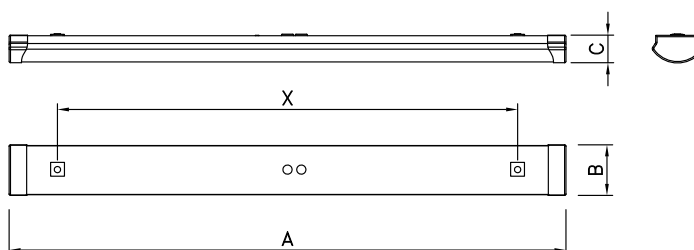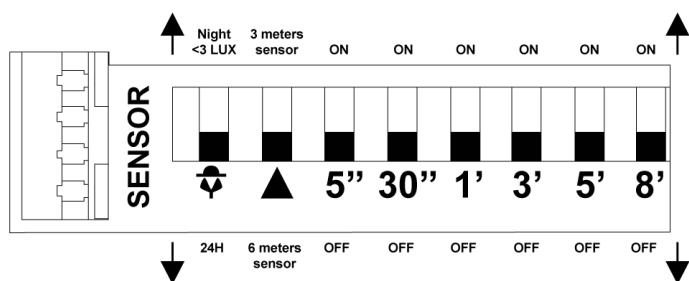

COLLET MULTI	W	lm	A	B	X	C	kg
COL4000 M KO MULTI	17 - 27	2 650 - 4 200	1210	110	1000	60	2,5
COL6000 M KO MULTI	31 - 42	4 600 - 6 000					

KX	W	lm	A	B	X	C	kg
COL2000 SKO	20	2 800	630	110	498	60	1,8
COL4000 SKO	34	4 200					
COL3000 MKO	18	2 600	1210		1000	60	2,5
COL4000 MKO	25	3 800					
COL5000 MKO	36	5 400					
COL3000 LKO	23	3 800	1500		1200	60	3,0
COL6000 LKO	47	7 200					
COL8000 LKO	58	8 700					