



FOCUS



η_{ef} (lm/W)
112



FOCUS

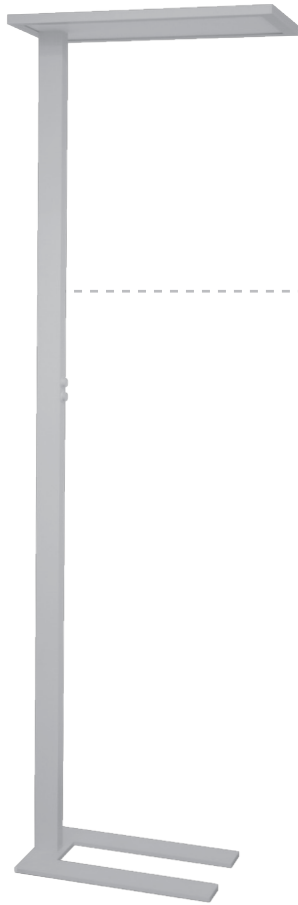

FOCUS

Free-standing LED fitting

Body:

aluminium profile, steel base finished in grey RAL9006, also available in white or black on request

Optic:

Microprismatic / Opal cover
Direct / indirect light distribution

Application:

Free-standing luminaires can be positioned in any location in the room, at any position relative to the task area
Luminaire height 2m

Functions:

Touch dim + Proportional switch - to change a ratio of direct and indirect light
Indirect/direct light can be switched/dimmed separately
FOC.../SC -fitting with integrated light sensor

	W	lm	kg
FOC6000RS4KNDI/TD	52	5 800	10
FOC8000RS4KNDI/TD	80	8 500	10

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	×	○	×	×
×	×	●	○	×	○	×	×	●

● default ○ optional × not possible

