





$\eta_{ef}$  (lm/W)  
108-127



GRE KN



GRE KO

## LED light fitting

**Body:**  
White painted (RAL 9003) zinc metal sheet

**Optic:**  
KN - microprismatic diffusor  
KO - opal cover

**Application:**  
Flat surface lighting fitting.

**Versions:**  
SS - square  
RM - rectangle, medium  
RL - rectangle, large



2200	2700	3000	4000	5700	6500	MIX	RGB	
✗	○	○	●	○	○	✗	✗	✗
●	○	○	✗	✗	✗	○	✗	✗

● default    ○ optional    ✗ not possible



Codes: GRE1RMKN3V1/700ND

Luminaire type	GRE	1	R	M	KN	3	V1	/700ND
Nr of light strips								
Body shape: S - square R - rectangle								
Body length: S = 600 mm M = 1200 mm L = 1500 mm								
Cover type: KN - microprismatic cover KO - opal cover								
Color temperature: 3 = 3000K 4 = 4000K								
Used LEDs								
Driver type: 700mA, 1050mA, 1400mA ND - no dimmable DIM - dimmable 1-10V DALI - dimmable DALI								

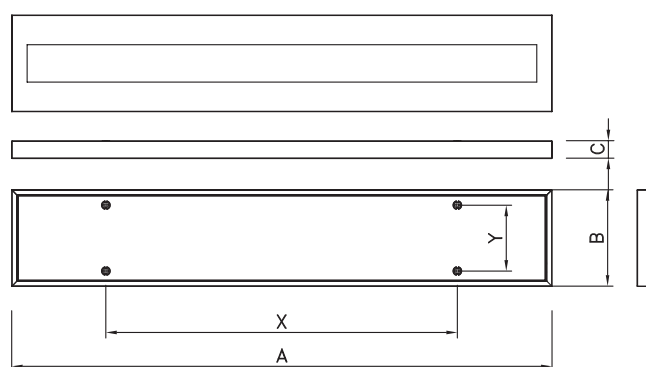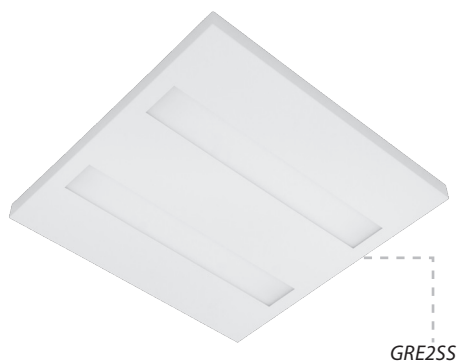

GREG	W	lm		A	B	C	X	Y	kg
		KO	KN						
GRE2SS/700	33	3 900	4 100	650	650	40	400	470	4,5
GRE2SS/1050	50	5 400	5 700						
GRE1RM/700	33	3 900	4 200	1 230	220		800	150	3,7
GRE1RM/1050	52	5 700	6 000						
GRE1RL/1050	39	4 650	4 900	1 535			1 100		
GRE1RL/1400	48	5 700	6 000						