



LUNE



η_{ef} (lm/W)
100-115

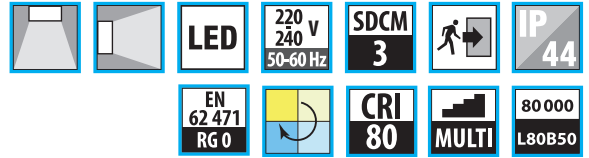

LUNE 480

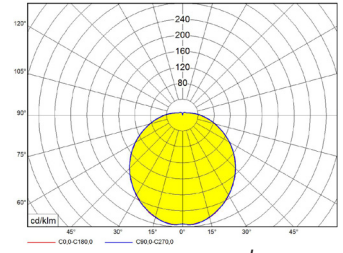

LED fittings with cover

Body:
White painted (RAL 9003) metal sheet

Optic:
KO - opal PMMA cover

Application:
Surface mounted luminaire for residential use, corridors, stairs, hygiene facilities
Suitable for sites with high frequency switching or for systems switched by a presence detector.

Variants:
NDMULTI - luminaire with switchable power

BRSB - IP 44
300 - small fitting Ø 285 mm)
375 - middle fitting Ø 375 mm)
480 - large fitting Ø 480 mm)

Note:
Luminaires can be equipped with microwave sensor (SM) or pasive sensor (PIR)
Luminaires with a diameter of 375 mm and 480 mm can be equipped with an emergency module 1 or 3 hours.

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
●	○	○	○	×	○	○	×	×

● default ○ optional × not possible




Codes: LUN3KO300V1/ NDSM



Luminaire type	LUN 3	KO	300	V1	/ND	SM
Color temperature:	3 = 3000K 4 = 4000K 5 = 5700K	Cover type: KO... PMMA opal	Luminaire diameter:	Used LEDs	Driver type: ND – no dimmable DIM – dimmable 1-10V DALI – dimmable DALI NDMULTI - luminaire with switchable power	Available: SM – microwave sensor INZ - emergency pack PIR - passive sensor

LUNE	V0	V1	V2	V3	V5
Power	9 W	14 W	27 W	32 W	42 W
luminaire light output	900 lm	1 500 lm	3 000 lm	3 800 lm	5 100 lm
efficacy	100 lm/W	107 lm/W	111 lm/W	119 lm/W	121 lm/W
conventional lamps equivalent *	1x13W 1x18W	2x13W 1x26W	2x18W 2x26W	2x32W	2x42W


* approximate comparison, does not replace light calculation

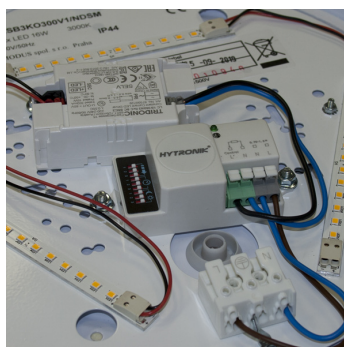



SM - ACTIVE SENZOR

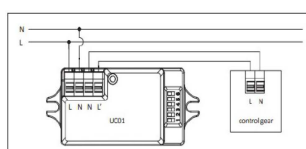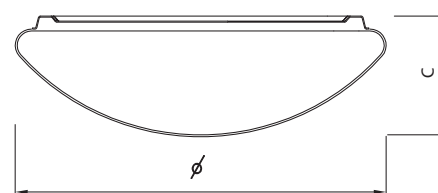

1-detection area 2-hold time



3-daylight sensor

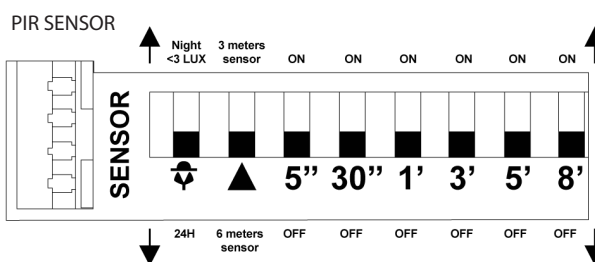

LUNE MULTI	W	lm	Ø	C	kg	IP 44
LUNKO300V6MULTI	5 - 20	500 - 2 000	300	89	1,1	
LUNKO375V2MULTI	15 - 27	1 500 - 2 700	375	105	1,6	
LUNKO480 V3MULTI	30 - 40	3 300 - 4 200	480	132	2,3	

LUNE	W	lm	Ø	C	kg	IP 44
LUN KO300V0	9	900	285	89	1,0	
LUN KO300V1	14	1 500				
LUN KO300V6/2000	20	2 150				
LUN KO375V2/2000	27	3 000	375	108	1,6	
LUN KO375V2						
LUN KO480V3	32	3 800	480	132	2,3	
LUN KO480V5	42	5 100				