

NODUS

Recessed
IP44




Microprisma
UGR



LED		 ECG	IP44	 ECG DALI on request	5 years warranty	50,000 hrs L80/B20 Ta=25°C	220-240V 50-60Hz		CE
-----	--	---------	------	-------------------------------	---------------------	----------------------------------	---------------------	--	----

Recessed / Plasteboard

LIGHT OUTPUT	up to 3300 lm
EFFICIENCY	up to 122 lm/W
WIRING	ECG, on request: DALI
CCT	3000 - 4000 K
CRI	≥ 80 Ra
MATERIALS	
> Housing	Aluminium
> Diffuser	Opal (PMMA Mat Pattern) or Microprisma UGR
LIGHT DISTRIBUTION	Direct
SURFACE FINISH	Housing - white mat color (RAL9003); other colors on request

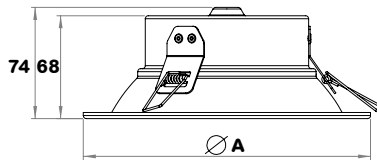

ØA 170mm - mounting hole 145mm
 ØA 190mm - mounting hole 165mm
 ØA 220mm - mounting hole 195mm
 ØA 255mm - mounting hole 230mm
 ØA 330mm - mounting hole 305mm

Netto lm output		CCT	Power	Dimensions (ØA)	Weight	Purchase code
UGR	Opal					
(lm)	(lm)	(K)	(W)	(mm)	(kg)	
1240	1170	3000	12	170	0.40	NOD1701211703K44
1300	1240	4000	12	170	0.40	NOD1701212404K44
1650	1550	3000	16	170	0.40	NOD1701615503K44
1730	1650	4000	16	170	0.40	NOD1701616504K44
1240	1170	3000	12	190	0.50	NOD1901211703K44
1300	1240	4000	12	190	0.50	NOD1901212404K44
1650	1550	3000	16	190	0.50	NOD1901615503K44
1730	1650	4000	16	190	0.50	NOD1901616504K44
2320	2200	3000	20	220	0.70	NOD2202022003K44
2440	2325	4000	20	220	0.70	NOD2202023254K44
2580	2455	3000	24	220	0.70	NOD2202424553K44
2710	2585	4000	24	220	0.70	NOD2202425854K44
2800	2660	3000	25	255	0.90	NOD2552526603K44
2940	2800	4000	25	255	0.90	NOD2552528004K44
3200	3050	3000	29	255	0.90	NOD2552930503K44
3360	3200	4000	29	255	0.90	NOD2552932004K44
2800	2650	3000	28	330	1.05	NOD3302826503K44
2940	2800	4000	28	330	1.05	NOD3302828004K44