



PIRRO






CEILING RECESSED



p. 289 p. 409



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

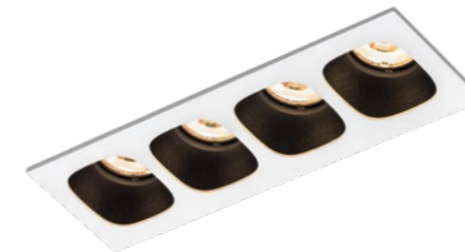

1.0

LED 4.5W | 500mA | 9V
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.09 kg IP20 \varnothing 0.3+D \star 32° $\text{\textcircled{P}}$

50x50 85 4-25

CODE
150151E
150151J
150151K
150151B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380	>90	3
3000K	405	>90	5

ALWAYS USE

power supply | 500mA

CODE
7W dim 90224301
12W DALI 90244402

more power supplies on page 724 and accessories on page 744

2.0

2x LED 4.5W | 500mA | 18V total
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.155 kg IP20 \varnothing 0.3+D \star 32° $\text{\textcircled{P}}$

93x50 60 4-25

CODE
150251E
150251J
150251K
150251B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x380	>90	3
3000K	2x405	>90	5

ALWAYS USE

power supply | 500mA (1 piece needed)

CODE
15W dim 90224503
12W DALI 90244402

more power supplies on page 724 and accessories on page 744

4.0

4x LED 4.5W | 500mA | 36V total
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.28 kg IP20 \varnothing 0.3+D \star 32° $\text{\textcircled{P}}$

181x50 60 4-25

CODE
150451E
150451J
150451K
150451B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5

ALWAYS USE

power supply | 500mA (1 piece needed)

CODE
20W dim 90224602
20W DALI 90244604

more power supplies on page 724 and accessories on page 744

6.0

6x LED 4.5W | 500mA | 2x27V
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.40 kg IP20 \varnothing 0.3+D \star 32° $\text{\textcircled{P}}$

269x50 60 4-25

CODE
150651E
150651J
150651K
150651B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x380	>90	3
3000K	6x405	>90	5

ALWAYS USE

power supply | 500mA (2 pieces needed)

CODE
20W dim 90224602
20W DALI 90244604

more power supplies on page 724 and accessories on page 744