





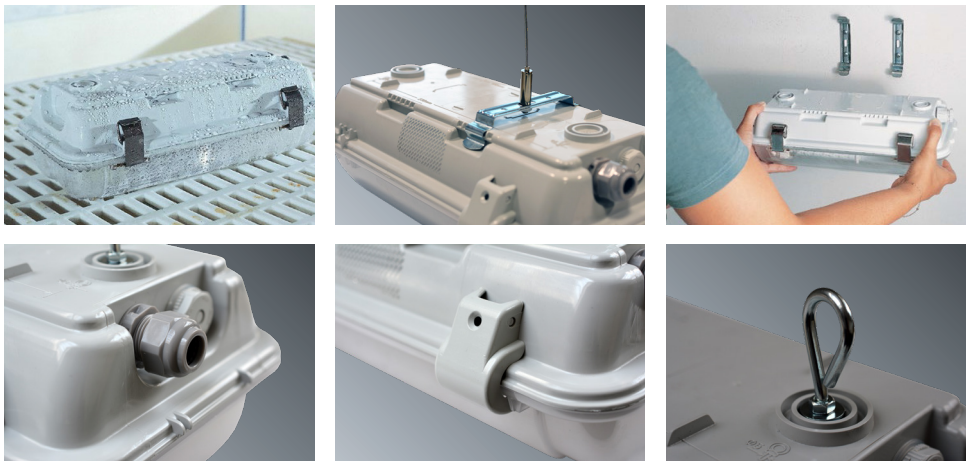


Accessories on request

	Suspended mounting 051106 Plastic suspension bracket with accessories		Suspended mounting 051131 Cable suspension VIPET (2pcs)
	003571 Stainless steel clip - POINTER, VIPET		Direct mounting 001718 Stainless steel fastening bracket - POINTER 2x
	001744 LAK Protective cage POINTER 2x11W		061066 POINTER wall bracket

Lighting fixture detail



On request

MULTI-1/3 - maintained emergency lighting is always on (standard luminaire with emergency lighting module)

2.7K-6.5K - colour temperature

RN - outdoor application for uncovered areas zones

NSPP - stainless steel clip and fastening bracket

NSP - stainless steel clip

NUP - stainless steel fastening bracket

ADELS - possibility to equip lighting fixtures with a connector terminal block

EM-1/3 - non-maintained emergency lighting (usually only comes on for a specific duration when the power supply to normal artificial lighting fails)

DIM – dimmable electronic ballast (DALI,DSI, 1-10V)

GESIS – possibility to equip lighting fixtures with connectors

II - insulation class

Standard order number	MULTI-1H	MULTI-3H	DALI	1F	3F	RN	NSP	MULTI-1H-NSP	MULTI-3H-NSP	DALI-NSP
052981	051980	051983	052981 DALI	X	X	051973	052981 NSP	051980 NSP	051983 NSP	052981 DALI NSP
052983	051981	051979	052983 DALI	X	X	051974	052983 NSP	051981 NSP	051979 NSP	052983 DALI NSP
052985	051982	051978	052985 DALI	X	X	051975	052985 NSP	051982 NSP	051978 NSP	052985 DALI NSP
052987	X	X	052987 DALI	X	X	051976	052987 NSP	X	X	052987 DALI NSP
052988	X	X	052988 DALI	X	X	051977	052988 NSP	X	X	052988 DALI NSP
052989	X	X	052989 DALI	X	X	051985	052989 NSP	X	X	052989 DALI NSP