


RHONE




			η_{ef} (lm/W) 130-142	




RHO200



RHO N



RHO W



RHO AS

LED floodlights

Body:
Powder painted non-corrosive high-pressure die-cast aluminium

Optic:
Symetric glare-free optic lens

N - narrow beam 30°

W - wide beam 90°

AS - asymmetric optics

Application:

Floodlight for both indoor and outdoor application


2200	2700	3000	4000	5000	6500	MIX	RGB	
×	×	○	●	○	○	×	×	●
●	×	○	×	×	×	×	×	●

● default ○ optional × not possible



Codes: RHO100W4/ND

Luminaire type	RHO	100	W	4	/ND
		Light output (x100 lm)	Optic W - Clear optic 90° wide beam N - Clear optic 30° narrow beam	Color temperature 3 = 3000K 4 = 4000K 5 = 5000K	Driver type: ND - Non dimmable DALI - dimmable DALI

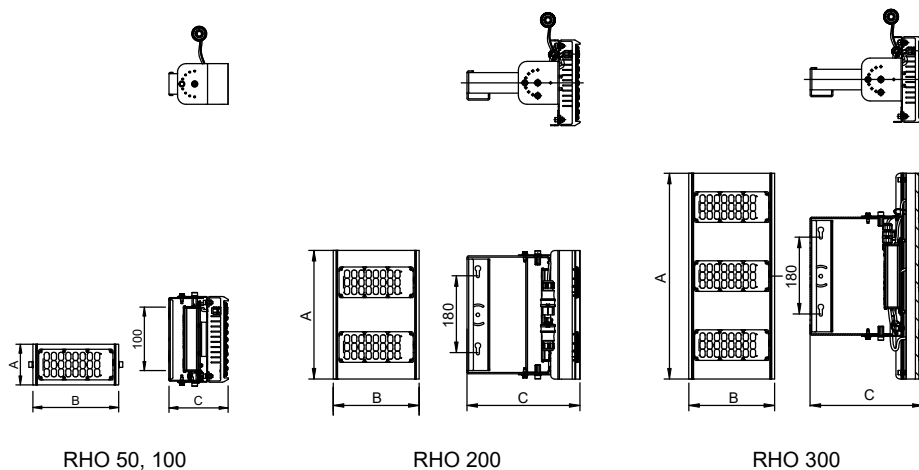

RHO	W	lm			A	B	C	kg
		W	N	AS				
RHO 100	75	10 100	9 800	10 000	95	200	138	2
RHO 200	155	21 500	20 800	21 500	300		260	4,1
RHO 300	224	31 800	30 800	31 500	480			7