


LAMP CONCEPT
LIGHTING

WEVER & DUCRÉ
LIGHTING

“There’s no beauty without great lighting. Beauty is never loud. It hides in details, in shape, in moments, in light. Great lighting allows us to see what was always there and to transform it into something beautiful.”

ANTWERP-BASED PHOTOGRAPHER FREDERIK VERCRUYSSE

# story telling

weverducre.com/coverstory26

LAMP-CONCEPT.CH

**CEILING RECESSED** 54 – 173

QITO trimless 57 | QITO 59 | MATCH POINT trimless 61 | MATCH POINT 61 | BLIEK PETIT trimless 63 | BLIEK PETIT 63 | BLIEK 67 | LINOO trimless 71

LINOO 71 | PIRRO PETIT 75 | PIRRO 77 | PLANO PETIT 83 | PLANO 85 | STRANGE PETIT trimless 87 | STRANGE trimless 89 | SNEAK trimless 91 | SNEAK 93

DEEP POINT 97 | DEEP BIJOU 99 | DEEP PETIT IQ 101 | DEEP PETIT 103 | DEEP IQ 105 | DEEP 107 | DEEPER 109 | DEEP ADJUST PETIT IQ 111 | DEEP ADJUST PETIT trimless 113

DEEP ADJUST PETIT 113 | DEEP ADJUST IQ 115 | DEEP ADJUST trimless 117 | DEEP ADJUST 119 | RONY POINT 123 | RONY PETIT 125 | RONY ADJUST PETIT 127 | RONY ADJUST 129 | CENO 131

LECA 135 | MATCH 137 | MATCH SNEAK trimless 143 | MATCH SNEAK 143 | MATCH STICK trimless 145 | MATCH STICK 145 | RUVI 147 | PLANO IP44 151 | MATCH POINT IP44 153

DEEP POINT IP44 155 | DEEP BIJOU IP65 157 | DEEP PETIT IP65 159 | DEEP IP44 | IP65 161 | DEEPER IP44 163 | TAIO IP65 165 | RINI SNEAK IP44 167 | PERLEZ IP44 169 | MIRBI 1.0 IP44 171

MIRBI 2.0 IP44 171 | CITY IP44 173

**CEILING SURFACE** 174 – 307

QITO 177 | BLIEK PETIT 179 | CENO 181 | LECA 189 | MATCH 193 | MICK 199


Indoor


PILLO 201 | SARA 203 | SQUBE 205 | LINOO 211 | PIRRO PETIT 213 | PIRRO 215 | PIRRO OPAL 221 | PIRRO ON BASE 223 | PLANO PETIT 227

SIRRO 229 | BOX MINI 231 | BOX 235 | DOCUS MINI 239 | DOCUS 241 | HEXO MINI 243 | HEXO 245 | RAY MINI 247 | RAY 251

SOLID BIJOU 253 | SOLID PETIT 255 | SOLID 257 | TRACE 261 | FINLIN 263 | FIL SPIN 267 | TRACE SPIN 269 | PERLEZ SPIN 271 | TRACE GRID 273

PERLEZ GRID 275 | VENN 277 | DRO 279 | MIRRO 283 | CLEA 287 | J.J.W. 289 | WIRO 291 | ROOMOR 293 | PERLEZ IP44 295

MIRBI 1.0 IP44 297 | MIRBI 2.0 IP44 297 | TAIO IP65 299 | ROB IP44 301 | ROBY IP44 303 | TOWNA IP44 305 | ROSS IP54 307

**STREX 48V-TRACK** 312 – 359

TRACKS 313

CENO 321 | LECA 325 | DOMY 327 | MATCH 329 | TRACE MINI 331 | MICK 333 | BOX 335 | DOCUS 337 | HEXO 339

RAY 341 | DOT MODULE 343 | OPAL MODULE 343 | COZY CONE 345 | MATCH 347 | TRACE 351 | ODREY 353 | OPLIA 357 | SOLLI 359

Indoor

**1-PHASE TRACK**
360 – 383



TRACKS 361



PILLO 363



SARA 365



SQUBE 369



PIRRO 371



DRO 373



HEXO MINI 375



HEXO 377



RAY MINI 375



RAY 377



ODREY 379



RUVI 383

**3-PHASE TRACK**
384 – 395



TRACKS 385



LIKO 387



SQUBE 389



HEXO MINI 391



HEXO 393



RAY MINI 391



RAY 393



ROOMOR 395

**SYSTEM**
396 – 411



QUBBY 397



FLYRA 401



ELLO 405



ILANE 409

**CEILING SUSPENDED**
412 – 565



MATCH LUSTA 415



TRACE 417



NET 421



FINELLE 423



FLYRA 427



FINLIN 433



STUDO 437



FIL 441



DARF 445



SHEDDA 449



KUJO 453



OPLIA 457



QUBBY 459



GIGANT 461



CONE 463



DRO 465



MIRRO 467



J.J.W. 479



WIRO 489



ROOMOR 495



ROOMOR 499



COZY CONE 503



HEXO MINI 505 | 531



HEXO 533



RAY MINI 507 | 535



RAY 537



MATCH 509



TRACE 511 | 547



ODREY 517 | 539



OPLIA 521



SOLLI 523



WETRO 549



CLEA 557



SHIEK 561



DINOR 563

**WALL RECESSED**
566 – 581



LECA SNOOZE 569



MATCH SNOOZE 571



RETO 573



LITO 1.0 575



LITO 2.0 575



STRIPE SLIM 577



STRIPE 579



ORIS 581

**WALL SURFACE**
582 – 711



CENO 585



MATCH 589



TRACE MINI 591



TRACE 593



TRACE SLIM 595



ODREY 599



BOX MINI 605



BOX 607



DOCUS MINI 609



HEXO MINI 611



RAY MINI 613



RAY 615



CENTRAL 617



LEENS 619



BENTO 621



DRO 623



MIRRO 625



CLEA 631



J.J.W. 633



ROOMOR 639



DARF 643



CG SQUARE 647



DOT 649



TAPIS 651



MILES ROUND 663



MILES CARRÉ 667



MILES 669



LARRA 671



FINLIN 673



FINLIN ROUND 679



FIL SPIN 681



VENN 683



MATCH SNOOZE 685



MICK SNOOZE 687



SARA SNOOZE 689



MICK WALL 691



DOMINO 693



SCAVA 695



HAJO IP44 697



PERLEZ IP44 701



MIRBA IP44 705



MIRBI IP44 707



RIBELLE IP65 709



PAVIO IP65 711

# Indoor

## TABLE
712 – 725


DRO
715


DRO
717


CG01
719


MIRRO
721


MATCH
723


ROOMOR
725

## FLOOR
726 – 735


DRO
715


FINLIN
727


MATCH
729


DRO
731


MIRRO
733


ROOMOR
735

## SOFT ACOUSTICS


MIRRO SOFT
285


MIRRO SOFT
471


SPIRRA SOFT
475


WAVE SOFT
477


SOLLI COCOON
525


MIRRO SOFT
629


TAPIS SOFT
657

# Outdoor

## CEILING RECESSED
738 – 749


DEEP BIJOU
741


DEEP PETIT
743


DEEP
745


TAIO
747


INTRA
749

## CEILING SURFACE
750 – 775


TRAM
753


TUBE
755


TAIO
757


RAY
759


TRAIN
761


TUBE CARRÉ
763


BOX
765


BLAS
767


ROB
769


ROSS
771


TRADORA
775

## CEILING SUSPENDED
776 – 777


TRADORA
777

## WALL RECESSED
778 – 787


RETO
781


ORIS
785

## WALL SURFACE
788 – 835


CLASCO
791


KIOSK
793


TRAM
797


TUBE
799


TAIO
803


RAY
805


TRAIN
807


CENTRAL
809


TUBE CARRÉ
811


BOX
815


TAPE
817


PALOS
819


SWAM
821


TRADORA
823


RIBELLE
825


BLAS
827


X-BEAM
829


X-BEAM ROUND
829


PAVIO
831


RETO ROUND
833


RETO
835

## FLOOR RECESSED
836 – 853


BLINK trimless
839


BLINK
839


CARD
843


MAP
845


MAP ASYM
849


CHART
851


CHART ASYM
853

## FLOOR SURFACE
854 – 891


KIOSK
857


SWAM
859


STIPO
863


X-BEAM
865


RIBELLE
867


GATE ROUND
869


GATE CARRÉ
871


PALOS ROUND
873


PALOS CARRÉ
877


LINUS
881


GEO
885


REED
887


POLA
889

WELCOME TO OUR WORLD

Wir alle kennen ihn: den Blick an die Decke und den Gedanken „Diese Leuchte hat wirklich jeder“. Deshalb schaffen wir Lichtlösungen, die einzigartig sind – inspiriert von Menschen wie Ihnen, die Design und Qualität lieben. Denn für langweilige Leuchten ist das Leben zu kurz.

Nous le connaissons tous : ce regard vers le plafond en pensant « Tout le monde a cette lampe » . C’est pourquoi nous créons des solutions d’éclairage uniques – inspirées par des personnes comme vous, qui apprécient le design et la qualité. La vie est trop courte pour des lampes ennuyeuses.

weverducre.com/about

# our world



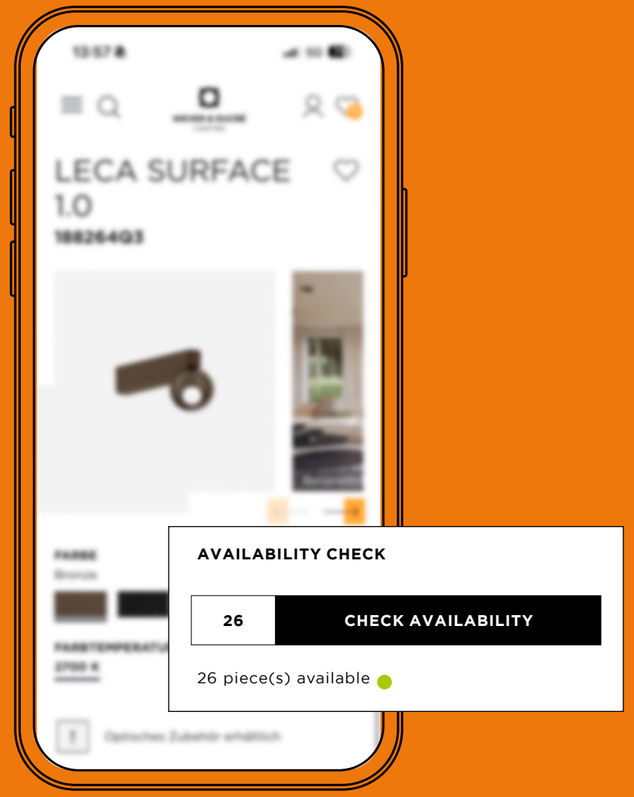


# availability

READY FOR AN ONLINE DATE

So ist das mit unseren Leuchten: Einmal verliebt, will man sie sofort haben. Gute Nachricht: Wir versenden alle Produkte innerhalb von 48 Stunden! Prüfen Sie online die Verfügbarkeit Ihres Favoriten.

C’est comme ça avec nos luminaires : une fois que vous en êtes tombé amoureux, vous les voulez tout de suite. Bonne nouvelle : nous expédions tous les produits sous 48 heures ! Vérifiez la disponibilité de votre article préféré en ligne.

weverducre.com/products

# with

## FROM BELGIUM WITH LOVE

In Belgien liegt nicht nur der Duft von frischen Waffeln und Schokolade in der Luft – auch die Liebe zu gutem Design. Hier treffen kreative Köpfe auf eine lange Designtradition, verbinden Handwerkskunst mit moderner Ästhetik – und schaffen Licht, das Geschichten erzählt und Räume strahlen lässt.

En Belgique, ce n’est pas seulement le parfum des gaufres et du chocolat frais qui flotte dans l’air – c’est aussi l’amour du bon design. Ici, des esprits créatifs rencontrent une longue tradition du design, mêlant artisanat et esthétique moderne – pour une lumière qui fait rayonner les espaces.

weverducre.com/about



13&9 DESIGN



CHRISTOPHE GEVERS



# design



JULES WABBES

# that

OUR SIGNATURE PIECES

Seit über 40 Jahren gestaltet Wever & Ducré Licht als Ausdruck von Design. Verwurzelt im belgischen Erbe arbeitet die Marke mit Produkten von Christophe Gevers, Serge Cornelissen und Jules Wabbes sowie internationalen Designern wie 13&9 Design – für zeitlose Eleganz und inspirierende Lichtkunst.

Depuis plus de 40 ans, Wever & Ducré façonne la lumière comme une expression du design. Ancrée dans l'héritage belge, la marque collabore sur des produits de Christophe Gevers, Serge Cornelissen et Jules Wabbes, ainsi qu'avec des designers internationaux tels que 13&9 Design – pour créer une élégance intemporelle et un art lumineux inspirant.



S + R CORNELISSEN

# lasts

weverducre.com/iconicproducts

CHRISTOPHE GEVERS

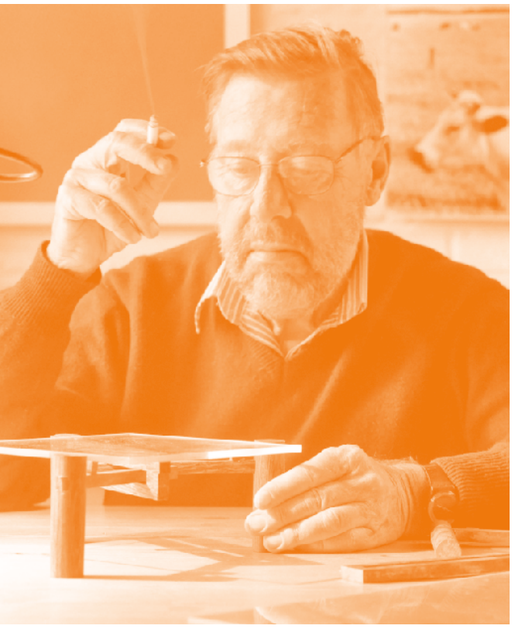

Christophe Gevers (1928–2007) war ein bedeutender belgischer Innenarchitekt und Designer, bekannt für seine charakteristischen Restaurantkonzepte. Seine Verbindung von Handwerkskunst und Ästhetik prägt sein Werk, das sein Schaffen einzigartig und vielseitig zugleich machte.

Christophe Gevers (1928–2007) était un important architecte d'intérieur et designer belge, connu pour ses concepts de restaurants distinctifs. Son alliance de savoir-faire et d'esthétique a marqué son œuvre, rendant ses créations à la fois uniques et polyvalentes.

# gevers

weverducre.com/gevers



13&9 DESIGN

# 13&9 design

13&9 Design – das kreative Duo Anastasija und Martin Lesjak – steht seit 2013 für visionäres Design aus Österreich. Für Wever & Ducré entstanden Highlights wie MIRRO, DRO und SHEDDA fractal. Ihr Stil: fraktale Muster, modulare Akustik – Licht Systeme und skulpturale Formen, die das Wohlbefinden der Menschen und die atmosphärischen Räume im Mittelpunkt haben.

13&9 Design – le duo créatif formé par Anastasija et Martin Lesjak – incarne depuis 2013 un design visionnaire venu d'Autriche. Pour Wever & Ducré, ils ont créé des pièces phares comme MIRRO, DRO et SHEDDA fractal. Leur style : des motifs fractals, une acoustique modulaire – des systèmes d'éclairage et des formes sculpturales qui placent le bien-être des personnes et les espaces atmosphériques au centre.



weverducre.com/13and9design

# jules



J.J.W.

Jules J. Wabbes ist seit Jahren ein Klassiker von Wever & Ducré. Die grazil gebogenen Linien zeugen von anspruchsvoller Ästhetik. Wir halten das für Tradition im besten Sinne und setzen die Produktlinie mit Decken- und Wandleuchten fort.

Jules J. Wabbes est depuis de nombreuses années un classique de Wever & Ducré. Les lignes gracieusement courbées témoignent d'une esthétique raffinée. Nous considérons cela comme une tradition dans le meilleur sens du terme et poursuivons la gamme de produits avec des plafonniers et des appliques murales.

# *wabbes*

weverducre.com/jjw



# serge & robert

S+R CORNELISSEN

Serge Cornelissen verfügte über mehr als 20 Jahre Erfahrung im Design von Lichtlösungen für Architektur. Mit seinem architektonischen Hintergrund vereinte er Ästhetik, Technologie und Funktion zu preisgekrönten Konzepten – etwa für Wever & Ducré mit MICK, VENN, HAJO und QUBBY.

Serge Cornelissen possédait plus de 20 ans d'expérience dans la conception de solutions d'éclairage pour l'architecture. Grâce à sa formation en architecture, il associait esthétique, technologie et fonctionnalité dans des concepts primés – notamment pour Wever & Ducré avec MICK, VENN, HAJO et QUBBY.



weverducre.com/cornelissen

ALL AROUND THE WORLD

Wever & Ducré-Leuchten sind weltweit zuhause – von der London-Rooftop-Bar bis zum Berlin-City-Apartment. Ihr Erfolgsgeheimnis: außergewöhnliches Design und hochwertige Materialien. Und das Beste: Wir liefern alle Produkte plastikfrei. Wo kann man uns finden? Fast überall. Einfach online entdecken und direkt einen Termin im nächsten Showroom vereinbaren.

Les luminaires Wever & Ducré se sentent chez eux partout dans le monde – des rooftop bars de Londres aux appartements citadins de Berlin. Leur secret ? Un design exceptionnel et des matériaux de première qualité. En het beste van al is: nous livrons tous nos produits sans plastique. Où nous trouver ? Presque partout. Découvrez nos emplacements en ligne et réservez facilement votre prochaine visite en showroom.



KORTRIJK



PARIS

world



FRANKFURT

weverducre.com/locations

# lifetime



SUSTAINABILITY BY FUNCTION

Unser Ziel: Leuchten, die auch nach Jahren noch strahlen. Dank Qualität nach Ökodesign-Richtlinie, langlebigen Ersatzteilen und LED-Engines mit 20-Jahre-Austauschbarkeit. LED-Modul tauschen? Mit werkzeugfreien Wechselmodulen ganz einfach. Plus: 5 Jahre Garantie* – fair, oder?

Notre objectif : des luminaires qui brillent même après des années. Grâce à la qualité conforme à la directive sur l'écoconception à des pièces de rechange durables et à des LED engines offrant 20 ans de remplaçabilité. Changer le module LED ? Rien de plus simple grâce aux unités sans outil. Et en plus, 5 ans de garantie* – équitable, non ?

*Die geltenden Garantiebedingungen sind auf weverducre.com einsehbar.
*Les conditions de garantie indiquées sur le site weverducre.com s'appliquent.

weverducre.com/sustainability

HOW SOFT CAN IT GET?

Unsere Welt ist laut – umso wichtiger sind Orte, die Ruhe ausstrahlen. Die Wever & Ducré-Soft-Kollektion bietet stimmungsvolles Licht kombiniert mit Design & Atmosphäre. Das Material? Filz aus recycelten PET-Flaschen. Klingt gut, oder?

Notre monde est bruyant – d'où l'importance de lieux qui dégagent du calme. La collection Soft de Wever & Ducré offre une lumière chaleureuse, alliée à un design plein d'atmosphère. Le matériau ? Du feutre fabriqué à partir de bouteilles PET recyclées. Ça sonne bien, non ?

weverducre.com/soft-acoustics



# *soft* acoustics



3D PRINTED
by IQ LUX

layer by layer



PRINTED IN 3D

Seit 2023 experimentieren wir gemeinsam mit IQ LUX an nachhaltigen Materialien, um Leuchten mit minimaler Umweltbelastung zu entwickeln. Jetzt wird diese Vision Teil unseres Produktportfolios – mit der neuen IQ-Serie der DEEP Family. Ressourcenschonend produzierte Leuchten ausgestatted mit hocheffizienten LED-Modulen.

Depuis 2023, nous expérimentons avec IQ LUX des matériaux durables afin de développer des luminaires à impact environnemental minimal. Cette vision fait désormais partie du notre portefeuille de produits avec la nouvelle série IQ de la famille DEEP. Un boîtier fabriqué de manière économe en ressources, équipé de modules LED à très haut rendement.

weverducre.com/iqlux

THE FUTURE SHINES BRIGHT

Unsere Leuchten bleiben im Kopf – nicht nur wegen ihres Designs, sondern auch dank smarter Technik. Neu dabei: unsere Auswahl an Leuchten mit integrierter Loxone-Tree-Technologie, die sich ganz einfach mit der Gebäudeautomatisierung von Loxone verbinden. So lassen sich kleine wie große Projekte ganz einfach umsetzen.

Nos luminaires marquent les esprits – non seulement par leur design, mais aussi grâce à une technologie intelligente. Nouveauté : une sélection de luminaires avec technologie Loxone Tree intégrée, facilement connectables à l'automatisation du bâtiment Loxone. Les petits comme les grands projets se réalisent ainsi en toute simplicité.

ALL LOXONE LUMINAIRES ONLINE
weverducre.com/loxone

loxone

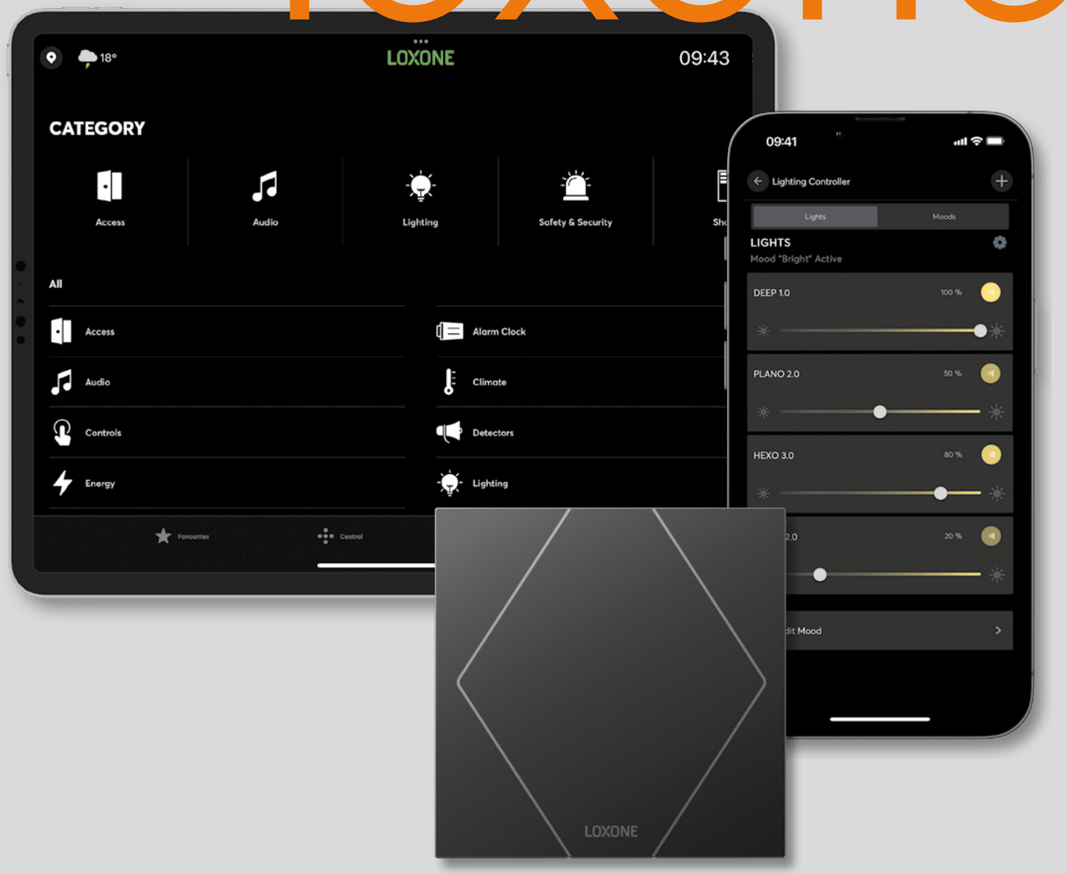


works with Loxone

READY TO TUNE UP YOUR PROJECT?

Spannende Beleuchtungssysteme nicht erschwinglich? Nonsense! Mit Wever & Ducré wissen Sie es besser und zeigen allen, wie einfach es ist, mit dem richtigen Licht die perfekte Atmosphäre in Ihrem Herzensprojekt.

Des systèmes d'éclairage remarquables seraient-ils inabordables ? Absurde ! Avec Wever & Ducré, vous savez que c'est tout le contraire. Il devient simple de créer l'atmosphère parfaite grâce à la bonne lumière, pour un projet qui vous tient réellement à cœur.




LEEUWARDEN | THE NETHERLANDS



HASSELT | BELGIUM

tune up



COLOGNE | GERMANY

weverducre.com/tune-up





HERO OF THE YEAR 2025

# projects



weverducre.com/picture-gallery

# to fall in *love*

# light guide



THE KEY TO A BRIGHTER HOME

Wie wir Licht wahrnehmen, beeinflusst, wie wir uns in einem Raum fühlen. Deshalb sollte die Beleuchtung immer zur Funktion passen – ob zum Arbeiten, Spielen oder Entspannen. Sie wissen schon, wofür? Perfekt! Dann starten Sie mit der Planung – oder entdecken Sie Basics in unserem Lightguide.

La façon dont nous percevons la lumière influence notre bien-être dans un espace. C’est pourquoi l’éclairage doit toujours s’adapter à sa fonction – que ce soit pour le travail, le jeu ou la détente. Vous savez déjà ce que vous voulez ? Parfait ! Lancez la planification ou découvrez les bases dans notre Lightguide.

weverducre.com/basic-lightguide

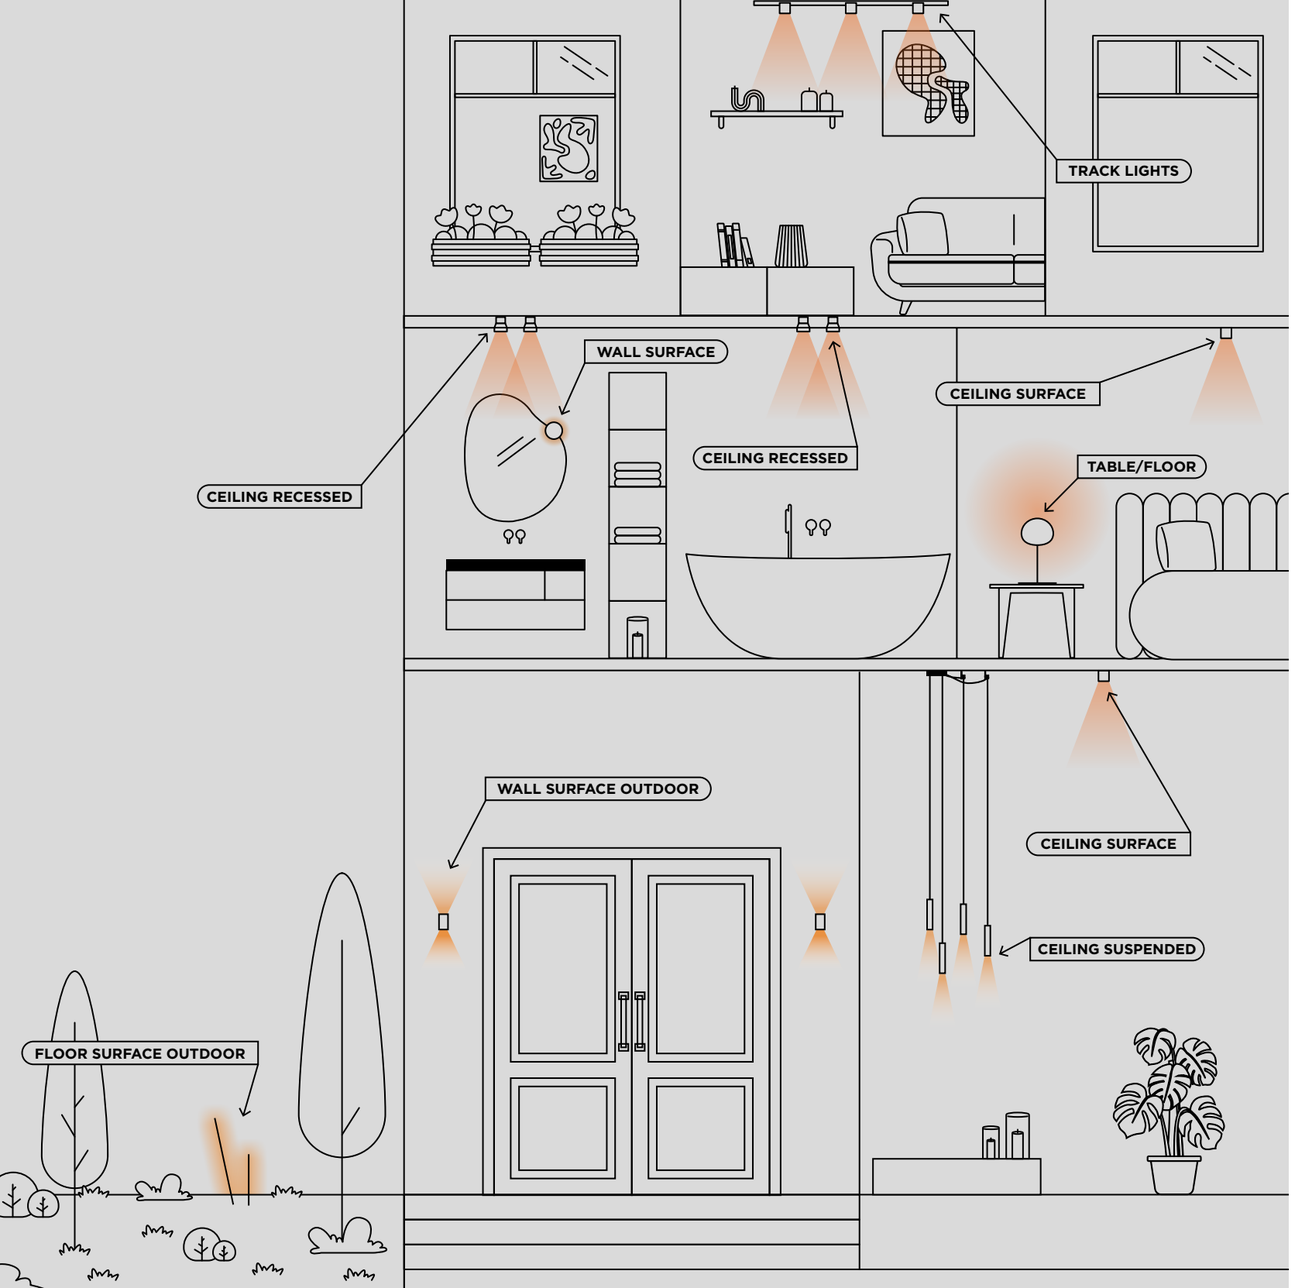


THREE OF US IS A PRODUCT FAMILY

Sie lieben ein Design so sehr, dass Sie es überall um sich haben möchten? Dann achten Sie auf die Mounting Icons! Wenn Sie dort mindestens drei entdecken, gehört die Leuchte zu einer Familie – perfekt, um Räume im einheitlichen Stil zu gestalten. Auch draußen – mit unseren Outdoor-Varianten.

Vous aimez tellement un design que vous le voudriez partout ? Alors, regardez les Mounting Icons ! S'il y en a au moins trois, le luminaire fait partie d'une famille – parfait pour créer une harmonie dans vos espaces. Et bonne nouvelle : nos versions outdoor le permettent aussi.


CEILING RECESSED


CEILING SURFACE


TRACKS


CEILING SUSPENDED


WALL RECESSED


WALL SURFACE


TABLE | FLOOR


CEILING RECESSED


CEILING SURFACE


CEILING SUSPENDED


WALL RECESSED


WALL SURFACE


FLOOR RECESSED


FLOOR SURFACE

# *Highlight* families

**CENO**



SEMI-RECESSED 131 | SURFACE 181 | ON STREX 321 | WALL 585

**MATCH**



RECESSED 61 | SEMI-RECESSED 137 | SURFACE 193 | ON STREX 329 | ON STREX | SUSPENDED 347 | 509 | LUSTA 415 | SNOOZE WALL RECESSED 571 | WALL 589



SNOOZE WALL SURFACE 685 | TABLE 723 | FLOOR 729

**TRACE**



SURFACE 261 | SPIN 269 | GRID 273 | MINI ON STREX 331 | ON STREX | SUSPENDED 351 | 511 | CHANDELIER 417 | WALL 591 | SLIM WALL 595

**FINLIN**



SURFACE 263 | SUSPENDED 433 | WALL 673 | WALL ROUND 679 | FLOOR 727

**ODREY**



ON STREX 353 | ON 1-PHASE TRACK 379 | SUSPENDED 517 | WALL 599

**LECA**



RECESSED 135 | SURFACE 189 | ON STREX 325 | SNOOZE 569

**PERLEZ**



SEMI-RECESSED 169 | SPIN 271 | GRID 275 | SURFACE 295 | WALL 701 | MIRROR CLIP 703

**ROOMOR**



OFFICE SURFACE 293 | OFFICE ON TRACK 395 | SUSPENDED 495 | OFFICE SUSPENDED 499 | WALL 639 | TABLE 725 | FLOOR 735

**DRO**



SURFACE 279 | ON TRACK 373 | SUSPENDED 465 | WALL 623 | TABLE / FLOOR 715 | TABLE 717 | FLOOR 731

**MIRRO**



SURFACE 283 | CEILING SOFT 285 | SUSPENDED 467 | SUSPENDED SOFT 471 | WALL 625 | WALL SOFT 629 | TABLE 721 | FLOOR 733

**J.J.W.**



SURFACE 289 | SUSPENDED 479 | SUSPENDED 481 | WALL 633 | WALL 635

**CLEA**



SURFACE 287 | SUSPENDED 557 | WALL 631

**TRADORA**



SURFACE 775 | SUSPENDED 777 | WALL 823



I MADE YOU LOOK

Schwenkbare Spots wie LECA setzen nicht nur in Hotels, sondern auch zu Hause stilvolle Akzente. Für größere Bereiche gibt es LECA mit mehreren Spots – für gleichmäßiges Licht. Der runde Spot ist als Einbau-, Aufbau-, Snooze- oder STREX-Inset-Leuchte in drei Farben erhältlich.

Des spots orientables comme LECA créent des accents élégants, non seulement dans les hôtels mais aussi à la maison. Pour les espaces plus grands, LECA est disponible avec plusieurs spots – pour un éclairage uniforme. Le spot rond est proposé en version encastrée, en saillie, snooze ou en applique STREX, disponible en trois couleurs.

weverducre.com/leca

# leca





# finlin

FOLLOW THE LINE

Auf den ersten Blick wirkt FINLIN wie eine moderne Skulptur. Doch hinter dem filigranen Design stecken feine Aluminiumrohre, die für eine elegante Optik sorgen. Ob als Decken-, Pendel-, Steh- oder Wandleuchte – FINLIN überzeugt in Schwarz, Gold oder edlem Champagner.

À première vue, FINLIN ressemble à une sculpture moderne. Mais derrière son design délicat se cachent de fins tubes en aluminium pour un rendu élégant. Qu'elle soit plafonnier, suspension, lampadaire ou applique, FINLIN séduit en noir, or ou champagne raffiné.

weverducre.com/finlin

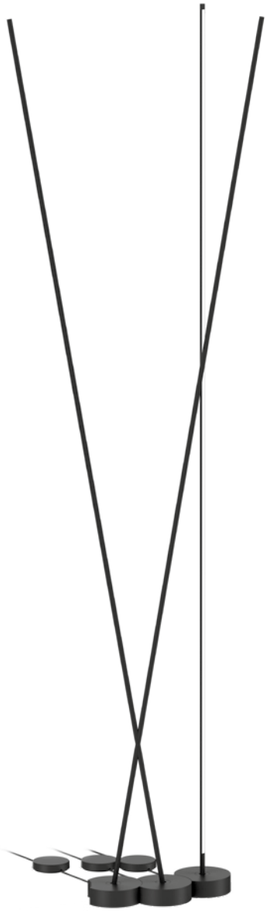

LIGHT A MATCH

Na, schon Feuer gefangen? Kein Wunder. Denn die Leuchten der MATCH-Family sind schlank wie Streichhölzer und lassen sich so ganz gezielt auf Objekte richten. Perfekt, um Bilder und Regale zu highlighten, bessere Sicht auf den Lieblingskrimi zu haben oder die Bar gekonnt in Szene zu setzen. Und das alles in einem klaren und einheitlichen Design.

Alors, vous avez flashé ? Pas étonnant. Les luminaires de la famille MATCH sont élancés comme des allumettes et peuvent être dirigés précisément vers les objets. Parfaits pour mettre en valeur des tableaux et des étagères, améliorer la visibilité de votre roman préféré ou sublimer votre bar. Et tout cela avec un design clair et uniforme.



weverducre.com/match

# match



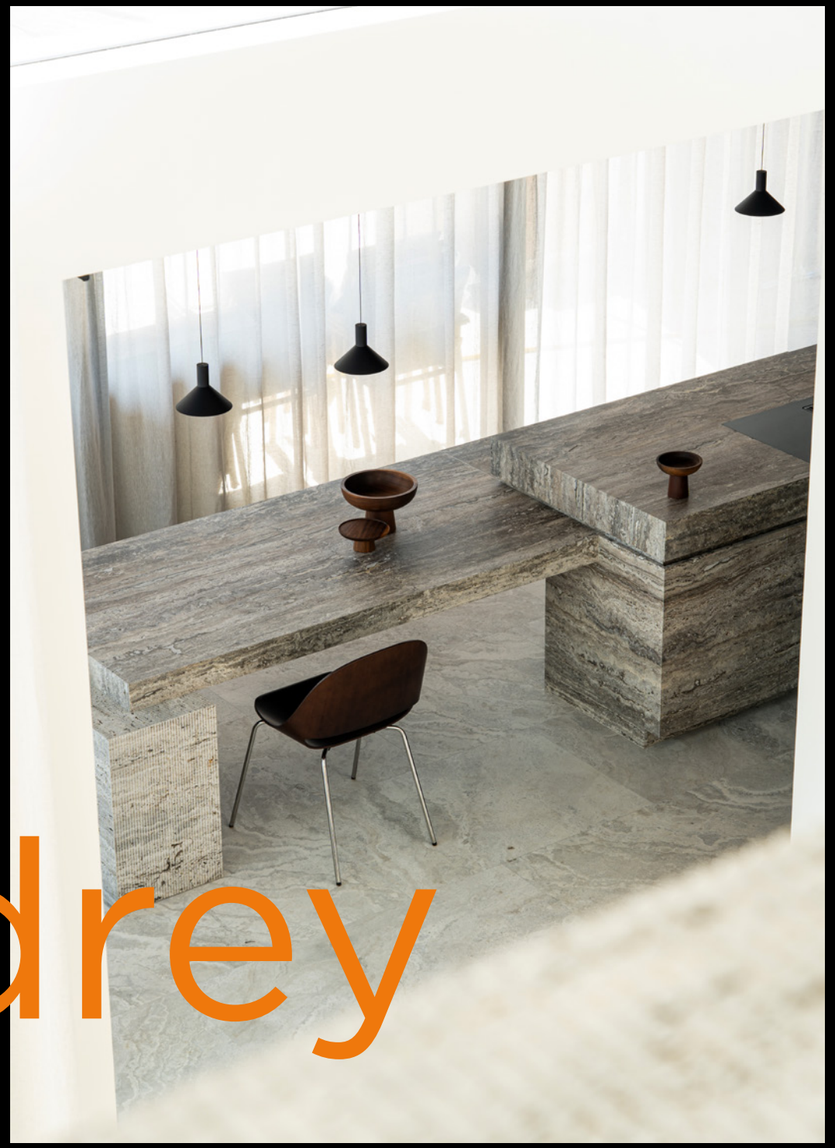

# odrey

LITTLE BLACK LAMP

Sie versprüht den Charme der 50er – und wir reden nicht von Audrey Hepburn, sondern von unserer Leuchte ODREY. Ein echtes Must-have für jede Cocktailparty: wandelbar wie ein Filmstar und in schimmerndem Gold ebenso umwerfend wie in elegantem Schwarz, Bronze, Weiß oder Aluminium.

Elle dégage un charme des années 1950 – et nous ne parlons pas d'Audrey Hepburn, mais de notre luminaire ODREY. Un véritable indispensable pour toute soirée cocktail : aussi polyvalente qu'une star de cinéma et aussi éblouissante en or scintillant, qu'en noir élégant, en bronze, blanc, ou en aluminium.



weverducre.com/odrey

# indoor

# Ceiling recessed

54 – 173

## SPOT LIGHTS



QITO TRIMLESS
57



QITO
59



MATCH POINT TRIMLESS
61



MATCH POINT
61



BLIEK PETIT TRIMLESS
63



BLIEK PETIT
63



BLIEK
67



LINOO TRIMLESS
71



LINOO
71



PIRRO PETIT
75



PIRRO
77



PLANO PETIT
83



PLANO
85



STRANGE PETIT TRIMLESS
87



STRANGE TRIMLESS
89



SNEAK TRIMLESS
91



SNEAK
93



DEEP POINT
97



DEEP BIJOU
99



DEEP PETIT IQ
101



DEEP PETIT
103



DEEP IQ
105



DEEP
107



DEEPER
109



DEEP ADJUST PETIT IQ
111



DEEP ADJUST PETIT TRIMLESS
113



DEEP ADJUST PETIT
113



DEEP ADJUST IQ
115



DEEP ADJUST TRIMLESS
117



DEEP ADJUST
119



RONY POINT
123



RONY PETIT
125



RONY ADJUST PETIT
127



RONY ADJUST
129

## SEMI RECESSED



CENO
131



LECA
135



MATCH TRIMLESS
137



MATCH
137



MATCH SNEAK TRIMLESS
143



MATCH SNEAK
143



MATCH STICK TRIMLESS
145



MATCH STICK
145



RUVI
147

## IP-RATED



PLANO IP44
151



MATCH POINT IP44
153



DEEP POINT IP44
155



DEEP BIJOU IP65
157



DEEP PETIT IP65
159



DEEP IP65 | IP44
161



DEEPER IP44
163



TAIO IP65
165



RINI SNEAK IP44
167



PERLEZ IP44
169



MIRBI IP44 1.0
171



MIRBI IP44 2.0
171



CITY IP44
173



# QITO

*Ceiling* recessed












## 1.0 TRIMLESS

LED COB 5W | 250mA | 18V
aluminium

IP20 0°-35°|360° M-31° L80|50K

| | CHF | CODE |
|---|---|---|
| | 176,65 | 198261W_ |
| | 198,75 | 198261L_ |
| | 198,75 | 198261M_ |
| | 198,75 | 198261Q_ |
| | 198,75 | 198261GM_ |
| | 176,65 | 198261B_ |

| LIGHT COLOUR | LUMEN \| CRI | CODE |
|---|---|---|
| 2700K | 420 \| >90 | 3 |
| 3000K | 440 \| >90 | 5 |







## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

## ALWAYS USE

alu plasterkit 78-80 80 12.5, 15, 20, 25

| | CHF | CODE |
|---|---|---|
| | 30,40 | 90017210 |

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim | 45,55 | 90226201 |
| 10W DALI* | 89,05 | 90246403 |

*revision opening required
more options and specs on page 895

# QITO

*Ceiling* recessed

177



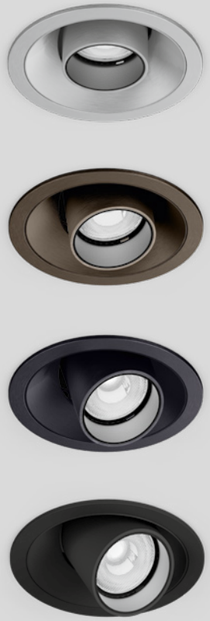

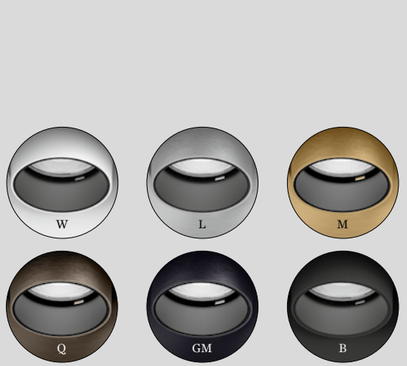





## 1.0

LED COB 5W | 250mA | 18V
aluminium

IP20 0°-35°|360° M-31° L80|50K

blade springs 68-70 60 2-25

| | CHF | CODE |
|---|---|---|
| | 162,85 | 198161W_ |
| | 184,95 | 198161L_ |
| | 184,95 | 198161M_ |
| | 184,95 | 198161Q_ |
| | 184,95 | 198161GM_ |
| | 162,85 | 198161B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 420 | >90 | 3 |
| 3000K | 440 | >90 | 5 |




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

## ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim | 45,55 | 90226201 |
| 10W DALI* | 89,05 | 90246403 |

*revision opening required
more options and specs on page 895



**PRIVATE RESIDENCE** GREECE

# MATCH point

*Ceiling* recessed

reddot winner 2023






ø26




ø35




ø45

## 1.0 TRIMLESS

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

45-47 60 4-26

| | CHF | CODE |
|---|---|---|
| | 113,85 | 191861B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 315 | >90 | 3 |
| 3000K | 335 | >90 | 5 |

## 1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 28-31 50 4-25

| | CHF | CODE |
|---|---|---|
| | 71,80 | 191361W_ |
| | 71,80 | 191361B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 315 | >90 | 3 |
| 3000K | 335 | >90 | 5 |

## 1.0 IP44

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

| | CHF | CODE |
|---|---|---|
| | 89,70 | 191261W_ |
| | 89,70 | 191261B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 295 | >90 | 3 |
| 3000K | 325 | >90 | 5 |




## ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim | 45,55 | 90226201 |
| 10W DALI | 89,05 | 90246403 |

revision opening required
more options and specs on page 895

## ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim | 45,55 | 90226201 |
| 10W DALI | 89,05 | 90246403 |

revision opening required
more options and specs on page 895

## ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim \| IP20 | 45,55 | 90226201 |
| 10W DALI \| IP20* | 89,05 | 90246403 |

*revision opening required
more options and specs on page 895

**LOXONE VERSIONS ONLINE**
weverducre.com/more-match-point

193
329 | 347
415 | 509
571
589 | 685
723 | 729



**RESTAURANT AUX PETITS OIGNONS | COVARTE** JODOIGNE | BELGIUM

# BLIEK petit

*Ceiling* recessed



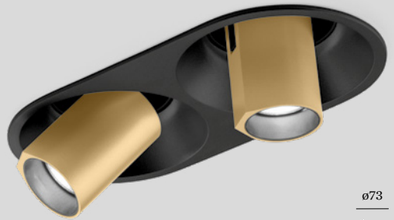















## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

**LOXONE VERSIONS ONLINE**

weverducre.com/more-bliek-petit

## 1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 205,65 | 164561W_ |
| | 205,65 | 164561CH_ |
| | 205,65 | 164561B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 495 | >90 | 3 |
| 3000K | 530 | >90 | 5 |
| 2000-3000K \| 16V | 340 | >90 | 9 |

### ALWAYS USE

alu plasterkit 78-80 85 12.5, 15, 20, 25

| | CHF | CODE |
|---|---|---|
| | 30,40 | 90017210 |

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI | 89,05 | 90243502 |

*revision opening required and
more options and specs on page 898

## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

wire springs 86-89 60 4-23

| | CHF | CODE |
|---|---|---|
| | 191,85 | 164461W_ |
| | 191,85 | 164461CH_ |
| | 191,85 | 164461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 495 | >90 | 3 |
| 3000K | 530 | >90 | 5 |
| 2000-3000K \| 16V | 340 | >90 | 9 |

### ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required and
more options and specs on page 898

## 2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

wire springs 87x176 60 4-23

| | CHF | CODE |
|---|---|---|
| | 328,45 | 164261W_ |
| | 328,45 | 164261CH_ |
| | 328,45 | 164261B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x495 | >90 | 3 |
| 3000K | 2x530 | >90 | 5 |

### ALWAYS USE

driver | 700mA | only 1x needed

| | CHF | CODE |
|---|---|---|
| 14W dim | 53,85 | 90225502 |
| 28W DALI | 92,50 | 90245704 |

more options and specs on page 900





**PRIVATE RESIDENCE | UMAMI STUDIO** BELGIUM

# BLIEK

*Ceiling* recessed







**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-bliek-round

IC rated




## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-60°|355° M-33° L80|55K

wire springs 127 75 4-25

| | CHF | CODE |
|---|---|---|
| | 288,45 | 125361W_ |
| | 288,45 | 125361K_ |
| | 288,45 | 125361B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 600/810 | >90 | 3 |
| 3000K | 635/855 | >90 | 5 |
| 4000K | 670/905 | >90 | 7 |
| 2000-3000K | 445/660 | >90 | 9 |

LED module 20 years replaceability

## ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898




## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-60°|350°

wire springs 127 75 4-25

| | CHF | CODE |
|---|---|---|
| | 204,25 | 125120W0 |
| | 204,25 | 125120K0 |
| | 204,25 | 125120B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

# hidden

HIDDEN CHAMPIONS

Schlichte Einbauleuchten rücken dezent in den Hintergrund und setzen jeden Raum perfekt in Szene. Doch niedrige Decken oder wenig Platz machen den Einbau oft schwierig. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré – kompakt, stilvoll und ideal für Renovierungen und kleine Apartments.

Des luminaires encastrés discrets restent élégants en arrière-plan tout en sublimant chaque pièce. Mais les plafonds bas ou l'espace limité compliquent souvent l'installation. La solution : des luminaires encastrés ultra-plats de Wever & Ducré – compacts, élégants et idéals pour les rénovations et les petits appartements.


| | | |
|---|---|---|
| QITO 1.0 | p. 57 | 60 mm |
| MATCH point 1.0 trimless | p. 61 | 60 mm |
| MATCH point 1.0 | p. 61 | 50 mm |
| BLIEK petit 1.0 \| 2.0 | p. 63 | 60 mm |
| LINOO | p. 71 | 60 mm |
| PIRRO petit | p. 75 | 60 mm |
| PIRRO 2.0 \| 4.0 \| 6.0 | p. 77 | 60 mm |
| PLANO petit | p. 83 | 65 mm |
| STRANGE petit trimless | p. 87 | 65 mm |
| DEEP bijou 2.0 | p. 99 | 67 mm |
| DEEP petit | p. 103 | 60 mm |
| DEEP ADJUST petit | p. 113 | 65 mm |
| RONY point | p. 123 | 60 mm |
| RONY petit | p. 125 | 51 mm |
| RONY ADJUST petit | p. 127 | 63 mm |
| CENO 2.0 \| 3.0 | p. 133 | 60 mm |
| MATCH 1.0 trimless | p. 137 | 67 mm |
| MATCH 2.0 | p. 141 | 60 mm |
| MATCH sneak | p. 143 | 53 mm |
| MATCH stick 1.0 \| 1.0 trimless | p. 145 | 67 mm |
| DEEP petit IP65 | p. 159 | 60 mm |
| RINI SNEAK IP44 | p. 167 | 52 mm |
| MIRBI IP44 | p. 171 | 50 mm |
| CITY IP44 | p. 173 | 50 mm |






# LINOO

*Ceiling* recessed


















## 1.0 TRIMLESS

LED PCB 3W | 350mA | 6V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 54-58 60 4-26

2700K/3000K | CRI >90 | 125lm

| | CHF | CODE |
|---|---|---|
| | 121,45 | 109961WW9 |
| | 121,45 | 109961BB9 |

## ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 3.5W | 46,95 | 90213102 |
| 7W dim* | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required and
2 fixtures needed
more options and specs on page 896

## 1.0

LED PCB 3W | 350mA | 6V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 36x39 60 4-28

2700K/3000K | CRI >90 | 125lm

| | CHF | CODE |
|---|---|---|
| | 77,30 | 109461WW9 |
| | 77,30 | 109461BB9 |

## ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 3.5W | 46,95 | 90213102 |
| 7W dim* | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required and
2 fixtures needed
more options and specs on page 896

## 2.0

LED PCB 5W | 350mA | 12V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 36x67 60 4-28

2700K/3000K | CRI >90 | 2x125lm

| | CHF | CODE |
|---|---|---|
| | 103,50 | 109561WW9 |
| | 103,50 | 109561BB9 |

## ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim* | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896











# LINOO

*Ceiling* recessed

211












60 mm
low recessed

UGR ≤ 16
65°≤ 3000cd

2700K – 3000K adjustment switch

## 4.0

LED PCB 8W | 350mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 118x36 60 4-28

2700K/3000K | CRI >90 | 4x125lm

| | CHF | CODE |
|---|---|---|
| | 135,25 | 109161WW9 |
| | 135,25 | 109161BB9 |

### ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 10W dim | 49,00 | 90223406 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896

## 4.1

LED PCB 8W | 350mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 63x59 60 4-28

2700K/3000K | CRI >90 | 4x125lm

| | CHF | CODE |
|---|---|---|
| | 127,00 | 109261WW9 |
| | 127,00 | 109261BB9 |

### ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 10W dim | 49,00 | 90223406 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896

## 8.0

LED PCB 16W | 700mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 226x36 60 4-28

2700K/3000K | CRI >90 | 8x125lm

| | CHF | CODE |
|---|---|---|
| | 218,05 | 109361WW9 |
| | 218,05 | 109361BB9 |

### ALWAYS USE

driver | 700mA

| | CHF | CODE |
|---|---|---|
| 20W dim | 62,80 | 90225604 |
| 14W DALI | 92,50 | 90245704 |

more options and specs on page 900



**PRIVATE RESIDENCE | ORNELLA ABOUAF** FRANCE

# PIRRO petit

*Ceiling* recessed

213

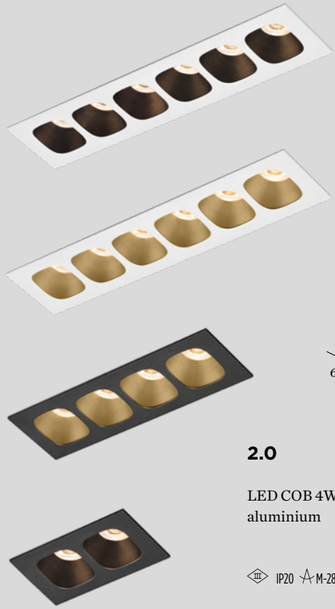










## 2.0

LED COB 4W | 350mA | 12V
aluminium

IP20 M-28° L80|50K

wire springs 64x33 60 4-25

| | CHF | CODE |
|---|---|---|
| | 113,20 | 129151E_ |
| | 113,20 | 129151WM_ |
| | 113,20 | 129151CH_ |
| | 113,20 | 129151B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x160 | >90 | 3 |
| 3000K | 2x165 | >90 | 5 |

### ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 4.5W dim | 45,55 | 90223101 |
| 14W DALI | 89,05 | 90243502 |

revision opening required
more options and specs on page 897

## 4.0

LED COB 8W | 350mA | 24V
aluminium

IP20 M-28° L80|50K

wire springs 116x33 60 4-25

| | CHF | CODE |
|---|---|---|
| | 176,65 | 129251E_ |
| | 176,65 | 129251WM_ |
| | 176,65 | 129251CH_ |
| | 176,65 | 129251B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x160 | >90 | 3 |
| 3000K | 4x165 | >90 | 5 |

### ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 10W dim | 49,00 | 90223406 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896

## 6.0

LED COB 12W | 350mA | 36V
aluminium

IP20 M-28° L80|50K

wire springs 168x33 60 4-25

| | CHF | CODE |
|---|---|---|
| | 245,65 | 129351E_ |
| | 245,65 | 129351WM_ |
| | 245,65 | 129351CH_ |
| | 245,65 | 129351B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 6x160 | >90 | 3 |
| 3000K | 6x165 | >90 | 5 |

### ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 13W dim | 58,65 | 90223404 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896







**LOXONE VERSIONS ONLINE**
weverducre.com/more-pirro-petit



LA PARISIENNE | I:ARHITEKT LJUBOVIC | MONTENEGRO

# PIRRO

*Ceiling* recessed











## 1.0

LED COB 5W | 500mA | 9V
aluminium

IP20 M-32° L70|55K

wire springs 50x50 60 4-25

| | CHF | CODE |
|---|---|---|
| | 107,65 | 150161E_ |
| | 107,65 | 150161J_ |
| | 107,65 | 150161K_ |
| | 107,65 | 150161B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 395 | >90 | 3 |
| 3000K | 410 | >90 | 5 |

## 2.0

LED COB 9W | 500mA | 18V
aluminium

IP20 M-32° L70|55K

wire springs 93x50 60 4-25

| | CHF | CODE |
|---|---|---|
| | 135,25 | 150261E_ |
| | 135,25 | 150261J_ |
| | 135,25 | 150261K_ |
| | 135,25 | 150261B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x395 | >90 | 3 |
| 3000K | 2x410 | >90 | 5 |

60 mm
low recessed

IC rated

## ALWAYS USE

driver | 500mA

| | CHF | CODE |
|---|---|---|
| 6W | 45,55 | 90214201 |
| 6.5W dim* | 35,20 | 90224301 |
| 24W DALI* | 92,50 | 90244701 |

*revision opening required
more options and specs on page 897

## ALWAYS USE

driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 24W DALI | 92,50 | 90244701 |

more options and specs on page 897



**PRIVATE RESIDENCE | INTERIOR STUDIO VAN MAANEN** THE NETHERLANDS

# PIRRO

*Ceiling* recessed

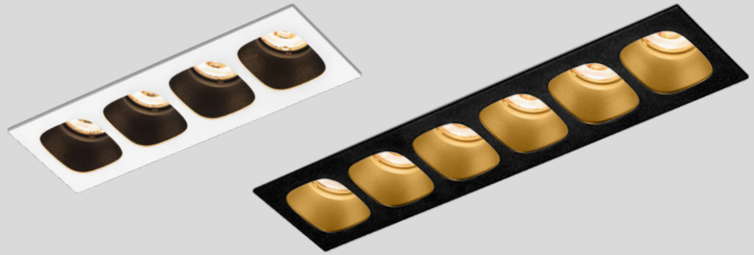







## 4.0

LED COB 17W | 500mA | 36V
aluminium

IP20 M-32° L70|55K

wire springs 181x50 60 4-25

| | CHF | CODE |
|---|---|---|
| | 205,65 | 150461E_ |
| | 205,65 | 150461J_ |
| | 205,65 | 150461K_ |
| | 205,65 | 150461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x395 | >90 | 3 |
| 3000K | 4x410 | >90 | 5 |

## 6.0

LED COB 25W | 500mA | 2x27V
aluminium

IP20 M-32° L70|55K

wire springs 269x50 60 4-25

| | CHF | CODE |
|---|---|---|
| | 273,25 | 150661E_ |
| | 273,25 | 150661J_ |
| | 273,25 | 150661K_ |
| | 273,25 | 150661B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 6x395 | >90 | 3 |
| 3000K | 6x410 | >90 | 5 |

60 mm
low recessed

IC rated

## ALWAYS USE

driver | 500mA | only 1x needed

| | CHF | CODE |
|---|---|---|
| 17.5W | 53,85 | 90218601 |
| 19W dim | 62,80 | 90224602 |
| 24W DALI | 92,50 | 90244701 |

more options and specs on page 898

## ALWAYS USE

driver | 500mA | 2x needed

| | CHF | CODE |
|---|---|---|
| 17.5W | 53,85 | 90218601 |
| 19W dim | 62,80 | 90224602 |
| 24W DALI | 92,50 | 90244701 |

more options and specs on page 898


Kingsley
Anne



PRIVATE RESIDENCE | ANKER & CO DENMARK

# PLANO petit

*Ceiling* recessed


















## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x59 65 2-22

| | CHF | CODE |
|---|---|---|
| | 135,25 | 162461W_ |
| | 135,25 | 162461Q_ |
| | 135,25 | 162461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 550 | >90 | 3 |
| 3000K | 580 | >90 | 5 |
| 2000-3000K \| 16V | 465 | >90 | 9 |

LED module 20 years replaceability

### ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896

## 2.0

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x110 65 2-22

| | CHF | CODE |
|---|---|---|
| | 233,25 | 162561W_ |
| | 233,25 | 162561Q_ |
| | 233,25 | 162561B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x550 | >90 | 3 |
| 3000K | 2x580 | >90 | 5 |
| 2000-3000K \| 16V | 2x465 | >90 | 9 |

LED module 20 years replaceability

### ALWAYS USE

quick connect driver | 350mA
2x needed

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896

## 3.0

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x162 65 2-22

| | CHF | CODE |
|---|---|---|
| | 328,45 | 162661W_ |
| | 328,45 | 162661Q_ |
| | 328,45 | 162661B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3x550 | >90 | 3 |
| 3000K | 3x580 | >90 | 5 |
| 2000-3000K \| 16V | 3x465 | >90 | 9 |

LED module 20 years replaceability

### ALWAYS USE

quick connect driver | 350mA
3x needed

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896




**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-plano-petit



**PRIVATE RESIDENCE | STUDIO BENOIT** BELGIUM

# PLANO

*Ceiling* recessed



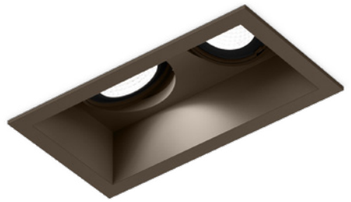













## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 74x78 95 2-18

| | CHF | CODE |
|---|---|---|
| | 142,15 | 118561W_ |
| | 142,15 | 118561Q_ |
| | 142,15 | 118561B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 610/820 | >90 | 3 |
| 3000K | 645/870 | >90 | 5 |
| 2000-3000K | 450/665 | >90 | 9 |

LED module 20 years replaceability

### ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## 2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 74x148 95 2-18

| | CHF | CODE |
|---|---|---|
| | 260,85 | 118661W_ |
| | 260,85 | 118661Q_ |
| | 260,85 | 118661B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x610/820 | >90 | 3 |
| 3000K | 2x645/870 | >90 | 5 |
| 2000-3000K | 2x450/665 | >90 | 9 |

LED module 20 years replaceability

### ALWAYS USE

quick connect driver | 500mA
2x needed

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 74x78 125 2-18

| | CHF | CODE |
|---|---|---|
| | 67,65 | 118120W0 |
| | 67,65 | 118120Q0 |
| | 67,65 | 118120B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 74x148 125 2-18

| | CHF | CODE |
|---|---|---|
| | 113,20 | 118220W0 |
| | 113,20 | 118220Q0 |
| | 113,20 | 118220B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**PRIVATE RESIDENCE** SPAIN

# STRANGE petit

*Ceiling* recessed














## 1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355°- M-31° L80|55K

| | CHF | CODE |
|---|---|---|
| | 142,15 | 163461W_ |
| | 142,15 | 163461M_ |
| | 142,15 | 163461Q_ |
| | 142,15 | 163461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 550 | >90 | 3 |
| 3000K | 580 | >90 | 5 |
| 2000-3000K | 465 | >90 | 9 |

LED module 20 years replaceability

## ALWAYS USE

alu plasterkit U 64x64 65 7-32

| | CHF | CODE |
|---|---|---|
| | 51,10 | 90017202 |

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896

## 2.0 TRIMLESS

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355°- M-31° L80|55K

| | CHF | CODE |
|---|---|---|
| | 245,65 | 163561W_ |
| | 245,65 | 163561M_ |
| | 245,65 | 163561Q_ |
| | 245,65 | 163561B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x550 | >90 | 3 |
| 3000K | 2x580 | >90 | 5 |
| 2000-3000K | 2x465 | >90 | 9 |

LED module 20 years replaceability

## ALWAYS USE

alu plasterkit U 64x117 65 7-32

| | CHF | CODE |
|---|---|---|
| | 53,85 | 90017205 |

quick connect driver | 350mA
2x needed

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 897

## 3.0 TRIMLESS

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355°- M-31° L80|55K

| | CHF | CODE |
|---|---|---|
| | 346,40 | 163661W_ |
| | 346,40 | 163661M_ |
| | 346,40 | 163661Q_ |
| | 346,40 | 163661B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3x550 | >90 | 3 |
| 3000K | 3x580 | >90 | 5 |
| 2000-3000K | 3x465 | >90 | 9 |

LED module 20 years replaceability

## ALWAYS USE

alu plasterkit U 64x169 65 7-32

| | CHF | CODE |
|---|---|---|
| | 59,35 | 90017208 |

quick connect driver | 350mA
3x needed

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896




**LOXONE VERSIONS ONLINE**
weverducre.com/more-strange-petit



**VULÉ LUXURY APARTMENTS MILANO | MAST ARCHITECTURE** MILAN | ITALY

# STRANGE trimless

*Ceiling* recessed

















## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

| | CHF | CODE |
|---|---|---|
| | 153,20 | 131461W_ |
| | 153,20 | 131461Q_ |
| | 153,20 | 131461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 610/820 | >90 | 3 |
| 3000K | 645/870 | >90 | 5 |
| 2000-3000K | 450/665 | >90 | 9 |

LED module 20 years replaceability

### ALWAYS USE

alu plasterkit 86x86 95 7-32

| | CHF | CODE |
|---|---|---|
| | 56,60 | 90017120 |

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## 2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

| | CHF | CODE |
|---|---|---|
| | 290,50 | 131561W_ |
| | 290,50 | 131561Q_ |
| | 290,50 | 131561B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x610/820 | >90 | 3 |
| 3000K | 2x645/870 | >90 | 5 |
| 2000-3000K | 2x450/665 | >90 | 9 |

LED module 20 years replaceability

### ALWAYS USE

alu plasterkit 86x156 95 7-32

| | CHF | CODE |
|---|---|---|
| | 62,10 | 90017121 |

quick connect driver | 500mA
2x needed

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

| | CHF | CODE |
|---|---|---|
| | 78,70 | 131120W0 |
| | 78,70 | 131120Q0 |
| | 78,70 | 131120B0 |

### ALWAYS USE

alu plasterkit 86x86 125 7-32

| | CHF | CODE |
|---|---|---|
| | 56,60 | 90017120 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

| | CHF | CODE |
|---|---|---|
| | 142,85 | 131220W0 |
| | 142,85 | 131220Q0 |
| | 142,85 | 131220B0 |

### ALWAYS USE

alu plasterkit 86x156 125 7-32

| | CHF | CODE |
|---|---|---|
| | 62,10 | 90017121 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**PRIVATE RESIDENCE | STUDIO BENOIT** BELGIUM

# SNEAK

*Ceiling* recessed













## 1.0 TRIMLESS

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

| | CHF | CODE |
|---|---|---|
| | 171,15 | 155551WW_ |
| | 175,30 | 155551BM_ |
| | 171,15 | 155551BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 340/460 | >90 | 3 |
| 3000K | 360/485 | >90 | 5 |
| 2000-3000K | 250/370 | >90 | 9 |

LED module 20 years replaceability

## 2.0 TRIMLESS

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

| | CHF | CODE |
|---|---|---|
| | 326,40 | 155651WW_ |
| | 334,65 | 155651BM_ |
| | 326,40 | 155651BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x340/460 | >90 | 3 |
| 3000K | 2x360/485 | >90 | 5 |
| 2000-3000K | 2x250/370 | >90 | 9 |

LED module 20 years replaceability

## ALWAYS USE

alu plasterkit 86x86 95 7-32

| | CHF | CODE |
|---|---|---|
| | 56,60 | 90017120 |

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## ALWAYS USE

alu plasterkit 86x156 95 7-32

| | CHF | CODE |
|---|---|---|
| | 62,10 | 90017121 |

quick connect driver | 500mA
2x needed

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

**LOXONE VERSIONS ONLINE**
weverducre.com/more-sneak



**PRIVATE RESIDENCE | RARDO ARCHITECTS** SPAIN

# SNEAK

*Ceiling* recessed











## 1.0

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

wire springs 74x78 95 2-18

| | CHF | CODE |
|---|---|---|
| | 160,10 | 155751WW_ |
| | 164,25 | 155751BM_ |
| | 160,10 | 155751BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 340/460 | >90 | 3 |
| 3000K | 360/485 | >90 | 5 |
| 2000-3000K | 250/370 | >90 | 9 |

LED module 20 years replaceability

## ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## 2.0

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

wire springs 74x148 95 2-18

| | CHF | CODE |
|---|---|---|
| | 296,70 | 155851WW_ |
| | 305,00 | 155851BM_ |
| | 296,70 | 155851BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x340/460 | >90 | 3 |
| 3000K | 2x360/485 | >90 | 5 |
| 2000-3000K | 2x250/370 | >90 | 9 |

LED module 20 years replaceability

## ALWAYS USE

quick connect driver | 500mA
2x needed

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

**LOXONE VERSIONS ONLINE**
weverducre.com/more-sneak

# deep how

weverducre.com/deep

## DEEP



**point 1.0**
LED
p. 97



**bijou 1.0**
LED
p. 99



**bijou 2.0**
LED
p. 99



**petit 1.0**
LED
p. 103



**1.0**
LED | PAR16
p. 107



**point IP44 1.0**
LED
p. 155



**bijou IP65 1.0**
LED
p. 157



**petit IP65 1.0**
LED
p. 159



**IP65 | IP44 1.0**
LED | PAR16
p. 161

## DEEP ADJUST



**petit 1.0**
LED
p. 113



**petit trimless 1.0**
LED
p. 113



**1.0**
LED | PAR16
p. 119



**trimless 1.0**
LED | PAR16
p. 117



**2.0**
LED | PAR16
p. 121

## DEEP CONNECTIONS

DEEP und DEEPER liefern klassisches Downlight für Flur, Wohnzimmer oder Bad – auf Wunsch auch als IP44 oder IP65 für spritz- und strahlwassergeschützte Anwendungen. Ergänzt wird die Familie nun durch DEEP IQ aus 3D-gedrucktem Material sowie die nahezu unsichtbaren Trimless-ADJUST-Varianten.

DEEP et DEEPER offrent un éclairage directionnel classique pour les couloirs, salons ou salles de bain – en option en IP44 ou IP65 pour une protection contre les éclaboussures et les jets d'eau. La gamme s'enrichit désormais de DEEP IQ en matériau imprimé en 3D, ainsi que des variantes ADJUST sans cadre presque invisibles.

## DEEPER



**1.0**
LED | PAR16
p. 109



**IP44 1.0**
LED | PAR16
p. 163

## DEEP IQ



**petit 1.0**
LED
p. 101



**1.0**
LED
p. 105

## DEEP ADJUST IQ



**petit 1.0**
LED
p. 111



**1.0**
LED
p. 115



**PRIVATE RESIDENCE** SPAIN

# DEEP point

*Ceiling* recessed









## 1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 40-41 68 4-25

| | CHF | CODE |
|---|---|---|
| | 67,65 | 185261W_ |
| | 67,65 | 185261M_ |
| | 67,65 | 185261Q_ |
| | 67,65 | 185261B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 405 | >90 | 3 |
| 3000K | 425 | >90 | 5 |

## ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim | 45,55 | 90226201 |
| 10W DALI | 89,05 | 90246403 |

revision opening required
more options and specs on page 895

## 1.0 IP44

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

| | CHF | CODE |
|---|---|---|
| | 85,60 | 185161W_ |
| | 85,60 | 185161Q_ |
| | 85,60 | 185161B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 355 | >90 | 3 |
| 3000K | 400 | >90 | 5 |

## ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim | 45,55 | 90226201 |
| 10W DALI | 89,05 | 90246403 |

revision opening required
more options and specs on page 895

**LOXONE VERSIONS ONLINE**
weverducre.com/more-deep-point

IC rated

155



PRIVATE RESIDENCE | ARNOLD ORY FRANCE

# DEEP bijou

*Ceiling* recessed











## 1.0

LED COB 4W | 250mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs 50-52 85 4-25

| | CHF | CODE |
|---|---|---|
| | 78,70 | 165161W_ |
| | 78,70 | 165161M_ |
| | 78,70 | 165161G_ |
| | 78,70 | 165161Q_ |
| | 78,70 | 165161B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 480 | >90 | 3 |
| 3000K | 510 | >90 | 5 |

### ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim | 45,55 | 90226201 |
| 10W DALI* | 89,05 | 90246403 |

*revision opening required
more options and specs on page 895

## 2.0

2x LED COB 4W | 250mA | 34V
aluminium

IP20 M-31° L80|50K

wire springs 50-52x100-104 67 4-25

| | CHF | CODE |
|---|---|---|
| | 150,45 | 165261W_ |
| | 150,45 | 165261M_ |
| | 150,45 | 165261G_ |
| | 150,45 | 165261Q_ |
| | 150,45 | 165261B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x480 | >90 | 3 |
| 3000K | 2x510 | >90 | 5 |

### ALWAYS USE

quick connect driver | 250mA
only 1x needed

| | CHF | CODE |
|---|---|---|
| 10.5W dim | 45,55 | 90226501 |
| 10W DALI | 89,05 | 90246403 |

more options and specs on page 895







**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-deep-bijou

# DEEP petit IQ

*Ceiling* recessed






## 1.0

LED COB 3W | 200mA | 18V
recycled PET for RP
others 3D printed ASA

IP20 W-41° L80|80K

blade springs 74-76 .85 min.8

| | CHF | CODE |
|---|---|---|
| | 121,45 | 199151W_ |
| | 121,45 | 199151SG_ |
| | 121,45 | 199151RP_ |
| | 121,45 | 199151B_ |

| LIGHT COLOUR | LUMEN \| CRI | CODE |
|---|---|---|
| 2700K | 360 \| >90 | 3 |
| 3000K | 370 \| >90 | 5 |

high efficient LED

reduced $CO_2$

3D printed by IQ LUX

## ALWAYS USE

quick connect driver | 200mA

| | CHF | CODE |
|---|---|---|
| 10W dim* | 45,55 | 90226402 |
| 8W DALI | 89,05 | 90246302 |

*min. 2 luminaires per driver
more options and specs on page 894

**MORE VERSIONS ONLINE**
weverducre.com/more-deep-petit-IQ

LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | ROOD3 INTERIEURONTWERP** BELGIUM

# DEEP petit

*Ceiling* recessed

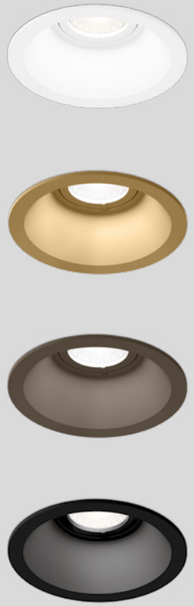







## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs ⌀68-70 60 4-23

| | CHF | CODE |
|---|---|---|
| | 109,05 | 153561W_ |
| | 109,05 | 153561M_ |
| | 109,05 | 153561G_ |
| | 109,05 | 153561Q_ |
| | 109,05 | 153561B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 615 | >90 | 3 |
| 3000K | 650 | >90 | 5 |
| 2000-3000K \| 16V | 465 | >90 | 9 |

## 1.0 IP65

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs ⌀68-70 60 4-25

| | CHF | CODE |
|---|---|---|
| | 132,50 | 153761W_ |
| | 132,50 | 153761Q_ |
| | 132,50 | 153761B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 590 | >90 | 3 |
| 3000K | 615 | >90 | 5 |







## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896

## ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W \| IP20 | 35,20 | 90213303 |
| 10w dim \| IP20 | 49,00 | 90223406 |
| 17W \| IP68* | 95,25 | 90213602 |

*revision opening required
more options and specs on page 896

**LOXONE VERSIONS ONLINE**
weverducre.com/more-deep-petit

743



# DEEP IQ

*Ceiling* recessed












## 1.0

LED COB 6W | 180mA | 36V
recycled PET for RP
others 3D printed ASA

IP20 M-40° L80|80K

blade springs 85-87 77 min.8

| | CHF | CODE |
|---|---|---|
| | 144,90 | 199351W_ |
| | 144,90 | 199351SG_ |
| | 144,90 | 199351RP_ |
| | 144,90 | 199351B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 780 | >90 | 3 |
| 3000K | 800 | >90 | 5 |

high efficient LED

reduced $CO_2$

3D printed by IQ LUX

## ALWAYS USE

quick connect driver | 180mA

| | CHF | CODE |
|---|---|---|
| 7.5W dim | 45,55 | 90226202 |
| 7.2W DALI | 89,05 | 90246301 |

more options and specs on page 894

**MORE VERSIONS ONLINE**
weverducre.com/more-deep-IQ

LAMP-CONCEPT.CH

back



**LOOTENS | OR ARCHITECTEN | WIM LAHOUSSE** HARELBEKE | BELGIUM

# DEEP

*Ceiling* recessed















## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 M-34° L80|55K

wire springs 76-79 90 4-27

| | CHF | CODE |
|---|---|---|
| | 131,10 | 184261W_ |
| | 131,10 | 184261M_ |
| | 131,10 | 184261G_ |
| | 131,10 | 184261Q_ |
| | 131,10 | 184261B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 635/855 | >90 | 3 |
| 3000K | 670/905 | >90 | 5 |
| 4000K | 710/955 | >90 | 7 |
| 2000-3000K | 470/695 | >90 | 9 |

LED module 20 years replaceability

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

wire springs 76-79 115 4-27

| | CHF | CODE |
|---|---|---|
| | 40,05 | 112120W0 |
| | 40,05 | 112120M0 |
| | 40,05 | 112120G0 |
| | 40,05 | 112120Q0 |
| | 40,05 | 112120B0 |

## ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-deep

LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | STUDIO ZUYD** THE NETHERLANDS

# DEEPER

*Ceiling* recessed









## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 M-34° L80|55K

wire springs 76-79 90 4-38

| | CHF | CODE |
|---|---|---|
| | 141,45 | 152361W_ |
| | 141,45 | 152361M_ |
| | 141,45 | 152361Q_ |
| | 141,45 | 152361B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 635/850 | >90 | 3 |
| 3000K | 670/900 | >90 | 5 |
| 2000-3000K | 470/695 | >90 | 9 |

LED module 20 years replaceability

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

wire springs 76-79 120 4-38

| | CHF | CODE |
|---|---|---|
| | 66,95 | 152120W0 |
| | 66,95 | 152120M0 |
| | 66,95 | 152120Q0 |
| | 66,95 | 152120B0 |

## ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-deeper



# DEEP ADJUST petit IQ

*Ceiling* recessed












## 1.0

LED COB 3W | 200mA | 18V
recycled PET for RP
others 3D printed ASA

IP20 0°-25°|360° W-41° L80|80K

blade springs 74-76 1.87 min.8

| | CHF | CODE |
|---|---|---|
| | 135,25 | 199251W_ |
| | 135,25 | 199251SG_ |
| | 135,25 | 199251RP_ |
| | 135,25 | 199251B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 360 | >90 | 3 |
| 3000K | 370 | >90 | 5 |

high efficient LED

reduced $CO_2$

3D printed by IQ LUX

## ALWAYS USE

quick connect driver | 200mA

| | CHF | CODE |
|---|---|---|
| 10W dim* | 45,55 | 90226402 |
| 8W DALI | 89,05 | 90246302 |

*2 luminaires per driver
more options and specs on page 894

**MORE VERSIONS ONLINE**
weverducre.com/more-deep-adjust-petit-IQ

LAMP-CONCEPT.CH

back



**DU ROC SUISSE | BOCION & BILLIGER SA** ZUG | SWITZERLAND

# DEEP ADJUST petit

*Ceiling* recessed

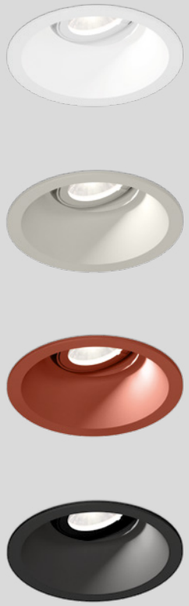







## 1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|360° M-31° L70|50K

| | CHF | CODE |
|---|---|---|
| | 128,35 | 153461W_ |
| | 128,35 | 153461Q_ |
| | 128,35 | 153461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 555 | >90 | 3 |
| 3000K | 585 | >90 | 5 |
| 2000-3000K \| 16V | 470 | >90 | 9 |

LED module 20 years replaceability

## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|355° M-31° L70|50K

wire springs 68-70 65 4-23

| | CHF | CODE |
|---|---|---|
| | 123,55 | 153661W_ |
| | 123,55 | 153661M_ |
| | 123,55 | 153661G_ |
| | 123,55 | 153661SG_ |
| | 123,55 | 153661ME_ |
| | 123,55 | 153661Q_ |
| | 123,55 | 153661B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 555 | >90 | 3 |
| 3000K | 585 | >90 | 5 |
| 2000-3000K \| 16V | 470 | >90 | 9 |

LED module 20 years replaceability

## ALWAYS USE

alu plasterkit 78-80 65 12.5, 15, 20, 25

| | CHF | CODE |
|---|---|---|
| | 30,40 | 90017210 |

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required and
more options and specs on page 896

## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required and
more options and specs on page 896







**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-deep-adjust-petit



# DEEP ADJUST IQ

*Ceiling* recessed












## 1.0

LED COB 6W | 180mA | 36V
recycled PET for RP
others 3D printed ASA

IP20 0°-21°|360° M-40° L80|80K

blade springs 85-87 85 min.8

| | CHF | CODE |
|---|---|---|
| | 160,10 | 199451W_ |
| | 160,10 | 199451SG_ |
| | 160,10 | 199451RP_ |
| | 160,10 | 199451B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 780 | >90 | 3 |
| 3000K | 800 | >90 | 5 |

high efficient LED

reduced $CO_2$

3D printed by IQ LUX

## ALWAYS USE

quick connect driver | 180mA

| | CHF | CODE |
|---|---|---|
| 7W dim | 45,55 | 90226202 |
| 7.2W DALI | 89,05 | 90246301 |

more options and specs on page 894

**MORE VERSIONS ONLINE**
weverducre.com/more-deep-adjust-IQ

LAMP-CONCEPT.CH

back



# DEEP ADJUST trimless

*Ceiling* recessed















## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

| | CHF | CODE |
|---|---|---|
| | 151,80 | 184861W_ |
| | 151,80 | 184861M_ |
| | 151,80 | 184861Q_ |
| | 151,80 | 184861B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 635/855 | >90 | 3 |
| 3000K | 670/905 | >90 | 5 |
| 4000K | 710/955 | >90 | 7 |
| 2000-3000K | 470/695 | >90 | 9 |

LED module 20 years replaceability

### ALWAYS USE

alu plasterkit ⌀105-110 95 12.5, 15, 20, 25

| | CHF | CODE |
|---|---|---|
| | 35,90 | 90017209 |

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

| | CHF | CODE |
|---|---|---|
| | 77,30 | 112820W0 |
| | 77,30 | 112820M0 |
| | 77,30 | 112820Q0 |
| | 77,30 | 112820B0 |

### ALWAYS USE

alu plasterkit ⌀105-110 120 12.5, 15, 20, 25

| | CHF | CODE |
|---|---|---|
| | 35,90 | 90017209 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-deep-adjust-trimless



**PRIVATE RESIDENCE | AJ ARCHITECTEN** BELGIUM

# DEEP ADJUST

*Ceiling* recessed















## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 86-89 90 4-23

| | CHF | CODE |
|---|---|---|
| | 135,95 | 184361W_ |
| | 135,95 | 184361M_ |
| | 135,95 | 184361G_ |
| | 135,95 | 184361Q_ |
| | 135,95 | 184361B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 635/855 | >90 | 3 |
| 3000K | 670/905 | >90 | 5 |
| 4000K | 710/955 | >90 | 7 |
| 2000-3000K | 470/695 | >90 | 9 |

LED module 20 years replaceability

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 86-89 115 4-23

| | CHF | CODE |
|---|---|---|
| | 61,45 | 112320W0 |
| | 61,45 | 112320M0 |
| | 61,45 | 112320G0 |
| | 61,45 | 112320Q0 |
| | 61,45 | 112320B0 |

## ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-deep-adjust

LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | INTÉRIEURS D'ARCHITECTES** FRANCE

# DEEP ADJUST

*Ceiling* recessed









## 2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 89x172-178 90 4-23

| | CHF | CODE |
|---|---|---|
| | 265,00 | 184761W_ |
| | 265,00 | 184761M_ |
| | 265,00 | 184761Q_ |
| | 265,00 | 184761B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x635/855 | >90 | 3 |
| 3000K | 2x670/905 | >90 | 5 |
| 4000K | 2x710/955 | >90 | 7 |
| 2000-3000K | 2x470/695 | >90 | 9 |

LED module 20 years replaceability

## 2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 89x172-178 115 4-23

| | CHF | CODE |
|---|---|---|
| | 117,30 | 112720W0 |
| | 117,30 | 112720M0 |
| | 117,30 | 112720Q0 |
| | 117,30 | 112720B0 |

## ALWAYS USE

quick connect driver | 500mA
2x needed

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**LOXONE VERSIONS ONLINE**
weverducre.com/more-deep-adjust

LAMP-CONCEPT.CH

back



# RONY point

*Ceiling* recessed






## 1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 48-51 60 4-25

| | CHF | CODE |
|---|---|---|
| | 75,90 | 193161W_ |
| | 75,90 | 193161Q_ |
| | 75,90 | 193161B_ |

| LIGHT COLOUR | LUMEN\|CRI | CODE |
|---|---|---|
| 2700K | 405\|>90 | 3 |
| 3000K | 425\|>90 | 5 |







## ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim | 45,55 | 90226201 |
| 10W DALI* | 89,05 | 90246403 |

*revision opening required
more options and specs on page 895

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-rony-point

LAMP-CONCEPT.CH

back



# RONY petit

*Ceiling* recessed








## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs 68-70 51 4-24

| | CHF | CODE |
|---|---|---|
| | 118,70 | 110361W_ |
| | 118,70 | 110361B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 650 | >90 | 3 |
| 3000K | 685 | >90 | 5 |
| 2000K-3000K \| 16V | 495 | >90 | 9 |







## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896

**LOXONE VERSIONS ONLINE**
weverducre.com/more-rony-petit

LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | STUDIO BINNEN** THE NETHERLANDS

# RONY ADJUST petit

*Ceiling* recessed










## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|355° M-31° L80|50K

wire springs 68-70 L63 4-22

| | CHF | CODE |
|---|---|---|
| | 133,90 | 110461W_ |
| | 133,90 | 110461Q_ |
| | 133,90 | 110461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 555 | >90 | 3 |
| 3000K | 585 | >90 | 5 |
| 2000K-3000K \| 16V | 470 | >90 | 9 |







## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 10W dim | 49,00 | 90223406 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-rony-adjust-petit



**PRIVATE RESIDENCE | CANDICE BRUNY** FRANCE

# RONY ADJUST

*Ceiling* recessed











## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 102-104 90 4-25

| | CHF | CODE |
|---|---|---|
| | 183,55 | 110261W_ |
| | 183,55 | 110261B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 635/860 | >90 | 3 |
| 3000K | 675/905 | >90 | 5 |
| 2000-3000K | 475/700 | >90 | 9 |

LED module 20 years replaceability

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 102-104 110 4-25

| | CHF | CODE |
|---|---|---|
| | 109,05 | 110120W0 |
| | 109,05 | 110120B0 |

## ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W | 35,20 | 90214406 |
| 10W dim | 51,75 | 90224403 |
| 15W DALI | 89,05 | 90244501 |

more options and specs on page 898

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-rony-adjust



**PRIVATE RESIDENCE | INTERIOR STUDIO VAN MAANEN** THE NETHERLANDS

# CENO

*Ceiling* recessed

181
321
585













## 1.0 SEMI RECESSED

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 197,35 | 176561W_ |
| | 197,35 | 176561B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 500 | >90 | 3 |
| 3000K | 530 | >90 | 5 |

## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

wire springs 45-47 75 4-26

| | CHF | CODE |
|---|---|---|
| | 186,30 | 176161W_ |
| | 186,30 | 176161G_ |
| | 186,30 | 176161Q_ |
| | 186,30 | 176161K_ |
| | 186,30 | 176161CH_ |
| | 186,30 | 176161B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 500 | >90 | 3 |
| 3000K | 530 | >90 | 5 |
| 2000-3000K \| 16V | 345 | >90 | 9 |







## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim | 46,25 | 90223301 |
| 14W DALI | 89,05 | 90243502 |

revision opening required
more options and specs on page 896

## ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896

**MORE VERSIONS ONLINE**
weverducre.com/more-ceno



**OFFICE BOES & VERRUE | ARCHITECT DEWITTE** KORTRIJK | BELGIUM

# CENO

*Ceiling* recessed



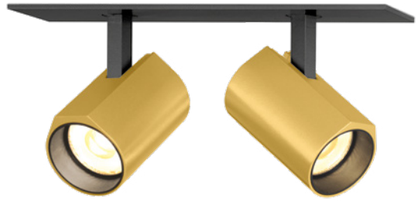



















## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

**LOXONE VERSIONS ONLINE**

weverducre.com/more-ceno-recessed

## 1.1

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

blade springs 32x66 75 min. 4

| | CHF | CODE |
|---|---|---|
| | 186,30 | 176461W_ |
| | 186,30 | 176461Q_ |
| | 186,30 | 176461K_ |
| | 186,30 | 176461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 500 | >90 | 3 |
| 3000K | 530 | >90 | 5 |

### ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim | 46,25 | 90223301 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896

## 2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

blade springs 32x145 60 min. 4

| | CHF | CODE |
|---|---|---|
| | 259,45 | 176261W_ |
| | 259,45 | 176261Q_ |
| | 259,45 | 176261K_ |
| | 259,45 | 176261B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x500 | >90 | 3 |
| 3000K | 2x530 | >90 | 5 |

### ALWAYS USE

driver | 700mA | only 1x needed

| | CHF | CODE |
|---|---|---|
| 14W dim | 53,85 | 90225502 |
| 28W DALI | 92,50 | 90245704 |

more options and specs on page 900

## 3.0

3x LED COB 6W | 700mA | 26V
aluminium

IP20 0°-90°|350° M-31° L70|55K

blade springs 32x221 60 min. 4

| | CHF | CODE |
|---|---|---|
| | 328,45 | 176361W_ |
| | 328,45 | 176361Q_ |
| | 328,45 | 176361K_ |
| | 328,45 | 176361B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3x500 | >90 | 3 |
| 3000K | 3x530 | >90 | 5 |

### ALWAYS USE

driver | 700mA | only 1x needed

| | CHF | CODE |
|---|---|---|
| 20W dim | 62,80 | 90225604 |
| 28W DALI | 92,50 | 90245704 |

more options and specs on page 900

181
321
585



reddot winner 2024

# LECA

*Ceiling* recessed










## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L80|50K

wire springs 40-41 75 4-26

2700K | CRI >90 | 585lm

| | CHF | CODE |
|---|---|---|
| | 196,00 | 188161W3 |
| | 196,00 | 188161Q3 |
| | 196,00 | 188161B3 |

IC rated

honeycomb

## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 7W dim | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896

**LOXONE VERSIONS ONLINE**
weverducre.com/more-leca

LAMP-CONCEPT.CH

back



189
325
569

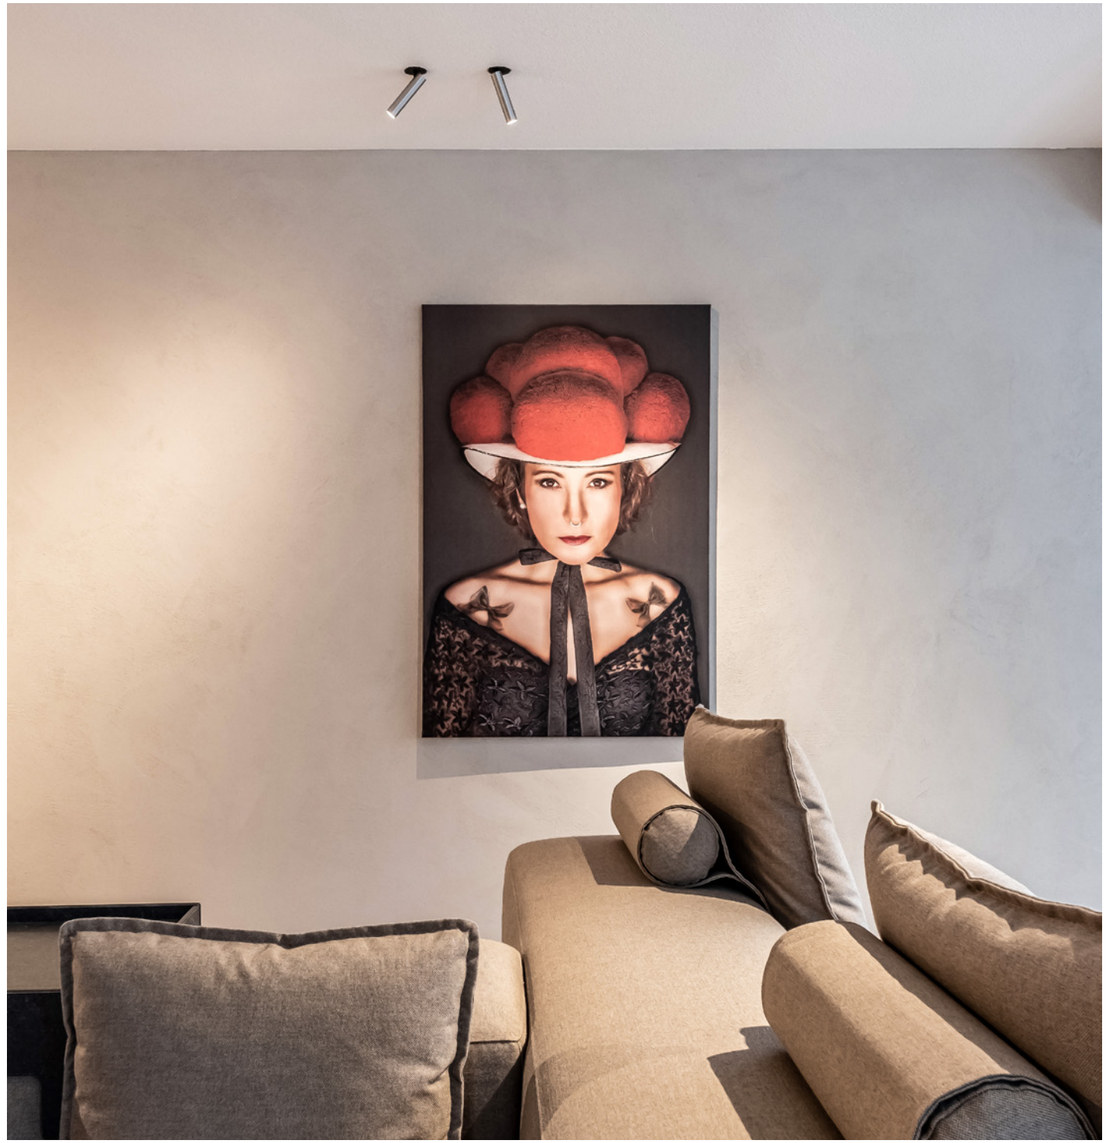

**WALDBLICK WELLNESS | EW STUDIO** FREUDENSTADT | GERMANY

DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023

# MATCH

*Ceiling* recessed









## 1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

45-47 67 4-26

| | CHF | CODE |
|---|---|---|
| | 228,00 | 190851W_ |
| | 239,05 | 190851BL_ |
| | 239,05 | 190851Q_ |
| | 228,00 | 190851B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 525 | >90 | 3 |
| 3000K | 555 | >90 | 5 |

## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-30° L80|50K

wire springs 45-47 75 4-26

| | CHF | CODE |
|---|---|---|
| | 184,95 | 190151W_ |
| | 196,00 | 190151BL_ |
| | 196,00 | 190151Q_ |
| | 184,95 | 190151B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 525 | >90 | 3 |
| 3000K | 555 | >90 | 5 |







## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim | 46,25 | 90223301 |
| 14W DALI | 89,05 | 90243502 |

revision opening required
more options and specs on page 896

## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-match-recessed

193
329 | 347
415 | 509
571
589 | 685
723 | 729





**THINKING MU STORE BARCELONA | ISERN SERRA** BARCELONA | SPAIN

LAMP-CONCEPT.CH

**WEVER & DUCRÉ** 138 — 139



**PRIVATE RESIDENCE | UNIQUE RENOVATIONS** BELGIUM

reddot winner 2023

# MATCH

*Ceiling* recessed






## 2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-90°|350° M-30° L80|50K

wire springs 105x30 60 4-26

| | CHF | CODE |
|---|---|---|
| | 287,05 | 190251W_ |
| | 303,60 | 190251Q_ |
| | 287,05 | 190251B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x515 | >90 | 3 |
| 3000K | 2x545 | >90 | 5 |

60 mm
low recessed

IC rated

## ALWAYS USE

quick connect driver | 700mA
only 1x needed

| | CHF | CODE |
|---|---|---|
| 14W dim | 53,85 | 90225502 |
| 28W DALI | 92,50 | 90245704 |

more options and specs on page 900

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-match-recessed

193
329 | 347
415 | 509
571
589 | 685
723 | 729



**PRIVATE RESIDENCE | BUREAU DESTADSBADER** BELGIUM

reddot winner 2023

# MATCH SNEAK

*Ceiling* recessed











## 1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-55°|350° M-30° L80|50K

| | CHF | CODE |
|---|---|---|
| | 219,45 | 190451W_ |
| | 230,50 | 190451L_ |
| | 230,50 | 190451M_ |
| | 230,50 | 190451Q_ |
| | 230,50 | 190451GM_ |
| | 219,45 | 190451B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 535 | >90 | 3 |
| 3000K | 565 | >90 | 5 |

## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-55°|350° M-30° L80|50K

wire springs 64-68 53 4-26

| | CHF | CODE |
|---|---|---|
| | 205,65 | 190351W_ |
| | 216,70 | 190351L_ |
| | 216,70 | 190351M_ |
| | 216,70 | 190351Q_ |
| | 216,70 | 190351GM_ |
| | 205,65 | 190351B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 525 | >90 | 3 |
| 3000K | 555 | >90 | 5 |







## ALWAYS USE

alu plasterkit 78-80 45 12.5,15,20,25

| | CHF | CODE |
|---|---|---|
| | 30,40 | 90017210 |

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim | 46,25 | 90223301 |
| 14W DALI | 89,05 | 90243502 |

more options and specs on page 896

## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required and
more options and specs on page 896

**LOXONE VERSIONS ONLINE**
weverducre.com/more-match-sneak

193
329 | 347
415 | 509
571
589 | 685
723 | 729




DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023





# MATCH stick

*Ceiling* recessed







## 1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

45-47 67 4-26

| | CHF | CODE |
|---|---|---|
| | 305,00 | 190951W_ |
| | 321,85 | 190951BL_ |
| | 305,00 | 190951B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 525 | >90 | 3 |
| 3000K | 555 | >90 | 5 |

## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

40-41 67 4-26

| | CHF | CODE |
|---|---|---|
| | 262,20 | 190751W_ |
| | 273,25 | 190751BL_ |
| | 262,20 | 190751B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 525 | >90 | 3 |
| 3000K | 555 | >90 | 5 |

## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim | 46,25 | 90223301 |
| 14W DALI | 89,05 | 90243502 |

revision opening required
more options and specs on page 896

## ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 35,20 | 90213303 |
| 7W dim | 46,25 | 90223301 |
| 14W DALI | 89,05 | 90243502 |

revision opening required
more options and specs on page 896







**LOXONE VERSIONS ONLINE**
weverducre.com/more-match-stick

LAMP-CONCEPT.CH

back

193
329 | 347
415 | 509
571
589 | 685
723 | 729

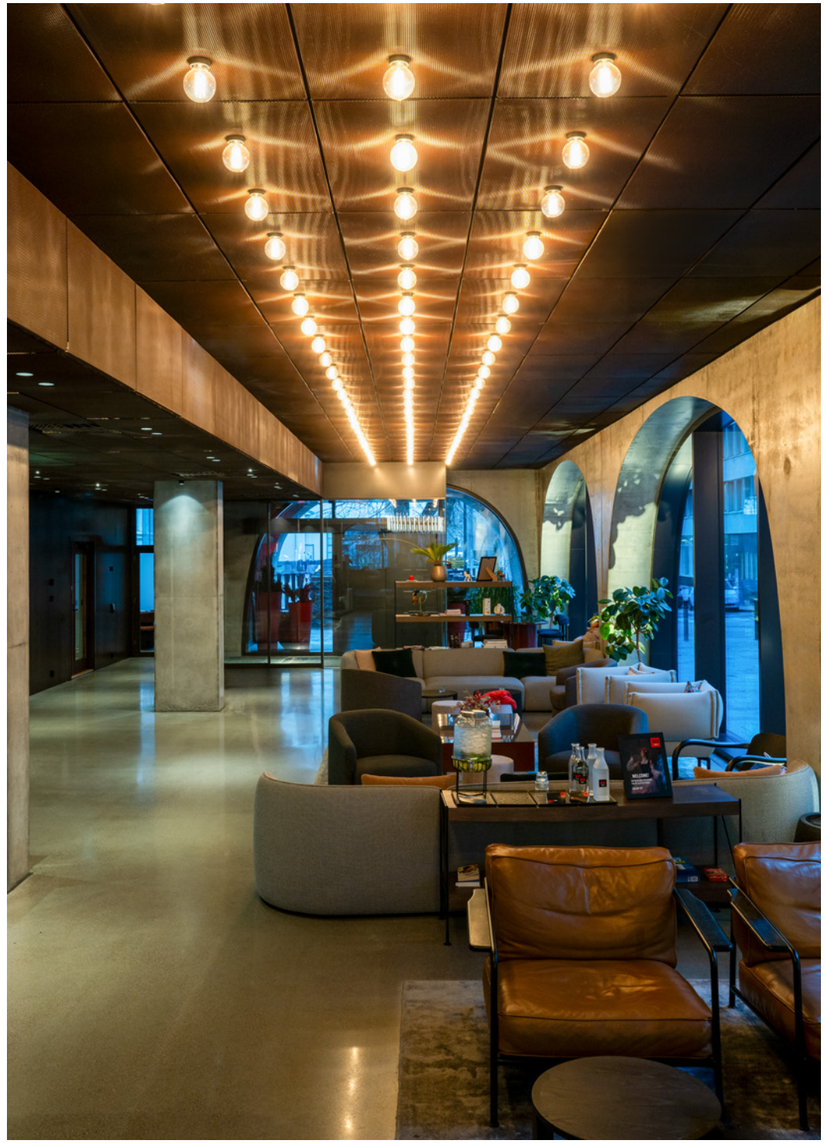

**RADISSON RED | DESIGN AGENCY FYRA** HELSINKI | FINLAND

# RUVI

*Ceiling* recessed






## 1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium

IP20

54-56 90 7-33

| | CHF | CODE |
|---|---|---|
| | 121,45 | 1671E0B0 |

## OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

G95 10W | E27 | phase-cut dim
ceramic soft look

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

G95 5.4W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 380lm | 45,55 | 9003E111 |

# splash

THEY'RE FUN TO BATHE WITH

IP44-Leuchten sind optimal vor Spritzwasser geschützt, IP65 sogar vor Wasserstrahlen – perfekt für Bad, Dusche oder SPA. Für wenig Platz eignen sich flache Modelle, die auch in niedrigen Räumen glänzen. Übrigens: Beide Schutzarten gibt es nicht nur als Spots, sondern in vielen weiteren Ausführungen.

Les luminaires IP44 sont parfaitement protégés contre les éclaboussures, les IP65 même contre les jets d'eau – idéals pour salles de bain, douches ou espaces bien-être. Les modèles plats conviennent aux petits espaces et plafonds bas. Les deux protections existent d'ailleurs en de nombreux formats, pas seulement en spots.

weverducre.com/ip44


| | | | |
|---|---|---|---|
| PLANO IP44 | p. 151 | MIRBI IP44 | p. 297 |
| MATCH point IP44 | p. 153 | TAIO IP65 | p. 299 |
| DEEP point IP44 | p. 155 | ROB IP44 | p. 301 |
| DEEP bijou IP65 | p. 157 | ROBY IP44 | p. 303 |
| DEEP petit IP65 | p. 159 | TOWNA IP44 | p. 305 |
| DEEP IP65 \| IP44 | p. 161 | ROSS IP65 | p. 307 |
| DEEPER IP44 | p. 163 | HAJO IP44 | p. 697 |
| TAIO IP65 | p. 165 | PERLEZ IP44 | p. 701 |
| RINI SNEAK IP44 | p. 167 | PERLEZ CLIP IP44 | p. 703 |
| PERLEZ IP44 | p. 169 | MIRBA IP44 | p. 705 |
| MIRBI IP44 | p. 171 | MIRBI LONG IP44 | p. 707 |
| CITY IP44 | p. 173 | RIBELLE IP65 | p. 709 |
| PERLEZ IP44 | p. 295 | PAVIO IP65 | p. 711 |


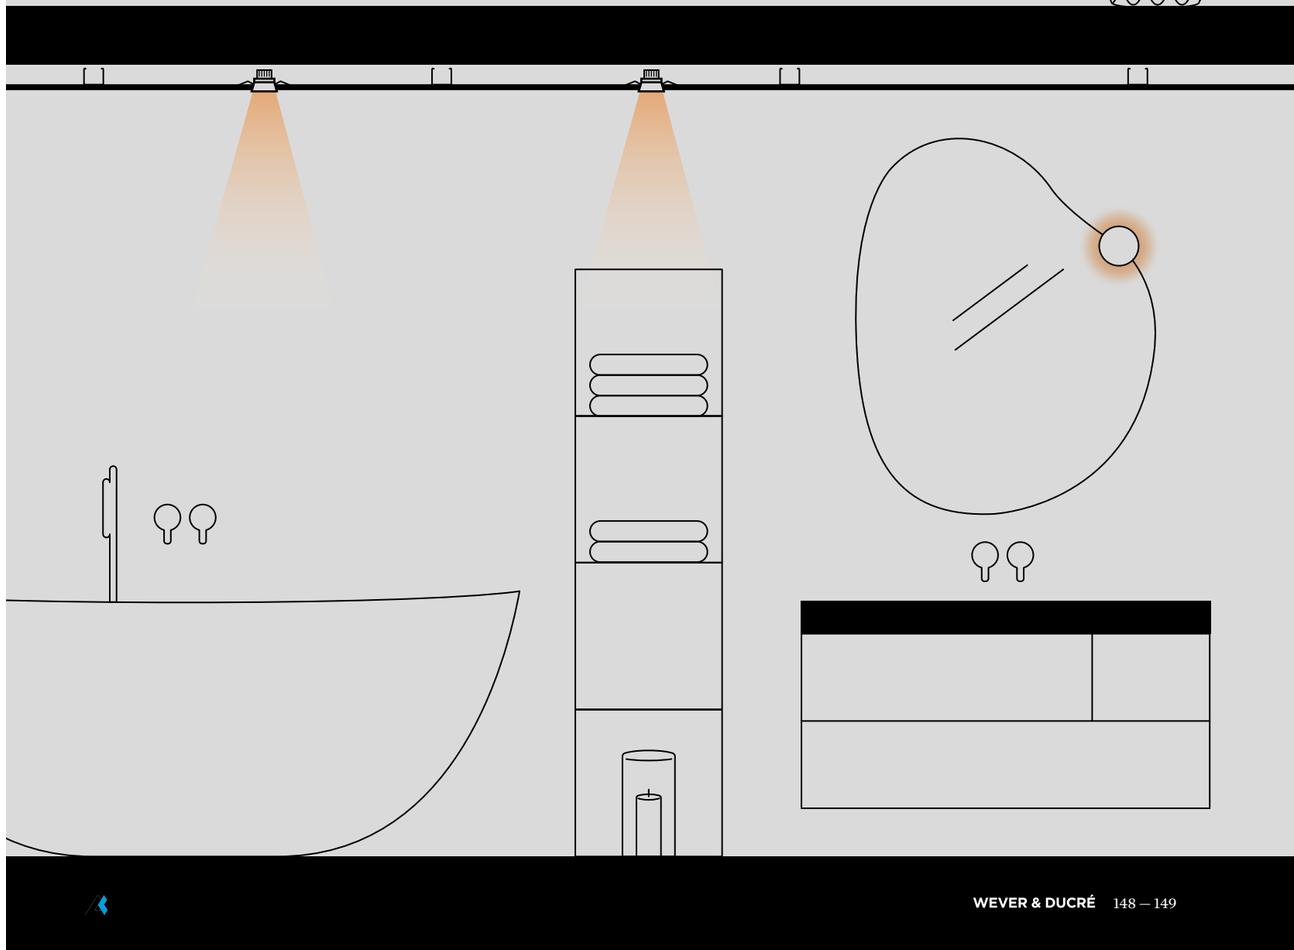



**PRIVATE RESIDENCE | STUDIO BENOIT** BELGIUM

# PLANO IP44

*Ceiling* recessed













## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80|55K

wire springs 76x78 90 4-30

| | CHF | CODE |
|---|---|---|
| | 157,35 | 118861W_ |
| | 157,35 | 118861Q_ |
| | 157,35 | 118861B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 585/785 | >90 | 3 |
| 3000K | 615/830 | >90 | 5 |
| 2000-3000K | 430/635 | >90 | 9 |

LED module 20 years replaceability

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 74x78 130 4-30

| | CHF | CODE |
|---|---|---|
| | 82,80 | 118420W0 |
| | 82,80 | 118420Q0 |
| | 82,80 | 118420B0 |

## ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W \| IP20 | 35,20 | 90214406 |
| 10W dim \| IP20 | 51,75 | 90224403 |
| 15W DALI \| IP20 | 89,05 | 90244501 |

more options and specs on page 898

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-plano-ip44

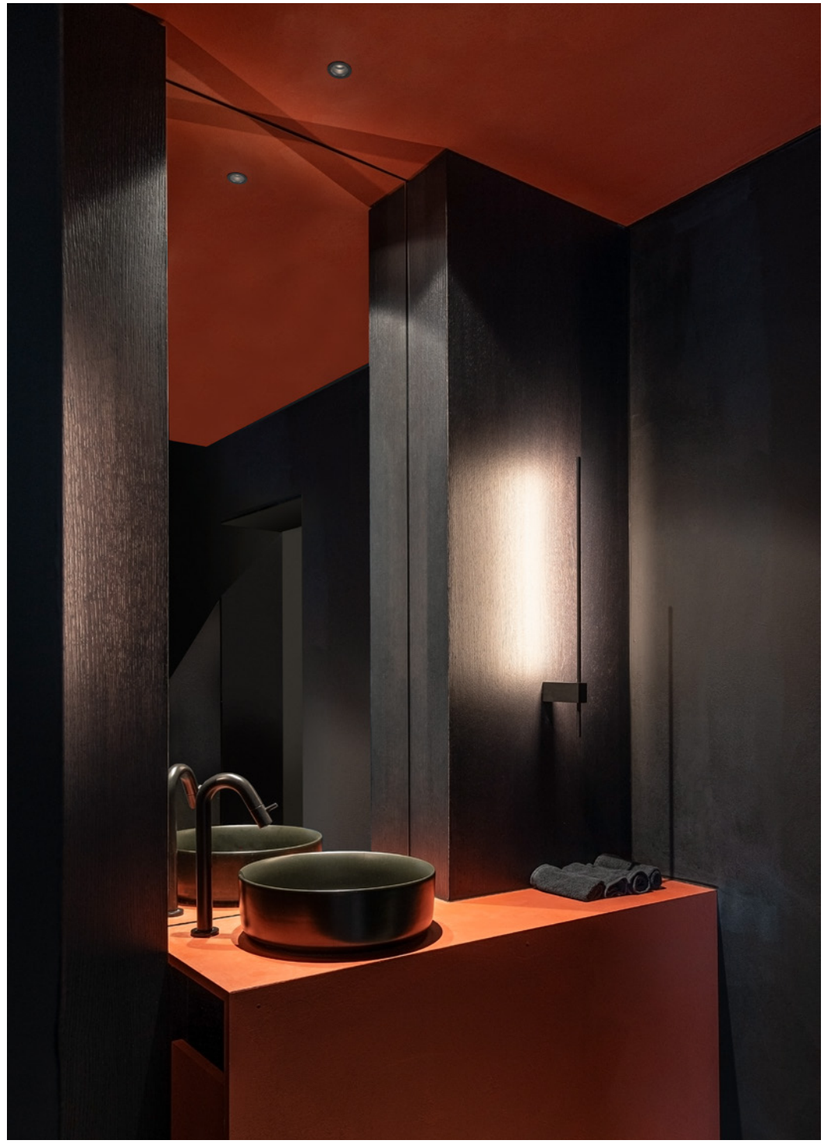

**RESTAURANT OSAR | STEENHUYSE INTERIEURARCHITECTEN** TIELT | BELGIUM

reddot winner 2023

# MATCH point IP44

*Ceiling* recessed







42

ø45

193
329 | 347
415 | 509
571
589 | 685
723 | 729

## 1.0

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

| | CHF | CODE |
|---|---|---|
| | 89,70 | 191261W_ |
| | 89,70 | 191261B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 295 | >90 | 3 |
| 3000K | 325 | >90 | 5 |

## ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim \| IP20 | 45,55 | 90226201 |
| 10W DALI \| IP20* | 89,05 | 90246403 |

*revision opening required

more options and specs on page 895

**LOXONE VERSIONS ONLINE**
weverducre.com/more-match-point



PRIVATE RESIDENCE | VLADIMIR MITROVIĆ SERBIA

# DEEP point IP44

*Ceiling* recessed










## 1.0

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 L68 4-25

| | CHF | CODE |
|---|---|---|
| | 85,60 | 185161W_ |
| | 85,60 | 185161Q_ |
| | 85,60 | 185161B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 355 | >90 | 3 |
| 3000K | 400 | >90 | 5 |

## ALWAYS USE

quick connect driver | 250mA

| | CHF | CODE |
|---|---|---|
| 5W dim \| IP20 | 45,55 | 90226201 |
| 10W DALI \| IP20* | 89,05 | 90246403 |

*revision opening required
more options and specs on page 895

**LOXONE VERSIONS ONLINE**
weverducre.com/more-deep-point

IC rated

LAMP-CONCEPT.CH

back



**HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS** BILZEN | BELGIUM

# DEEP bijou IP65

*Ceiling* recessed






## 1.0

LED COB 4W | 500mA | 8V
aluminium

IP65 M-30° L80|55K

wire springs 50-52 85 4-25

| | CHF | CODE |
|---|---|---|
| | 95,95 | 165361W_ |
| | 95,95 | 165361Q_ |
| | 95,95 | 165361B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 470 | >90 | 3 |
| 3000K | 495 | >90 | 5 |

## ALWAYS USE

driver | 500mA

| | CHF | CODE |
|---|---|---|
| 6W \| IP20 | 45,55 | 90214201 |
| 6.5W dim \| IP20* | 35,20 | 90224301 |
| 7W \| IP67 | 64,20 | 90214301 |

*revision opening required
more drivers on page 898

**MORE VERSIONS ONLINE**
weverducre.com/more-deep-bijou-ip65

IC rated



# DEEP petit IP65

*Ceiling* recessed










## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs 68-70 60 4-25

| | CHF | CODE |
|---|---|---|
| | 132,50 | 153761W_ |
| | 132,50 | 153761Q_ |
| | 132,50 | 153761B_ |

| LIGHT COLOUR | LUMEN\|CRI | CODE |
|---|---|---|
| 2700K | 590\|>90 | 3 |
| 3000K | 615\|>90 | 5 |







## ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W \| IP20 | 35,20 | 90213303 |
| 10W dim \| IP20* | 49,00 | 90223406 |
| 17W \| IP68* | 95,25 | 90213602 |

*revision opening required
more options and specs on page 896





**LINK LAB CREATIVE OFFICES | STAY STUDIO** KORTRIJK | BELGIUM

# DEEP IP65 | IP44

*Ceiling* recessed









## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP65 M-33° L80|5K

wire springs 86-89 85 4-27

| | CHF | CODE |
|---|---|---|
| | 150,45 | 184161W_ |
| | 150,45 | 184161Q_ |
| | 150,45 | 184161B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 480/660 | >90 | 3 |
| 3000K | 510/695 | >90 | 5 |

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 86-89 125 4-25

| | CHF | CODE |
|---|---|---|
| | 81,45 | 112620W0 |
| | 81,45 | 112620Q0 |
| | 81,45 | 112620B0 |

## ALWAYS USE

driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W \| IP20 | 35,20 | 90214406 |
| 10W dim \| IP20 | 51,75 | 90224403 |
| 24W \| IP68 | 102,15 | 90214702 |

more options and specs on page 898

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-deep-ip44-65

1.0 LED
IC rated



**HOTEL NOBIS | WINGÅRDHS** COPENHAGEN | DENMARK

# DEEPER IP44

*Ceiling* recessed









## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80|55K

wire springs 76-79 95 4-38

| | CHF | CODE |
|---|---|---|
| | 164,25 | 152461W_ |
| | 164,25 | 152461Q_ |
| | 164,25 | 152461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 590/790 | >90 | 3 |
| 3000K | 620/835 | >90 | 5 |
| 2000-3000K | 440/650 | >90 | 9 |

LED module 20 years replaceability

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 76-79 130 4-38

| | CHF | CODE |
|---|---|---|
| | 89,70 | 152220W0 |
| | 89,70 | 152220Q0 |
| | 89,70 | 152220B0 |

## ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W \| IP20 | 35,20 | 90214406 |
| 10W dim \| IP20 | 51,75 | 90224403 |
| 15W DALI \| IP20 | 89,05 | 90244501 |

more options and specs on page 898

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**LOXONE VERSIONS ONLINE**
weverducre.com/more-deeper

LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | JOLIJN GEERAERTS INTERIEURARCHITECT** BELGIUM









# TAIO IP65

*Ceiling* recessed




## 1.0

LED COB 6/9W | 350/500mA | 17V
aluminium | opal glass convex lens

IP65 W-105° L80|55K

wire springs 70 80 4-27

| | CHF | CODE |
|---|---|---|
| | 131,10 | 180781W_ |
| | 131,10 | 180781G_ |
| | 131,10 | 180781Q_ |
| | 131,10 | 180781B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 375/515 | >90 | 3 |
| 3000K | 390/535 | >90 | 5 |

## ALWAYS USE

driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W \| IP20 | 35,20 | 90214406 |
| 10W dim \| IP20 | 51,75 | 90224403 |
| 24W \| IP68 | 102,15 | 90214702 |

more options and specs on page 898




299
747
757
803



**PRIVATE RESIDENCE | AJ ARCHITECTEN** BELGIUM

# RINI SNEAK IP44

*Ceiling* recessed











## 1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80|55K

wire springs 76-79 52 4-25

| | CHF | CODE |
|---|---|---|
| | 137,35 | 154461W_ |
| | 137,35 | 154461B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 605/815 | >90 | 3 |
| 3000K | 640/860 | >90 | 5 |
| 2000-3000K | 450/665 | >90 | 9 |

LED module 20 years replaceability

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 76-79 85 4-25

| | CHF | CODE |
|---|---|---|
| | 62,80 | 154220W0 |
| | 62,80 | 154220B0 |

## ALWAYS USE

quick connect driver | 500mA

| | CHF | CODE |
|---|---|---|
| 10W \| IP20 | 35,20 | 90214406 |
| 10W dim \| IP20 | 51,75 | 90224403 |
| 15W DALI \| IP20 | 89,05 | 90244501 |

more options and specs on page 898

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**LOXONE VERSIONS ONLINE**
weverducre.com/more-rini-sneak





# PERLEZ IP44

*Ceiling* recessed

271 | 275 | 295

701






## 1.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 L80|50K

wire springs 46-51 68 4-25

| | CHF | CODE |
|---|---|---|
| | 204,25 | 192181W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 520/705 | >95 | 3 |
| 3000K | 550/740 | >95 | 5 |

### ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W \| IP20 | 35,20 | 90213303 |
| 7W dim \| IP20 | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896




## 2.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 L80|50K

wire springs 46-51 68 4-25

| | CHF | CODE |
|---|---|---|
| | 218,05 | 192281W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 600/810 | >95 | 3 |
| 3000K | 630/850 | >95 | 5 |

### ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W \| IP20 | 35,20 | 90213303 |
| 7W dim \| IP20 | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896




## 3.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 L80|50K

wire springs 46-51 68 4-25

| | CHF | CODE |
|---|---|---|
| | 245,65 | 192381W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 645/875 | >95 | 3 |
| 3000K | 665/915 | >95 | 5 |

### ALWAYS USE

quick connect driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W \| IP20 | 35,20 | 90213303 |
| 7W dim \| IP20 | 46,25 | 90223301 |
| 14W DALI* | 89,05 | 90243502 |

*revision opening required
more options and specs on page 896

IC rated

**LOXONE VERSIONS ONLINE**
weverducre.com/more-perlez-recessed



# MIRBI IP44

*Ceiling* recessed







297



707













## 1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 L80|60K

blade springs 76-79 50 min. 8

3000K | CRI >90 | 640lm

| | CHF | CODE |
|---|---|---|
| | 213,90 | 175688W5 |

## 2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 L80|60K

blade springs 72x72 50 min. 8

3000K | CRI >90 | 640lm

| | CHF | CODE |
|---|---|---|
| | 213,90 | 175788W5 |



**DENTAL PRACTICE TANDKORAAL | G4A ARCHITECTEN** BRUGGE | BELGIUM

# CITY IP44

*Ceiling* recessed






ø210




ø305

## 1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

wire springs 202-205 50 4-22

3000K | CRI >90 | 1170lm

| | CHF | CODE |
|---|---|---|
| | 229,10 | 115488W5 |
| | 229,10 | 115488B5 |

## 2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

wire springs 297-300 50 4-22

3000K | CRI >90 | 1740lm

| | CHF | CODE |
|---|---|---|
| | 357,45 | 115588W5 |
| | 357,45 | 115588B5 |



# *Ceiling* surface



## SPOT LIGHTS



QITO
177



BLIEK PETIT
179



CENO
181



LECA
189



MATCH
193



MATCH 4.0
197



MICK
199



PILLO
201



SARA ON BASE
203



SQUBE ON BASE
205

## DOWN LIGHTS



LINOO
211



PIRRO PETIT
213



PIRRO
215



PIRRO OPAL
221



PIRRO ON BASE
223



PLANO PETIT
227



SIRRO
229



BOX MINI LED
231



BOX MINI PAR16
233



BOX
235



DOCUS MINI
239



DOCUS
241



HEXO MINI
243



HEXO
245



RAY MINI LED
247



RAY MINI PAR16
249



RAY
251



SOLID BIJOU
253



SOLID PETIT
255



SOLID
257



TRACE
261

## LUMINAIRES



FINLIN
263



FIL SPIN
267



TRACE SPIN
269



PERLEZ SPIN
271



TRACE GRID
273



PERLEZ GRID
275



VENN
277



DRO
279



MIRRO
283



MIRRO SOFT
285



CLEA
287



J.J.W.
289



WIRO
291



ROOMOR OFFICE
293

## IP-RATED



PERLEZ IP44
295



MIRBI IP44 1.0
297



MIRBI IP44 2.0
297



TAIO IP65
299



ROB IP44
301



ROBY IP44
303



TOWNA IP44
305



ROSS IP54
307




# QITO

*Ceiling* surface












## 2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-35°|350° M-31° L80|50K

| | CHF | CODE |
|---|---|---|
| | 328,45 | 198664W_ |
| | 378,15 | 198664L_ |
| | 378,15 | 198664Q_ |
| | 328,45 | 198664B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x420 | >90 | 3 |
| 3000K | 2x440 | >90 | 5 |




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |



reddot winner 2023

# BLIEK petit

*Ceiling* surface



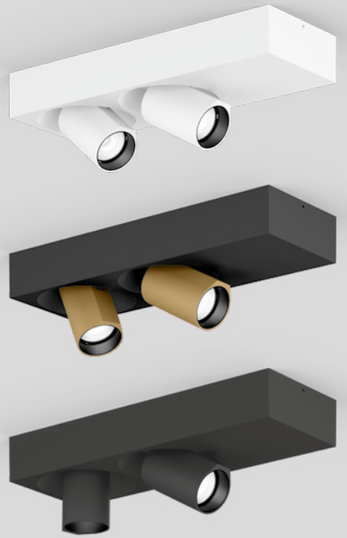




## 2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-60°|355° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 383,65 | 164664W_ |
| | 383,65 | 164664CH_ |
| | 383,65 | 164664B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x490 | >90 | 3 |
| 3000K | 2x510 | >90 | 5 |
| 2000-3000K | 2x340 | >90 | 9 |




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |



**PRIVATE RESIDENCE | VERFAILLIE INTERIEUR** BELGIUM

# CENO

*Ceiling* surface











## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 231,85 | 176664W_ |
| | 231,85 | 176664Q_ |
| | 231,85 | 176664K_ |
| | 231,85 | 176664B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 520 | >90 | 3 |
| 3000K | 540 | >90 | 5 |

## 2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 371,25 | 176764W_ |
| | 371,25 | 176764Q_ |
| | 371,25 | 176764K_ |
| | 371,25 | 176764B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x480 | >90 | 3 |
| 3000K | 2x525 | >90 | 5 |




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-ceno-surface


MARRAKECH FLAIR



# CENO

*Ceiling* surface













## 4.0

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 604,45 | 176864W_ |
| | 604,45 | 176864Q_ |
| | 604,45 | 176864K_ |
| | 604,45 | 176864B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x510 | >90 | 3 |
| 3000K | 4x530 | >90 | 5 |

## 4.1

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 572,70 | 176964W_ |
| | 572,70 | 176964Q_ |
| | 572,70 | 176964K_ |
| | 572,70 | 176964B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x510 | >90 | 3 |
| 3000K | 4x530 | >90 | 5 |




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |



PRIVATE RESIDENCE | STEENOVEN | B2A | BELGIUM

# CENO

*Ceiling* surface






## 6.0

LED COB 41W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

honeycomb

| | CHF | CODE |
|---|---|---|
| | 793,50 | 176064W_ |
| | 793,50 | 176064Q_ |
| | 793,50 | 176064B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 6x480 | >90 | 3 |
| 3000K | 6x525 | >90 | 5 |

## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |



reddot winner 2024

# LECA

*Ceiling* surface



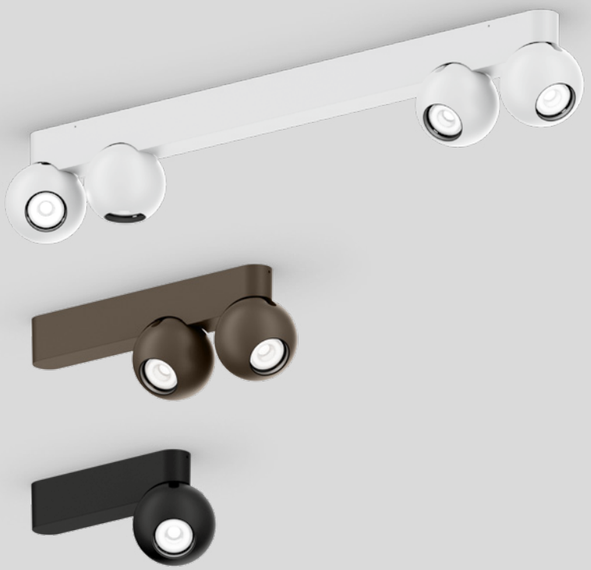













## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

## 1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L80|50K

2700K | CRI >90 | 585lm

| | CHF | CODE |
|---|---|---|
| | 247,05 | 188264W3 |
| | 247,05 | 188264Q3 |
| | 247,05 | 188264B3 |

## 2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L80|50K

2700K | CRI >90 | 2x585lm

| | CHF | CODE |
|---|---|---|
| | 398,85 | 188364W3 |
| | 398,85 | 188364Q3 |
| | 398,85 | 188364B3 |

## 4.0

LED COB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L80|50K

2700K | CRI >90 | 4x585lm

| | CHF | CODE |
|---|---|---|
| | 641,70 | 188464W3 |
| | 641,70 | 188464B3 |





**PRIVATE RESIDENCE | AJ ARCHITECTEN** BELGIUM

# MATCH

*Ceiling* surface 61 | 137 | 153

329 | 347
415 | 509
571
589 | 685
723 | 729













## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-30°L80|50K

| | CHF | CODE |
|---|---|---|
| | 241,50 | 177154W_ |
| | 247,05 | 177154BL_ |
| | 241,50 | 177154B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 550 | >90 | 3 |
| 3000K | 580 | >90 | 5 |

## 2.0

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-30° L80|50K

| | CHF | CODE |
|---|---|---|
| | 393,30 | 177254W_ |
| | 407,10 | 177254BL_ |
| | 393,30 | 177254B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x545 | >90 | 3 |
| 3000K | 2x550 | >90 | 5 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-match-surface







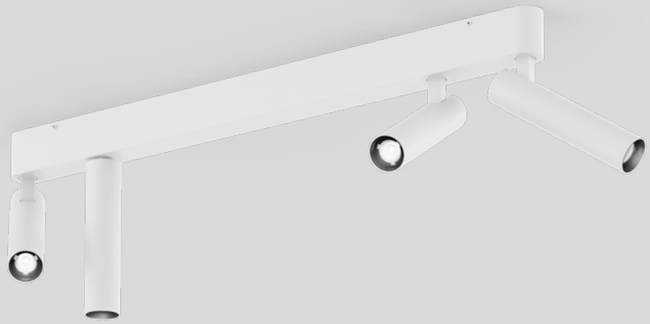

# MATCH

*Ceiling* surface 61 | 137 | 153

329 | 347

415 | 509

571

589 | 685

723 | 729




## 4.0

LED COB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-30° L80|50K

| | CHF | CODE |
|---|---|---|
| | 627.90 | 177454W_ |
| | 627.90 | 177454B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x490 | >90 | 3 |
| 3000K | 4x495 | >90 | 5 |

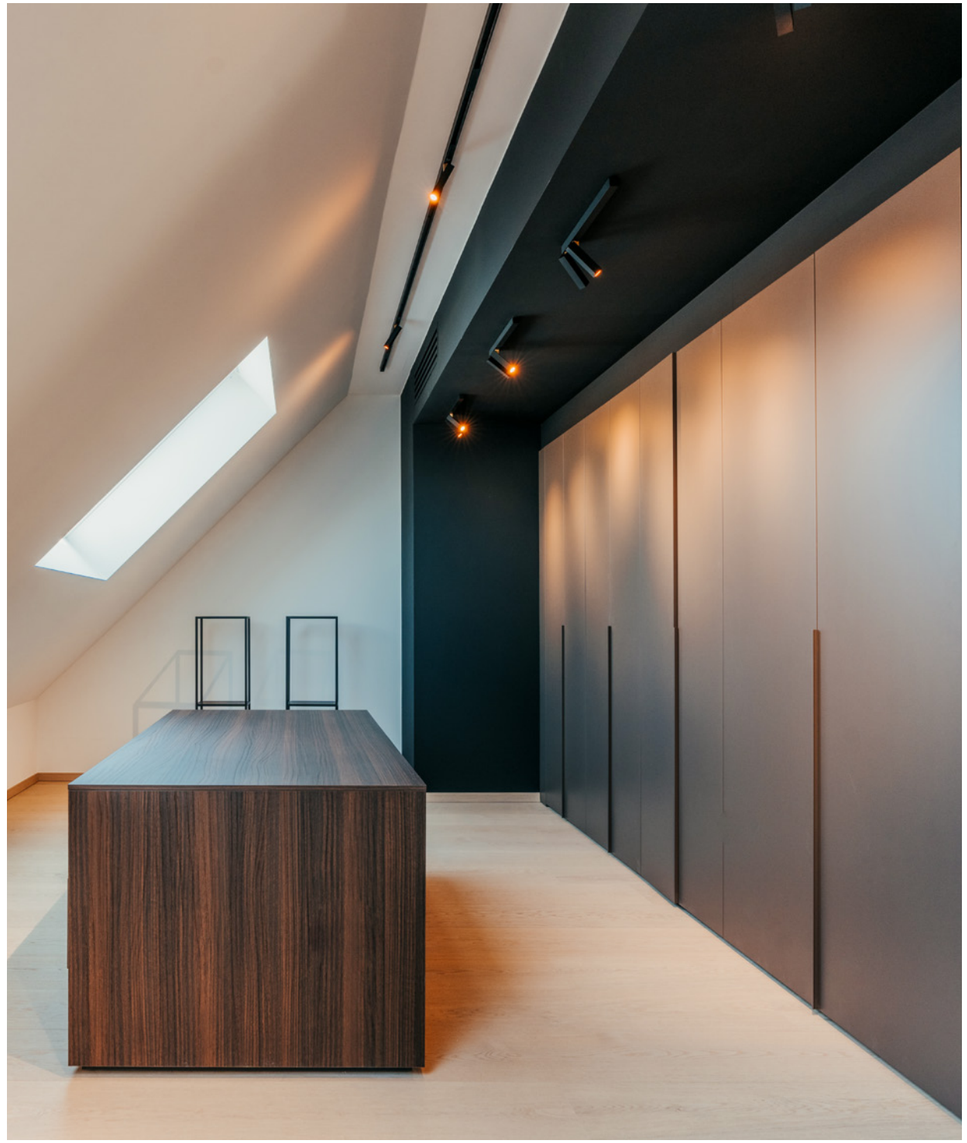

**PRIVATE RESIDENCE | AXIOME ARCHITECTURE** BELGIUM

# MICK

*Ceiling* surface

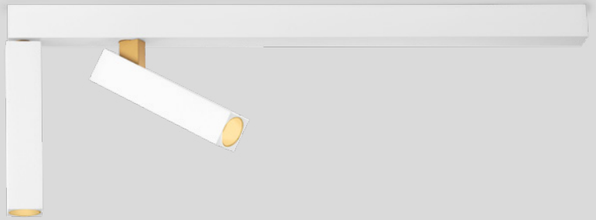

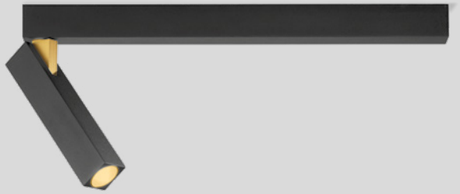







## 1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

| | CHF | CODE |
|---|---|---|
| | 365,70 | 159144J_ |
| | 365,70 | 159144K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 410 | >90 | 3 |
| 3000K | 435 | >90 | 5 |

## 2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

| | CHF | CODE |
|---|---|---|
| | 476,10 | 159244J_ |
| | 476,10 | 159244K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x215 | >90 | 3 |
| 3000K | 2x225 | >90 | 5 |

333

687 | 691



# PILLO

*Ceiling* surface











## 1.0

PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|350°

| | CHF | CODE |
|---|---|---|
| | 89,70 | 194120W0 |
| | 89,70 | 194120B0 |

## 2.0

2x PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|350°

| | CHF | CODE |
|---|---|---|
| | 162,85 | 194220W0 |
| | 162,85 | 194220B0 |

## OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 225lm | 20,05 | 901128B3 |
| 3000K \| 235lm | 20,05 | 901128B5 |

## OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 225lm | 20,05 | 901128B3 |
| 3000K \| 235lm | 20,05 | 901128B5 |



**MARBELLA DESIGN & ART FAIR | MARISA GALLO | INTERIORISMO STUDIO** MARBELLA | SPAIN

# SARA on base

*Ceiling* surface



365

689










## 1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°

| | CHF | CODE |
|---|---|---|
| | 109,05 | 157220W0 |
| | 117,30 | 157220G0 |
| | 117,30 | 157220K0 |
| | 109,05 | 157220B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|330°

| | CHF | CODE |
|---|---|---|
| | 168,40 | 157420W0 |
| | 168,40 | 157420B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|330°

| | CHF | CODE |
|---|---|---|
| | 338,10 | 157520W0 |
| | 338,10 | 157520B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**PRIVATE RESIDENCE | AGENCE VERONIQUE COTREL** FRANCE

# SQUBE on base

*Ceiling* surface
















## 1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 0°-90° M-39° L70|55K

| | CHF | CODE |
|---|---|---|
| | 227,70 | 144268W_ |
| | 227,70 | 144268B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 400 | >90 | 3 |
| 3000K | 445 | >90 | 5 |
| 1800-3000K | 350 | >80 | 9 |

## 1.1 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 0°-90° M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 260,85 | 144468W_ |
| | 260,85 | 144468B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 925 | >90 | 3 |
| 3000K | 960 | >90 | 5 |
| 1800-3000K | 645 | >80 | 9 |

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°

| | CHF | CODE |
|---|---|---|
| | 132,50 | 144220W0 |
| | 132,50 | 144220B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905


black ring LED


PAR16







**PRIVATE RESIDENCE | LANCO DESIGN** BELGIUM

# SQUBE on base

*Ceiling* surface

369











## 2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|355°

| | CHF | CODE |
|---|---|---|
| | 269,10 | 144520W0 |
| | 269,10 | 144520B0 |

## 3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|355°

| | CHF | CODE |
|---|---|---|
| | 324,30 | 144620W0 |
| | 324,30 | 144620B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



# LINOO

*Ceiling* surface














## 4.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

2700K/3000K | CRI >90 | 4x125lm

| | CHF | CODE |
|---|---|---|
| | 204,25 | 109664WW9 |
| | 204,25 | 109664WB9 |
| | 204,25 | 109664QB9 |
| | 204,25 | 109664BB9 |

## 4.1

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

2700K/3000K | CRI >90 | 4x125lm

| | CHF | CODE |
|---|---|---|
| | 193,20 | 109764WW9 |
| | 193,20 | 109764WB9 |
| | 193,20 | 109764QB9 |
| | 193,20 | 109764BB9 |

## 8.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

2700K/3000K | CRI >90 | 8x125lm

| | CHF | CODE |
|---|---|---|
| | 324,30 | 109864WW9 |
| | 324,30 | 109864WB9 |
| | 324,30 | 109864QB9 |
| | 324,30 | 109864BB9 |

UGR ≤ 16
65°≤ 3000cd

2700K – 3000K
adjustment
switch



**PRIVATE RESIDENCE | IN-LIJN INTERIEURARCHITECTUUR** BELGIUM

# PIRRO petit

*Ceiling* surface



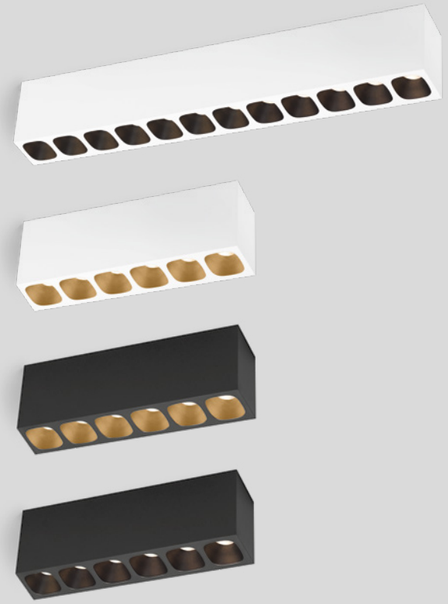







## 6.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-28° L80|50K

| | CHF | CODE |
|---|---|---|
| | 351,90 | 129854E_ |
| | 351,90 | 129854WM_ |
| | 351,90 | 129854CH_ |
| | 351,90 | 129854B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 6x160 | >90 | 3 |
| 3000K | 6x165 | >90 | 5 |

## 12.0

LED COB 27W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-28° L80|50K

| | CHF | CODE |
|---|---|---|
| | 517,50 | 129954E_ |
| | 517,50 | 129954WM_ |
| | 517,50 | 129954CH_ |
| | 517,50 | 129954B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 12x160 | >90 | 3 |
| 3000K | 12x165 | >90 | 5 |



# PIRRO

*Ceiling* surface












## 1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 204,25 | 151164E_ |
| | 204,25 | 151164J_ |
| | 204,25 | 151164K_ |
| | 204,25 | 151164B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 355 | >90 | 3 |
| 3000K | 385 | >90 | 5 |

## 4.1

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 328,45 | 151564E_ |
| | 328,45 | 151564J_ |
| | 328,45 | 151564K_ |
| | 328,45 | 151564B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x365 | >90 | 3 |
| 3000K | 4x380 | >90 | 5 |




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |



**PRIVATE RESIDENCE | PADRON LUXURY LIVING BY POTRELL** BELGIUM

# PIRRO

*Ceiling* surface



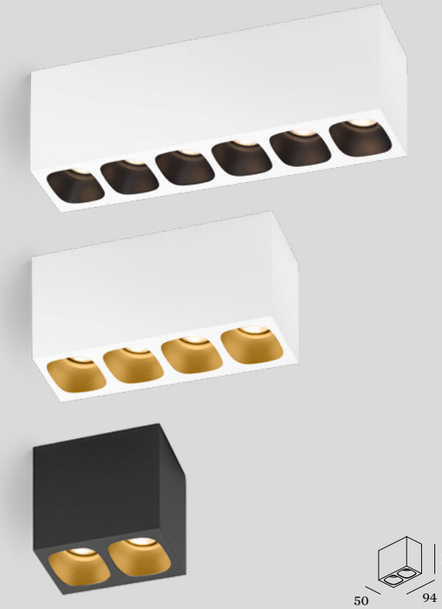










## 2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 251,20 | 151264E_ |
| | 251,20 | 151264J_ |
| | 251,20 | 151264K_ |
| | 251,20 | 151264B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x355 | >90 | 3 |
| 3000K | 2x385 | >90 | 5 |

## 4.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 334,00 | 151464E_ |
| | 334,00 | 151464J_ |
| | 334,00 | 151464K_ |
| | 334,00 | 151464B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x365 | >90 | 3 |
| 3000K | 4x380 | >90 | 5 |

## 6.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 476,10 | 151664E_ |
| | 476,10 | 151664J_ |
| | 476,10 | 151664K_ |
| | 476,10 | 151664B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 6x330 | >90 | 3 |
| 3000K | 6x350 | >90 | 5 |




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |



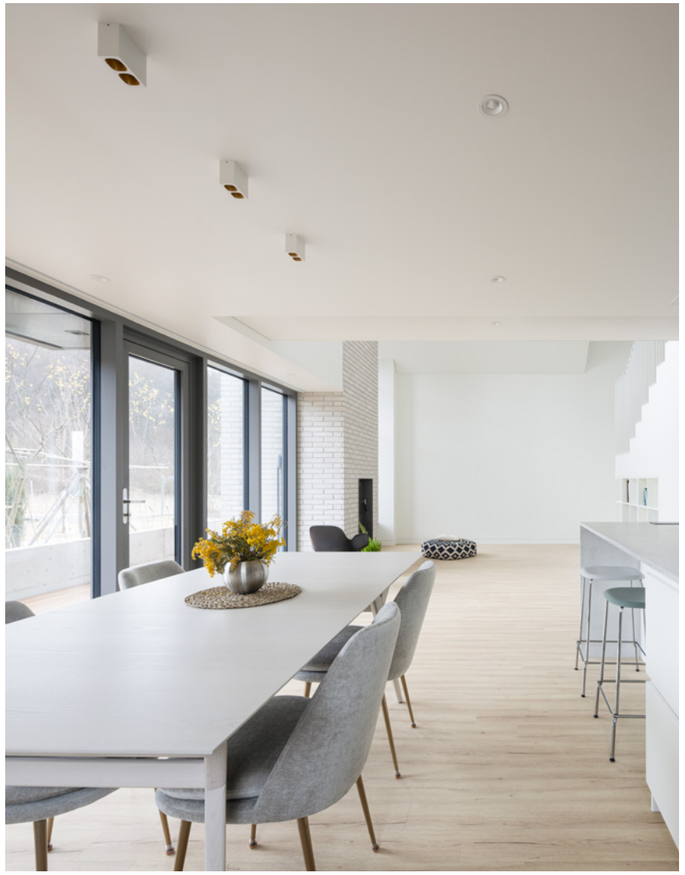



PRIVATE RESIDENCE | ORANEN & TURKLIN FINLAND

# PIRRO OPAL

*Ceiling* surface

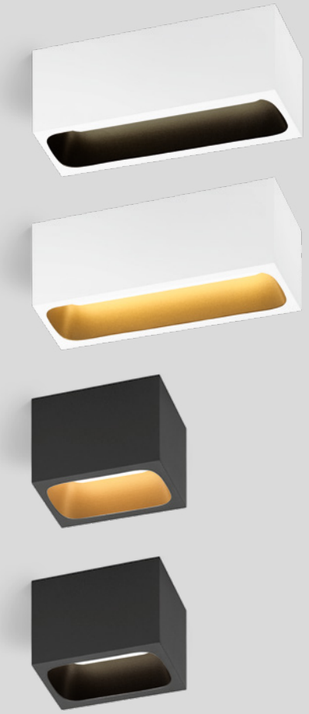







## 2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 251,20 | 151284E_ |
| | 251,20 | 151284J_ |
| | 251,20 | 151284K_ |
| | 251,20 | 151284B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 270 | >90 | 3 |
| 3000K | 280 | >90 | 5 |

## 4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 334,00 | 151484E_ |
| | 334,00 | 151484J_ |
| | 334,00 | 151484K_ |
| | 334,00 | 151484B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 685 | >90 | 3 |
| 3000K | 710 | >90 | 5 |





PRIVATE RESIDENCE | PADRON LUXURY LIVING BY POTRELL BELGIUM

# PIRRO on base

*Ceiling* surface




















## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

## 2.2

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 685,90 | 173564WWB_ |
| | 685,90 | 173564WWG_ |
| | 685,90 | 173564BBG_ |
| | 685,90 | 173564BBB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x360 | >90 | 3 |
| 3000K | 4x380 | >90 | 5 |

## 4.2

LED COB 31W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 768,70 | 173664WWB_ |
| | 768,70 | 173664WWG_ |
| | 768,70 | 173664BBG_ |
| | 768,70 | 173664BBB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 6x360 | >90 | 3 |
| 3000K | 6x380 | >90 | 5 |

## 4.4

LED COB 40W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 851,50 | 173764WWB_ |
| | 851,50 | 173764WWG_ |
| | 851,50 | 173764BBG_ |
| | 851,50 | 173764BBB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 8x360 | >90 | 3 |
| 3000K | 8x380 | >90 | 5 |



# PIRRO on base

*Ceiling* surface

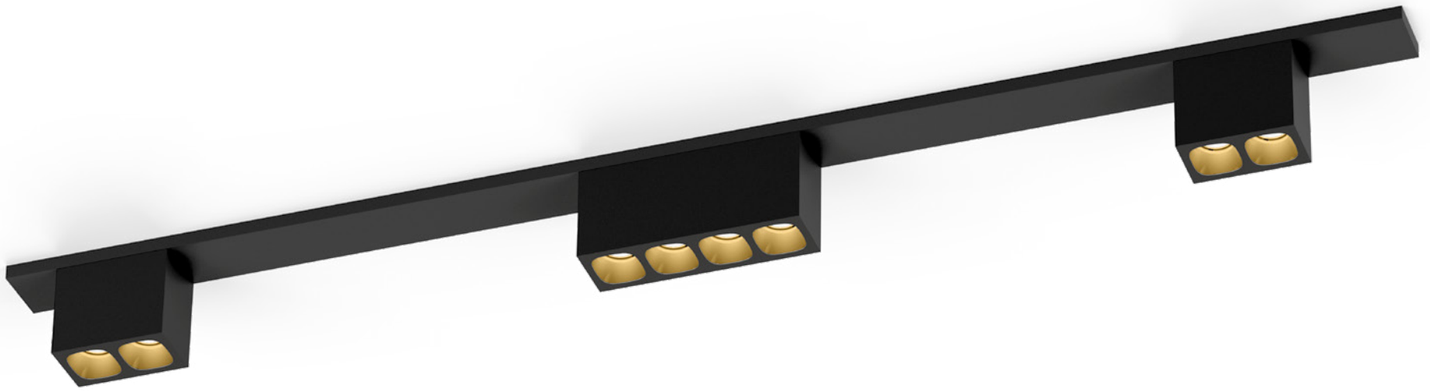













## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

## 2.4.2

LED COB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 1065,40 | 173864WWB_ |
| | 1065,40 | 173864WWG_ |
| | 1065,40 | 173864BBG_ |
| | 1065,40 | 173864BBB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 8x360 | >90 | 3 |
| 3000K | 8x380 | >90 | 5 |

## 4.2.2

LED COB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 1065,40 | 173964WWB_ |
| | 1065,40 | 173964WWG_ |
| | 1065,40 | 173964BBG_ |
| | 1065,40 | 173964BBB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 8x360 | >90 | 3 |
| 3000K | 8x380 | >90 | 5 |





# PLANO petit

*Ceiling* surface
















## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 231,85 | 162864WW_ |
| | 231,85 | 162864WB_ |
| | 231,85 | 162864BM_ |
| | 231,85 | 162864BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 550 | >90 | 3 |
| 3000K | 580 | >90 | 5 |

LED module 20 years replaceability

## 2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 351,90 | 162964WW_ |
| | 351,90 | 162964WB_ |
| | 351,90 | 162964BM_ |
| | 351,90 | 162964BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x550 | >90 | 3 |
| 3000K | 2x580 | >90 | 5 |

LED module 20 years replaceability

## 3.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L70|55K

| | CHF | CODE |
|---|---|---|
| | 448,50 | 162764WW_ |
| | 448,50 | 162764WB_ |
| | 448,50 | 162764BM_ |
| | 448,50 | 162764BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3x540 | >90 | 3 |
| 3000K | 3x570 | >90 | 5 |

LED module 20 years replaceability

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-plano-surface



DEUTSCHE WOHNWERTE | BRANDHERM + KRUMREY HAMBURG HEIDELBERG | GERMANY

# SIRRO

*Ceiling* surface














## 1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

| | CHF | CODE |
|---|---|---|
| | 241,50 | 139120W0 |
| | 241,50 | 139120E0 |
| | 241,50 | 139120B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

| | CHF | CODE |
|---|---|---|
| | 356,05 | 139220W0 |
| | 356,05 | 139220E0 |
| | 356,05 | 139220B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

| | CHF | CODE |
|---|---|---|
| | 466,45 | 139320W0 |
| | 466,45 | 139320E0 |
| | 466,45 | 139320B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

**LOXONE VERSIONS ONLINE**
weverducre.com/more-sirro

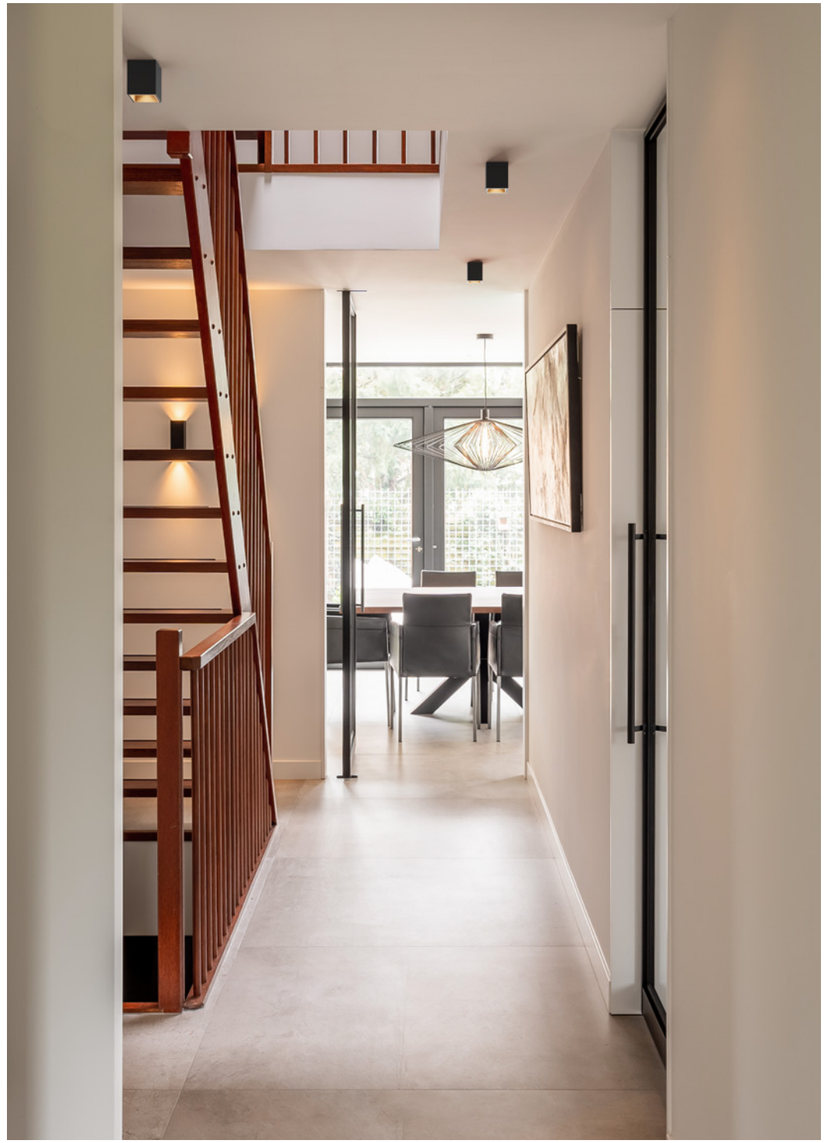

**PRIVATE RESIDENCE | JACO GOUDRIAAN** THE NETHERLANDS

# BOX mini

*Ceiling* surface










## 1.0 LED

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

IP20 M-30° L80|55K


















| | CHF | CODE |
|---|---|---|
| | 135,25 | 258154WW_ |
| | 135,25 | 258154WM_ |
| | 135,25 | 258154WB_ |
| | 136,65 | 258154MM_ |
| | 136,65 | 258154MB_ |
| | 135,25 | 258154BM_ |
| | 136,65 | 258154QQ_ |
| | 135,25 | 258154BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 470 | >90 | 3 |
| 3000K | 500 | >90 | 5 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-box-mini

LAMP-CONCEPT.CH

back



# BOX mini

*Ceiling* surface






## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 78,70 | 258120W0 |
| | 80,05 | 258120G0 |
| | 80,05 | 258120M0 |
| | 80,05 | 258120Q0 |
| | 78,70 | 258120B0 |




## OPTIONAL

inner reflector max. 10W
polycarbonate

| | CHF | CODE |
|---|---|---|
| | 13,15 | 900199W1 |
| | 13,15 | 900199G1 |
| | 13,15 | 900199M1 |
| | 13,15 | 900199Q1 |
| | 13,15 | 900199B1 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**OFFICE INNARGI COPENHAGEN | HELLE FLOU** COPENHAGEN | DENMARK

# BOX

*Ceiling* surface













## OPTIONAL

inner reflector max. 10W
polycarbonate

| | CHF | CODE |
|---|---|---|
| | 29,00 | 911211W1 |
| | 29,00 | 911211G1 |
| | 29,00 | 911211M1 |
| | 29,00 | 911211B1 |

inner cover max. 10W
aluminium

| | CHF | CODE |
|---|---|---|
| | 31,75 | 911011W1 |
| | 31,75 | 911011G1 |
| | 31,75 | 911011M1 |
| | 31,75 | 911011B1 |




## 1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

| | CHF | CODE |
|---|---|---|
| | 241,50 | 186158W_ |
| | 242,90 | 186158L_ |
| | 242,90 | 186158G_ |
| | 242,90 | 186158M_ |
| | 242,90 | 186158Q_ |
| | 241,50 | 186158B_ |

DALI

| | CHF | CODE |
|---|---|---|
| | 273,25 | 186159W_ |
| | 274,65 | 186159L_ |
| | 274,65 | 186159G_ |
| | 274,65 | 186159M_ |
| | 274,65 | 186159Q_ |
| | 273,25 | 186159B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 600 | >90 | 3 |
| 3000K | 620 | >90 | 5 |
| 2000-3000K* | 415 | >90 | 9 |

*only for phase-cut dim




## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 93,85 | 146120W0 |
| | 95,25 | 146120L0 |
| | 95,25 | 146120G0 |
| | 95,25 | 146120M0 |
| | 95,25 | 146120Q0 |
| | 93,85 | 146120B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

335
607
765
815



**PRIVATE RESIDENCE | DECOFORM** BELGIUM

# BOX

*Ceiling* surface

















## 2.0 LED

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

| | CHF | CODE |
|---|---|---|
| | 383,65 | 186258W_ |
| | 387,80 | 186258L_ |
| | 387,80 | 186258G_ |
| | 387,80 | 186258M_ |
| | 387,80 | 186258Q_ |
| | 383,65 | 186258B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x600 | >90 | 3 |
| 3000K | 2x620 | >90 | 5 |
| 2000-3000K | 2x415 | >90 | 9 |

## 2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 186,30 | 146220W0 |
| | 190,45 | 146220L0 |
| | 190,45 | 146220G0 |
| | 190,45 | 146220M0 |
| | 190,45 | 146220Q0 |
| | 186,30 | 146220B0 |

## OPTIONAL

double inner reflector max. 10W
polycarbonate

| | CHF | CODE |
|---|---|---|
| | 37,30 | 911251W1 |
| | 37,30 | 911251G1 |
| | 37,30 | 911251M1 |
| | 37,30 | 911251B1 |

inner cover max. 10W
aluminium | 2 pieces needed

| | CHF | CODE |
|---|---|---|
| | 31,75 | 911011W1 |
| | 31,75 | 911011G1 |
| | 31,75 | 911011M1 |
| | 31,75 | 911011B1 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**OFFICE INARTO | INARTO ARCHITECTEN** HERENTALS | BELGIUM

# DOCUS mini

*Ceiling* surface

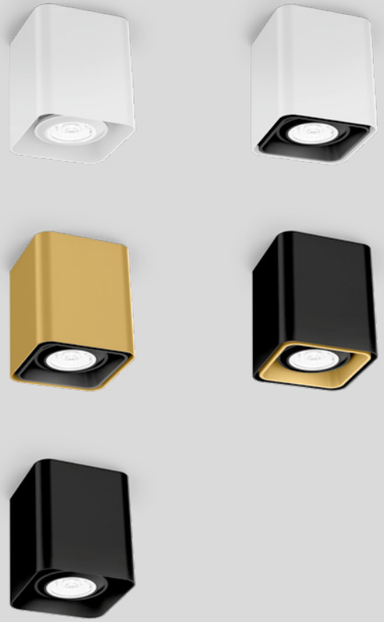




## 1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 88,35 | 258320W0 |
| | 89,70 | 258320G0 |
| | 88,35 | 258320B0 |




## OPTIONAL

inner reflector max. 10W
polycarbonate

| | CHF | CODE |
|---|---|---|
| | 13,15 | 900199W2 |
| | 13,15 | 900199G2 |
| | 13,15 | 900199B2 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

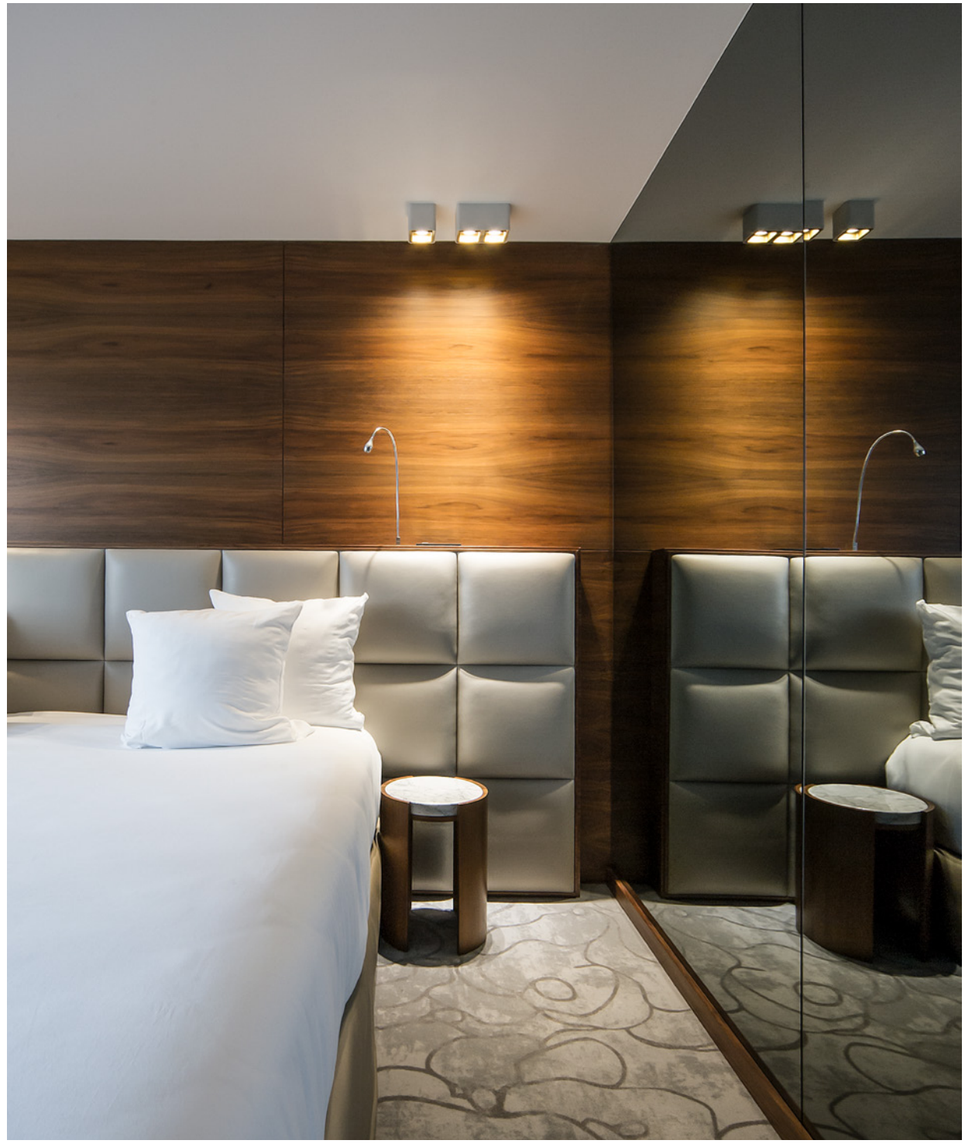

**HOTEL HOWARD | ROQUE INTÉRIEURS** PARIS | FRANCE

# DOCUS

*Ceiling* surface


















## 1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

| | CHF | CODE |
|---|---|---|
| | 248,40 | 186358W_ |
| | 249,80 | 186358G_ |
| | 248,40 | 186358B_ |

DALI

| | CHF | CODE |
|---|---|---|
| | 280,15 | 186359W_ |
| | 281,55 | 186359G_ |
| | 280,15 | 186359B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 610 | >90 | 3 |
| 3000K | 630 | >90 | 5 |
| 2000-3000K* | 420 | >90 | 9 |

*only for phase-cut dim

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 100,75 | 146320W0 |
| | 102,15 | 146320G0 |
| | 100,75 | 146320B0 |

## 2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 191,85 | 146420W0 |
| | 197,35 | 146420G0 |
| | 191,85 | 146420B0 |




## OPTIONAL

inner cover max. 10W
aluminium | **2.0** 2 pieces needed

| | CHF | CODE |
|---|---|---|
| | 31,75 | 911021W1 |
| | 31,75 | 911021G1 |
| | 31,75 | 911021B1 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

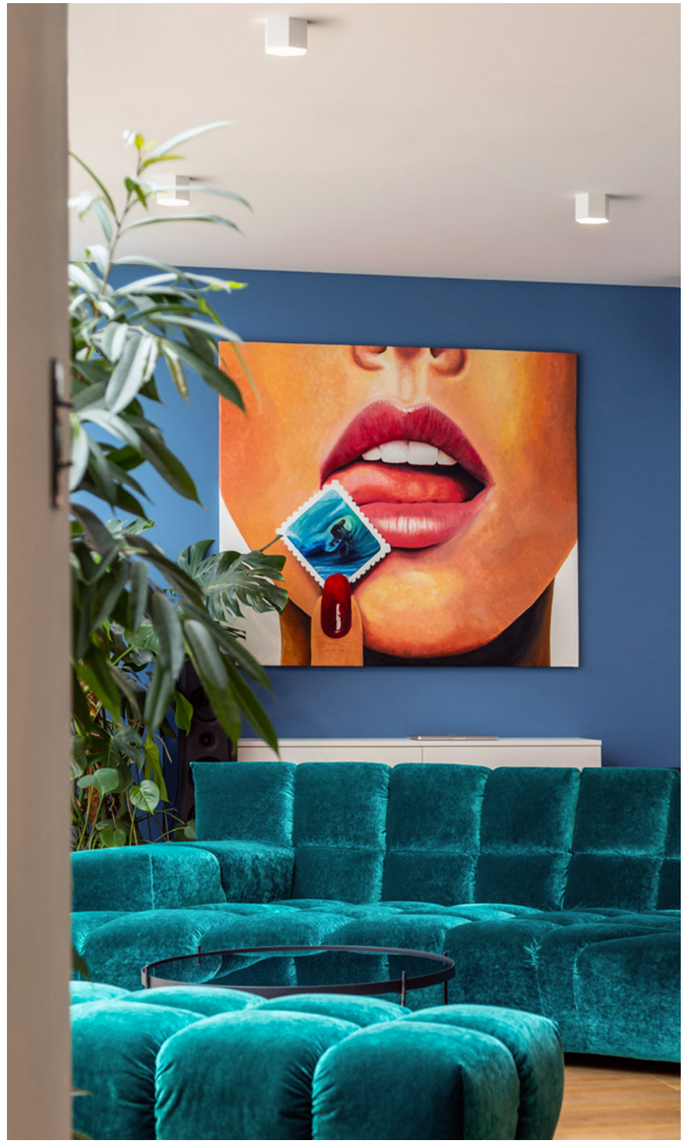

**PRIVATE RESIDENCE | TOM BEIGE / *NESS** HUNGARY

# HEXO mini

*Ceiling* surface










## 1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 88,35 | 258420W0 |
| | 89,70 | 258420G0 |
| | 89,70 | 258420Q0 |
| | 88,35 | 258420B0 |




## OPTIONAL

inner reflector max. 10W
polycarbonate

| | CHF | CODE |
|---|---|---|
| | 13,15 | 900199W3 |
| | 13,15 | 900199G3 |
| | 13,15 | 900199Q3 |
| | 13,15 | 900199B3 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

375 | 391
505 | 531
611



PRIVATE RESIDENCE | **CONCEPT'N** BELGIUM

# HEXO

*Ceiling* surface
















## 1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

| | CHF | CODE |
|---|---|---|
| | 248,40 | 186558W_ |
| | 249,80 | 186558G_ |
| | 249,80 | 186558Q_ |
| | 249,80 | 186558P_ |
| | 248,40 | 186558B_ |

DALI

| | CHF | CODE |
|---|---|---|
| | 280,15 | 186559W_ |
| | 281,55 | 186559G_ |
| | 281,55 | 186559Q_ |
| | 281,55 | 186559P_ |
| | 280,15 | 186559B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 670 | >90 | 3 |
| 3000K | 700 | >90 | 5 |
| 2000-3000K* | 470 | >90 | 9 |

*only for phase-cut dim




## OPTIONAL

inner cover max. 10W
aluminium | **2.0** 2 pieces needed

| | CHF | CODE |
|---|---|---|
| | 31,75 | 911031W1 |
| | 31,75 | 911031G1 |
| | 31,75 | 911031B1 |

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 100,75 | 146520W0 |
| | 102,15 | 146520G0 |
| | 102,15 | 146520Q0 |
| | 102,15 | 146520P0 |
| | 100,75 | 146520B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 191,85 | 146620W0 |
| | 197,35 | 146620G0 |
| | 197,35 | 146620Q0 |
| | 197,35 | 146620P0 |
| | 191,85 | 146620B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**PRIVATE RESIDENCE | SYNOPSIS ARCHITECTURE** BELGIUM

# RAY mini

*Ceiling* surface














375 | 391



507 | 535



613




## 1.0 LED

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

IP20 M-30° L80|55K

| | CHF | CODE |
|---|---|---|
| | 135,25 | 258254WW_ |
| | 135,25 | 258254WM_ |
| | 135,25 | 258254WB_ |
| | 136,65 | 258254MM_ |
| | 136,65 | 258254MB_ |
| | 135,25 | 258254BM_ |
| | 136,65 | 258254QQ_ |
| | 135,25 | 258254BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 480 | >90 | 5 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-ray-mini

LAMP-CONCEPT.CH

back



**HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS** BILZEN | BELGIUM

# RAY mini

*Ceiling* surface

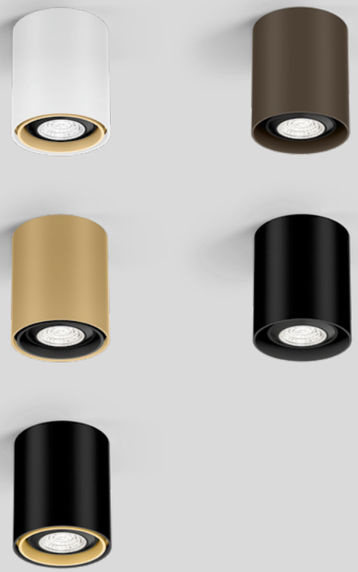






## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 78,70 | 258220W0 |
| | 80,05 | 258220G0 |
| | 80,05 | 258220M0 |
| | 80,05 | 258220Q0 |
| | 78,70 | 258220B0 |




## OPTIONAL

inner reflector max. 10W
polycarbonate

| | CHF | CODE |
|---|---|---|
| | 13,15 | 900199W4 |
| | 13,15 | 900199G4 |
| | 13,15 | 900199M4 |
| | 13,15 | 900199Q4 |
| | 13,15 | 900199B4 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**MAISONME BOUTIQUE HOTEL | ALICE PIUBELLO** BARDOLINO LAKE GARDA | ITALY

# RAY

*Ceiling* surface

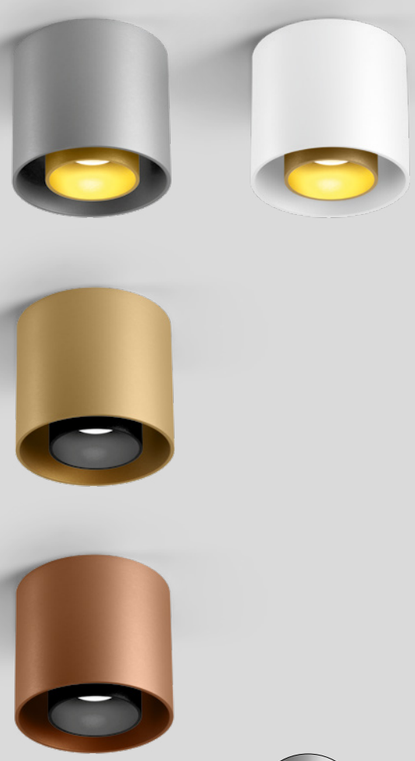







## 1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

| | CHF | CODE |
|---|---|---|
| | 241,50 | 186758W_ |
| | 242,90 | 186758L_ |
| | 242,90 | 186758G_ |
| | 242,90 | 186758M_ |
| | 242,90 | 186758Q_ |
| | 242,90 | 186758P_ |
| | 241,50 | 186758B_ |

DALI

| | CHF | CODE |
|---|---|---|
| | 273,25 | 186759W_ |
| | 274,65 | 186759L_ |
| | 274,65 | 186759G_ |
| | 274,65 | 186759M_ |
| | 274,65 | 186759Q_ |
| | 274,65 | 186759P_ |
| | 273,25 | 186759B_ |

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 93,85 | 146720W0 |
| | 95,25 | 146720L0 |
| | 95,25 | 146720G0 |
| | 95,25 | 146720M0 |
| | 95,25 | 146720Q0 |
| | 95,25 | 146720P0 |
| | 93,85 | 146720B0 |




## OPTIONAL

inner cover max. 10W
aluminium

| | CHF | CODE |
|---|---|---|
| | 31,75 | 911041W1 |
| | 31,75 | 911041G1 |
| | 31,75 | 911041M1 |
| | 31,75 | 911041B1 |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 670 | >90 | 3 |
| 3000K | 700 | >90 | 5 |
| 2000-3000K* | 470 | >90 | 9 |

*only for phase-cut dim

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

341 | 377 | 393
537
615
759
805

PRIVATE RESIDENCE | AGENCE VÉRONIQUE COTRE, FRANCE

# SOLID bijou

*Ceiling* surface

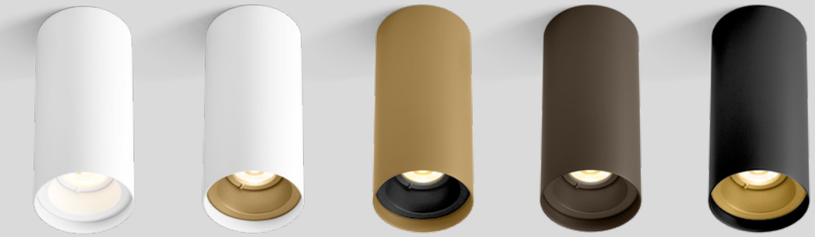




## 1.0

LED COB 6W | phase-cut dim
220-240V | 50-60Hz | incl. driver
aluminium

IP20 M-27° L80|50K

| | CHF | CODE |
|---|---|---|
| | 186,30 | 133864WW_ |
| | 186,30 | 133864WG_ |
| | 188,40 | 133864MB_ |
| | 186,30 | 133864BG_ |
| | 186,30 | 133864BM_ |
| | 188,40 | 133864QQ_ |
| | 186,30 | 133864BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 480 | >90 | 3 |
| 3000K | 510 | >90 | 5 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-solid-bijou

LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | ELLEMVIE - ART & INTERIEUR** THE NETHERLANDS

# SOLID petit

*Ceiling* surface






## 2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L80|50K

| | CHF | CODE |
|---|---|---|
| | 237,40 | 133964WW_ |
| | 237,40 | 133964WG_ |
| | 240,15 | 133964MB_ |
| | 237,40 | 133964BG_ |
| | 237,40 | 133964BM_ |
| | 237,40 | 133964SG_ |
| | 237,40 | 133964ME_ |
| | 240,15 | 133964QQ_ |
| | 237,40 | 133964BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 555 | >90 | 3 |
| 3000K | 585 | >90 | 5 |
| 2000-3000K | 470 | >90 | 9 |

LED module 20 years replaceability




**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-solid-petit

LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | STUDIO ZUYD** THE NETHERLANDS

# SOLID

*Ceiling* surface











## 1.0 LED

LED COB 13W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-34° L80|55K

phase-cut dim

| | CHF | CODE |
|---|---|---|
| | 255,30 | 133764WW_ |
| | 255,30 | 133764WG_ |
| | 259,45 | 133764MB_ |
| | 255,30 | 133764BG_ |
| | 255,30 | 133764BM_ |
| | 259,45 | 133764QQ_ |
| | 255,30 | 133764BB_ |

DALI-2 | push dim

| | CHF | CODE |
|---|---|---|
| | 298,10 | 133765WW_ |
| | 298,10 | 133765WG_ |
| | 302,25 | 133765MB_ |
| | 298,10 | 133765BG_ |
| | 298,10 | 133765BM_ |
| | 302,25 | 133765QQ_ |
| | 298,10 | 133765BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 855 | >90 | 3 |
| 3000K | 905 | >90 | 5 |
| 2000-3000K | 695 | >90 | 9 |

LED module 20 years replaceability

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-25°|355°

| | CHF | CODE |
|---|---|---|
| | 160,10 | 133120WW0 |
| | 160,10 | 133120WG0 |
| | 164,25 | 133120MB0 |
| | 160,10 | 133120BG0 |
| | 160,10 | 133120BM0 |
| | 164,25 | 133120QQ0 |
| | 160,10 | 133120BB0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905






















**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-solid







**PRIVATE RESIDENCE | STUDIO FOOLEN** THE NETHERLANDS

DESIGN AWARD 2024

reddot winner 2023

# TRACE

*Ceiling* surface

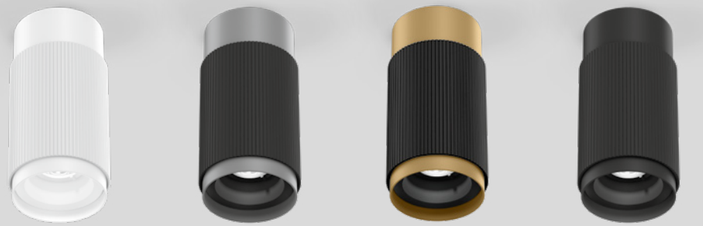



351



511 | 547



593



130

ø65

## 1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-27° L80|50K

| | CHF | CODE |
|---|---|---|
| | 213,90 | 183164W_ |
| | 216,70 | 183164BL_ |
| | 216,70 | 183164CH_ |
| | 213,90 | 183164B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 480 | >90 | 3 |
| 3000K | 510 | >90 | 5 |




**PRIVATE RESIDENCE** GREECE

DESIGN AWARD 2024

reddot winner 2023

# FINLIN

*Ceiling* surface

433
673 | 679
727






## 1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 365,70 | 174184W_ |
| | 365,70 | 174184CH_ |
| | 365,70 | 174184B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 485 | >90 | 5 |




## 2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 379,50 | 174284W_ |
| | 379,50 | 174284CH_ |
| | 379,50 | 174284B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 675 | >90 | 3 |
| 3000K | 730 | >90 | 5 |




## 3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 427,80 | 174384W_ |
| | 427,80 | 174384CH_ |
| | 427,80 | 174384B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 900 | >90 | 3 |
| 3000K | 975 | >90 | 5 |

## OPTIONAL

cover plate adapter for concrete housing

| | CHF | CODE |
|---|---|---|
| | 17,25 | 900194B0 |





reddot winner 2024

# FIL SPIN

*Ceiling* surface

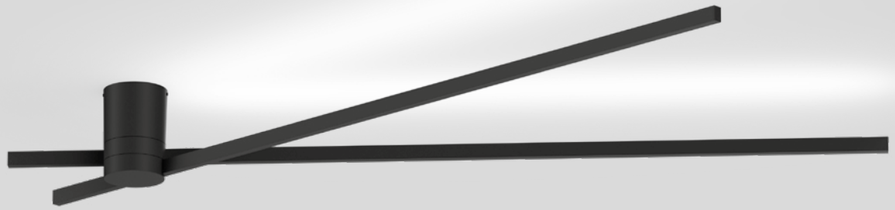

441

681




## 1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

IP20 180° L80|100K

2700K | CRI >90 | 2x905lm

| | CHF | CODE |
|---|---|---|
| | 586,50 | 254584B3 |




LAMP-CONCEPT.CH

back



# TRACE SPIN

*Ceiling* surface

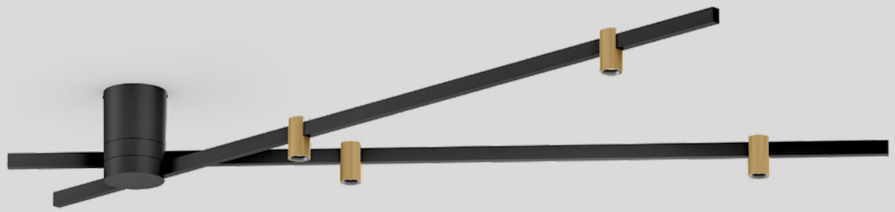




**1.0**

LED COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 180° M-30° L80|50K

2700K | CRI >90 | 4x360lm




| | CHF | CODE |
|---|---|---|
| | 586,50 | 183264CH3 |
| | 586,50 | 183264B3 |

351
511 | 547
593

# PERLEZ SPIN

*Ceiling* surface

169

701

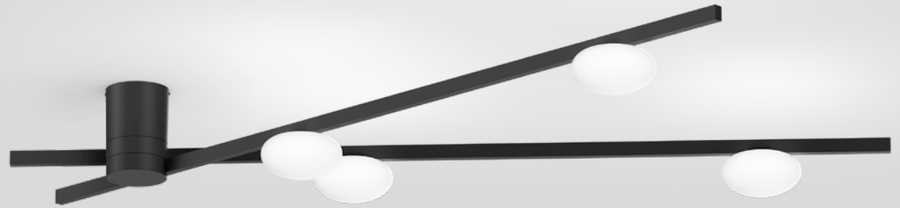




## 1.0

LED COB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP20 180° L80|50K

2700K | CRI >90 | 4x250lm

| | CHF | CODE |
|---|---|---|
| | 724,50 | 192784BW3 |





**PRIVATE RESIDENCE | KWADRAAT** BELGIUM

# TRACE GRID

*Ceiling* surface

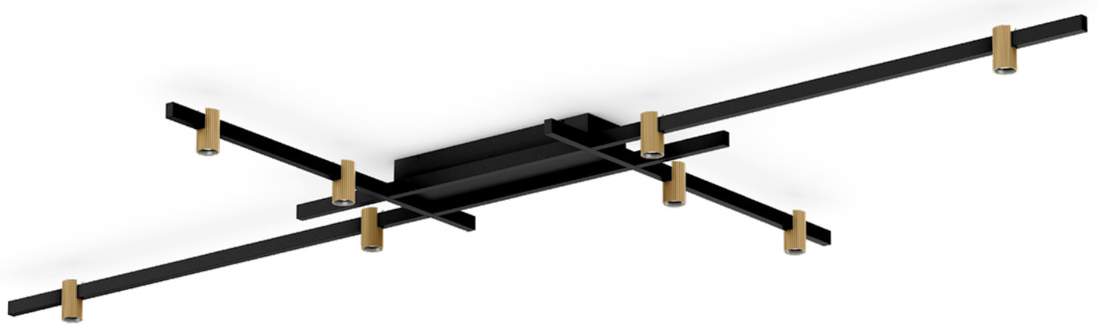

351

511 | 547

593




## 1.0

LED COB 41W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
direct light

IP20 M-30° L80|50K

2700K | CRI >90 | 8x415lm

| | CHF | CODE |
|---|---|---|
| | 959,10 | 183364CH3 |
| | 959,10 | 183364B3 |




## 2.0

LED PCB/COB 35W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
dir./indir. light

IP20 M-30° L80|50K

2700K | CRI >90 | 4x415/2x480lm

| | CHF | CODE |
|---|---|---|
| | 890,10 | 183464CH3 |
| | 890,10 | 183464B3 |

# PERLEZ GRID

*Ceiling* surface

169

701

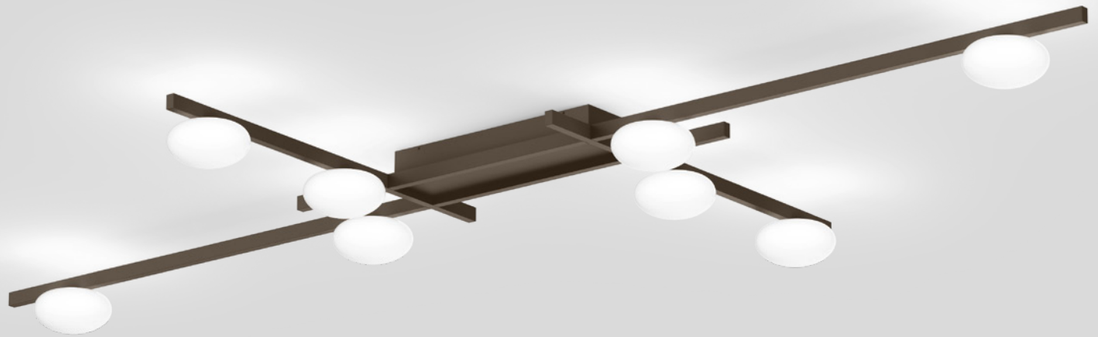




## 1.0

LED COB 40W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
direct light

IP20 L80|50K

2700K | CRI >90 | 8x220lm

| | CHF | CODE |
|---|---|---|
| | 1083,30 | 192884QW3 |
| | 1083,30 | 192884BW3 |



**OFFICE RPD | VIVA ARCHITECTURE** ANTWERP | BELGIUM

# VENN

*Ceiling* surface



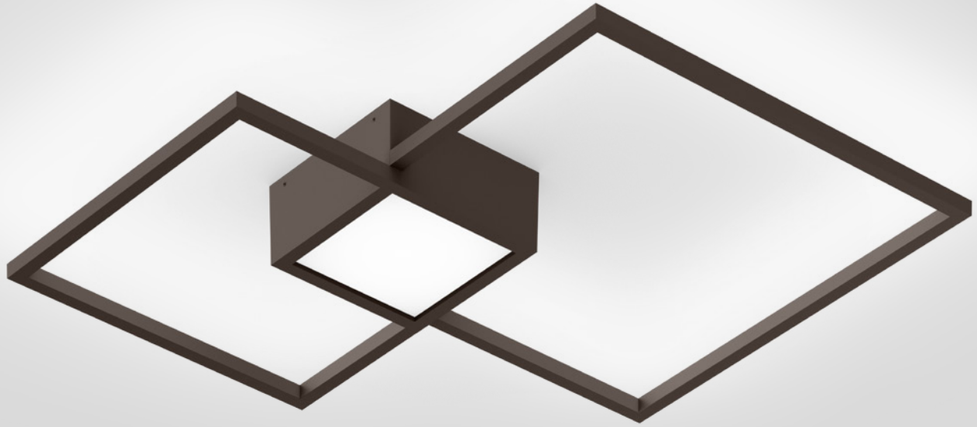







## 1.0

LED PCB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover indirect light

IP20 L70|55K

| | CHF | CODE |
|---|---|---|
| | 938,40 | 149184W_ |
| | 938,40 | 149184Q_ |
| | 938,40 | 149184B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3410 | >90 | 3 |
| 3000K | 3510 | >90 | 5 |

## 2.0

LED PCB 49W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover dir./indir. light

IP20 L70|55K

| | CHF | CODE |
|---|---|---|
| | 1062,60 | 149284W_ |
| | 1062,60 | 149284Q_ |
| | 1062,60 | 149284B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 480/3920 | >90 | 3 |
| 3000K | 495/4035 | >90 | 5 |

**CREATE YOUR OWN VENN**
weverducre.com/venn-configurator



**PRIVATE RESIDENCE | STUDIO REE** THE NETHERLANDS

# DRO

*Ceiling* surface

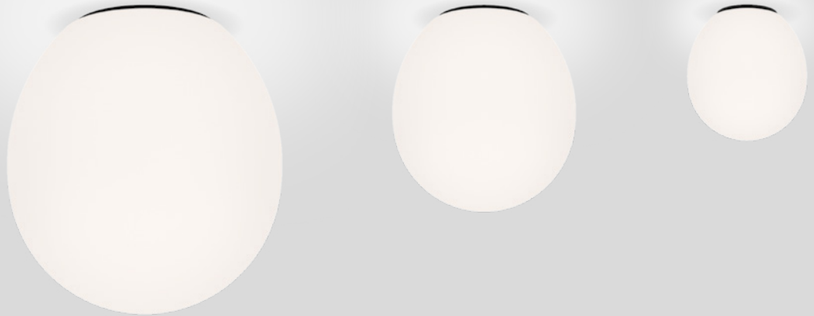










## 1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

| | CHF | CODE |
|---|---|---|
| | 227,70 | 1721G0WB0 |

### OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 340lm | 24,85 | 9010G803 |
| 3000K \| 350lm | 24,85 | 9010G805 |

## 2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

| | CHF | CODE |
|---|---|---|
| | 338,10 | 1722C0WB0 |

### OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 450lm | 14,50 | 9003C103 |

## 3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

| | CHF | CODE |
|---|---|---|
| | 448,50 | 1723E0WB0 |

### OPTIONAL

A60 9W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |



**PRIVATE RESIDENCE | STUDIO REE** THE NETHERLANDS

LAMP-CONCEPT.CH



**IBIS STYLES PREVESSIN | FORTY STUDIO** GENÈVE | SWITZERLAND

# MIRRO

*Ceiling* surface

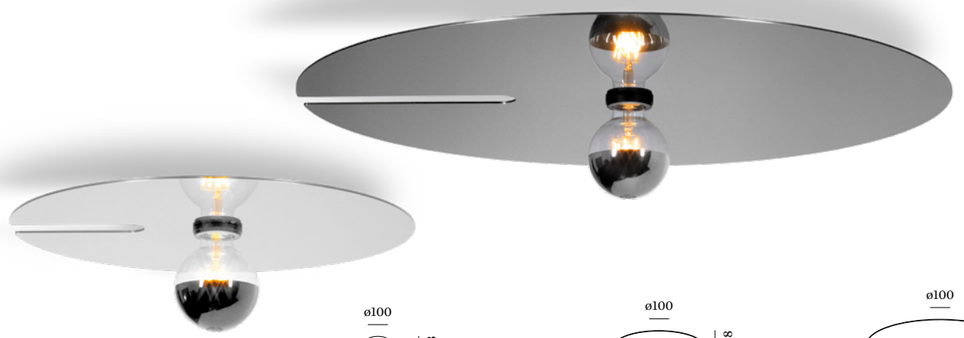










## 1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

IP20

| | CHF | CODE |
|---|---|---|
| | 287,05 | 6321E0GB0 |
| | 287,05 | 6321E0NB0 |
| | 287,05 | 6321E0LB0 |
| | 287,05 | 6321E0BL0 |

### OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 405lm | 44,20 | 9003E139 |

A60 5.5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 405lm | 44,20 | 9003E140 |

## 2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

IP20

| | CHF | CODE |
|---|---|---|
| | 353,30 | 6322E0GB0 |
| | 353,30 | 6322E0NB0 |
| | 353,30 | 6322E0LB0 |
| | 353,30 | 6322E0BL0 |

### OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

## 3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

IP20

| | CHF | CODE |
|---|---|---|
| | 574,10 | 6323E0GB0 |
| | 574,10 | 6323E0NB0 |
| | 574,10 | 6323E0LB0 |
| | 574,10 | 6323E0BL0 |

### OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

467
625
721 | 733



# MIRRO SOFT

*Ceiling* surface









## 2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 353,30 | 6322E0MF0 |
| | 353,30 | 6322E0LF0 |
| | 353,30 | 6322E0IF0 |
| | 353,30 | 6322E0AF0 |

## 3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 574,10 | 6323E0MF0 |
| | 574,10 | 6323E0LF0 |
| | 574,10 | 6323E0IF0 |
| | 574,10 | 6323E0AF0 |

## OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

G95 4.5W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 375lm | 45,55 | 9003E160 |

## OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

G95 4.5W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 375lm | 45,55 | 9003E160 |

471
629



# CLEA

*Ceiling* surface





557

631




## 1.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 396,10 | 181184W_ |
| | 426,45 | 181184LS_ |
| | 426,45 | 181184SG_ |
| | 426,45 | 181184FJ_ |
| | 396,10 | 181184B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 780 | >90 | 3 |
| 3000K | 825 | >90 | 5 |




## 2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 589,30 | 181284W_ |
| | 633,45 | 181284LS_ |
| | 633,45 | 181284SG_ |
| | 633,45 | 181284FJ_ |
| | 589,30 | 181284B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 780 | >90 | 3 |
| 3000K | 825 | >90 | 5 |




## 3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 754,90 | 181384W_ |
| | 801,80 | 181384LS_ |
| | 801,80 | 181384SG_ |
| | 801,80 | 181384FJ_ |
| | 754,90 | 181384B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 770 | >90 | 3 |
| 3000K | 815 | >90 | 5 |



**PRIVATE RESIDENCE | ARTEA** BELGIUM

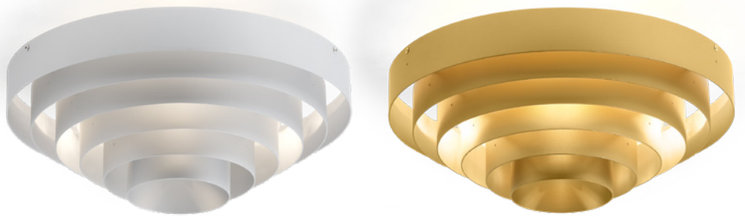

# J.J.W.

*Ceiling* surface

479

633




## 03

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 1193,70 | 2051E0S0 |
| | 1193,70 | 2051E0G0 |

## OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |



# WIRO

*Ceiling* surface





















## 2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 379,50 | 2086E0V0 |
| | 379,50 | 2086E0B0 |

### OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |

## 1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 434,70 | 2082E0V0 |
| | 434,70 | 2082E0B0 |

### OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 380lm | 53,85 | 9003E129 |
| 2700K \| 425lm | 53,85 | 9003E136 |

## 1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 407,10 | 2080E0V0 |
| | 407,10 | 2080E0B0 |

### OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 380lm | 53,85 | 9003E129 |
| 2700K \| 425lm | 53,85 | 9003E136 |

## 3.8 WIRO

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 561,70 | 2083E0V0 |
| | 561,70 | 2083E0B0 |

### OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 380lm | 53,85 | 9003E129 |
| 2700K \| 425lm | 53,85 | 9003E136 |



**URBAN SPACES | STUDIO KOMO** STUTTGART | GERMANY

reddot winner 2021

# ROOMOR OFFICE

*Ceiling* surface











## 1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

IP20 L80|60K UGR ≤ 19/65°

| | CHF | CODE |
|---|---|---|
| | 1028,10 | 1683M5W_ |
| | 1028,10 | 1683M5B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 3660 | >90 | 5 |
| 4000K | 3660 | >90 | 7 |

UGR ≤ 19
65°≤ 3000cd
microprismatic

## 1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 1000,50 | 168385W_ |
| | 1000,50 | 168385B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 3700 | >90 | 5 |
| 4000K | 3700 | >90 | 7 |



# PERLEZ IP44

*Ceiling* surface

169

701












## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 L80|50K

| | CHF | CODE |
|---|---|---|
| | 259.45 | 192484W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 520 | >95 | 3 |
| 3000K | 550 | >95 | 5 |
| 4000K | 580 | >95 | 7 |

## 2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 L80|50K

| | CHF | CODE |
|---|---|---|
| | 273.25 | 192584W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 600 | >95 | 3 |
| 3000K | 630 | >95 | 5 |
| 4000K | 665 | >95 | 7 |

## 3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 L80|50K

| | CHF | CODE |
|---|---|---|
| | 300.85 | 192684W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 645 | >95 | 3 |
| 3000K | 665 | >95 | 5 |
| 4000K | 705 | >95 | 7 |



**PRIVATE RESIDENCE | ATELIER B** AUSTRIA

# MIRBI IP44

*Ceiling* surface











## 1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal PMMA cover

IP44 L80|60K

3000K | CRI >90 | 640lm

| | CHF | CODE |
|---|---|---|
| | 255,30 | 175488W5 |
| | 255,30 | 175488BW5 |

## 2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal PMMA cover

IP44 L80|60K

3000K | CRI >90 | 640lm

| | CHF | CODE |
|---|---|---|
| | 269,10 | 175588W5 |
| | 269,10 | 175588BW5 |



**PRIVATE RESIDENCE | AJ ARCHITECTEN** BELGIUM

# TAIO IP65

*Ceiling* surface






## 1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

IP65 W-105° L80|55K

| | CHF | CODE |
|---|---|---|
| | 273,25 | 180884W_ |
| | 273,25 | 180884Q_ |
| | 273,25 | 180884B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 455 | >90 | 3 |
| 3000K | 510 | >90 | 5 |

165
747
757
803



**GAW HOPPEHOF** ERTVELDE | BELGIUM

# ROB IP44

*Ceiling* surface






ø160




ø256




ø345

769

## 1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 231,85 | 701188W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1170 | >90 | 3 |
| 3000K | 1220 | >90 | 5 |

## 2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 338,10 | 701288W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1800 | >90 | 3 |
| 3000K | 1810 | >90 | 5 |

## 3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 462,30 | 701388W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3340 | >90 | 3 |
| 3000K | 3360 | >90 | 5 |



**ORL PRAXIS SEMADENI | EMULSION INNENARCHITEKTUR** CHUR | SWITZERLAND

# ROBY IP44

*Ceiling* surface














## 1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 300,85 | 135188W_ |
| | 300,85 | 135188B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1080 | >90 | 3 |
| 3000K | 1130 | >90 | 5 |

## 2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 438,85 | 135288W_ |
| | 438,85 | 135288B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1670 | >90 | 3 |
| 3000K | 1680 | >90 | 5 |

## 3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 590,65 | 135388W_ |
| | 590,65 | 135388B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3090 | >90 | 3 |
| 3000K | 3100 | >90 | 5 |



**PRIVATE RESIDENCE | FORUM OFFICE** BELGIUM

# TOWNA IP44

*Ceiling* surface














## 1.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 347,80 | 178188W_ |
| | 351,90 | 178188J_ |
| | 351,90 | 178188K_ |
| | 351,90 | 178188Z_ |
| | 347,80 | 178188B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1070 | >90 | 3 |
| 3000K | 1110 | >90 | 5 |

## 2.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 498,20 | 178288W_ |
| | 503,70 | 178288J_ |
| | 503,70 | 178288K_ |
| | 503,70 | 178288Z_ |
| | 498,20 | 178288B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1650 | >90 | 3 |
| 3000K | 1660 | >90 | 5 |

## 3.0

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 651,40 | 178388W_ |
| | 661,05 | 178388J_ |
| | 661,05 | 178388K_ |
| | 661,05 | 178388Z_ |
| | 651,40 | 178388B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3050 | >90 | 3 |
| 3000K | 3060 | >90 | 5 |

















# ROSS IP54

*Ceiling* surface








ø260




ø320




ø450



771

3-step output selector

3000K – 6000K colour switch

## 1.0

LED PCB 9/11/15W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
960lm/1170lm/1630lm

| | CHF | CODE |
|---|---|---|
| | 109,05 | 715184W9 |

## 2.0

LED PCB 10/15/20W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
1270lm/1810lm/2360lm

| | CHF | CODE |
|---|---|---|
| | 178,05 | 715284W9 |

## 3.0

LED PCB 28/33/37W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
4350lm/5000lm/5570lm

| | CHF | CODE |
|---|---|---|
| | 310,50 | 715384W9 |

# Track / System



## STREX TRACK



48V TRACKS 313 | CENO 321 | LECA 325 | DOMY 327 | MATCH 329



TRACE MINI 331 | MICK 333 | BOX 335 | DOCUS 337 | HEXO 339 | RAY 341



DOT MODULE 343 | OPAL MODULE 343 | COZY CONE 345 | MATCH 347 | TRACE 351 | ODREY 353



OPLIA 357 | SOLLI 359

## 1-PHASE TRACK



1-PHASE TRACKS 361 | PILLO 363 | SARA 365 | SQUBE 369 | PIRRO 371



DRO 373 | HEXO MINI 375 | RAY MINI 375 | HEXO 377 | RAY 377 | ODREY 379



RUVI 383

## 3-PHASE TRACK



3-PHASE TRACKS 385 | LIKO 387 | SQUBE 389 | HEXO MINI 391 | RAY MINI 391



HEXO 393 | RAY 393 | ROOMOR OFFICE 395

## SYSTEM



QUBBY SYSTEM 397 | FLYRA SYSTEM 401 | ELLO SYSTEM 405 | ILANE 409

Schienensysteme sind einfacher als gedacht: 1-Phasen-Schienen steuern alle Leuchten gemeinsam, 3-Phasen-Schienen erlauben die separate Bedienung von Strahlern, Insets und Pendeln. Das 48-Volt-System bietet maximale Flexibilität für verschiedene Leuchten – und lässt sich bequem per Smartphone steuern.

Les systèmes sur rail sont plus simples qu'ils n'en ont l'air : les rails 1 phase contrôlent tous les luminaires ensemble, tandis que les rails 3 phases permettent de gérer séparément spots, modules et suspensions. Le système 48 volts offre une flexibilité maximale et se commande facilement via smartphone.

weverducre.com/track-lighting

# track

| | STREX<br>48V DALI<br>page 313 | 1-PHASE TRACK<br>220–240V<br>page 361 | 3-PHASE TRACK<br>220–240V DALI<br>page 385 |
|---|---|---|---|
| 1 CHOOSE YOUR MOUNTING | recessed · surface · suspended · suspended indirect | recessed · surface · suspended | surface · suspended |
| 2 INSTALL IT IN YOUR LAYOUT | ILT+O | ILUO | ILUO |
| 3 CHOOSE YOUR DRIVER | remote · in-line · in-track · ceiling | | |
| 4 COMBINE IT WITH INSETS | | | |

For more support and an extended layout of track systems, please check our FAQ section at weverducre.com/faq

# mounting

weverducre.com/strex-configurator

Discreetly hidden in the ceiling, as a striking surface-mounted option, or floating freely in the room – with three mounting types you'll find the right solution for any space. Tip: sketch your project and note where the track should run and which zones you want to highlight for a clearer overview.

**CUSTOM CUT AVAILABLE**
Have a look on page 917 or browse online: weverducre.com/strex-custom

## CEILING RECESSED




### STREX RECESSED

track 48V | 15A | DALI

SELV U 31-33 65 5-25

| | | CHF | CODE |
|---|---|---|---|
| | 1m | 158,70 | 904111W0 |
| | 1m | 158,70 | 904111B0 |
| | 2m | 324,30 | 904112W0 |
| | 2m | 324,30 | 904112B0 |
| | 3m | 481,65 | 904113W0 |
| | 3m | 481,65 | 904113B0 |




### M | MOUNTING BRACKET

recessed mounting bracket
for 1m - 2pcs needed | for 2m - 4pcs needed | for 3m - 6pcs needed

| | CHF | CODE |
|---|---|---|
| | 17,25 | 904141I0 |




### E | END CAP

| | CHF | CODE |
|---|---|---|
| | 16,60 | 904121W0 |
| | 16,60 | 904121B0 |

## CEILING SURFACE




### STREX SURFACE

track 48V | 15A | DALI

SELV

| | | CHF | CODE |
|---|---|---|---|
| | 1m | 122,85 | 904211W0 |
| | 1m | 122,85 | 904211B0 |
| | 2m | 240,15 | 904212W0 |
| | 2m | 287,05 | 904212L0 |
| | 2m | 287,05 | 904212M0 |
| | 2m | 287,05 | 904212Q0 |
| | 2m | 240,15 | 904212B0 |
| | 3m | 356,05 | 904213W0 |
| | 3m | 426,45 | 904213L0 |
| | 3m | 426,45 | 904213M0 |
| | 3m | 426,45 | 904213Q0 |
| | 3m | 356,05 | 904213B0 |




### E | END CAP

| | CHF | CODE |
|---|---|---|
| | 10,35 | 904221W0 |
| | 11,05 | 904221M0 |
| | 11,05 | 904221Q0 |
| | 10,35 | 904221B0 |

## CEILING SUSPENDED




### STREX SUSPENDED

track 48V | 15A | DALI

SELV

| | | CHF | CODE |
|---|---|---|---|
| | 1m | 122,85 | 904211W0 |
| | 1m | 122,85 | 904211B0 |
| | 2m | 240,15 | 904212W0 |
| | 2m | 287,05 | 904212L0 |
| | 2m | 287,05 | 904212M0 |
| | 2m | 287,05 | 904212Q0 |
| | 2m | 240,15 | 904212B0 |
| | 3m | 356,05 | 904213W0 |
| | 3m | 426,45 | 904213L0 |
| | 3m | 426,45 | 904213M0 |
| | 3m | 426,45 | 904213Q0 |
| | 3m | 356,05 | 904213B0 |




### STREX SUSP. INDIRECT

track 48V | 15A | DALI | with indirect light | 3.0m suspension sets already included | 15W/m

SELV

3000K | CRI >90 | 1900lm

| | | CHF | CODE |
|---|---|---|---|
| | 2m | 793,50 | 904512W5 |
| | 2m | 793,50 | 904512B5 |

3000K | CRI >90 | 2850lm

| | | CHF | CODE |
|---|---|---|---|
| | 3m | 931,50 | 904513W5 |
| | 3m | 931,50 | 904513B5 |




### S | SUSPENSION SET

complete suspension set | incl. ceiling fixation bracket | not needed for indirect light version | for 1m - 2pcs needed | for 2m - 3pcs needed
for 3m - 4pcs needed

stainless steel colour

| | | CHF | CODE |
|---|---|---|---|
| | max. 1.5m | 40,05 | 904341I0 |
| | max. 3m | 42,80 | 904342I0 |

black colour

| | | CHF | CODE |
|---|---|---|---|
| | max. 1.5m | 40,05 | 904341B0 |
| | max. 3m | 42,80 | 904342B0 |




### E | END CAP

| | CHF | CODE |
|---|---|---|
| | 10,35 | 904221W0 |
| | 11,05 | 904221M0 |
| | 11,05 | 904221Q0 |
| | 10,35 | 904221B0 |

# layout

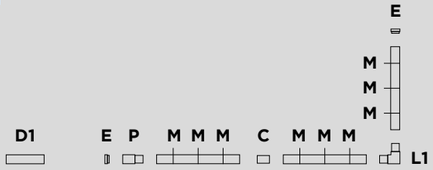




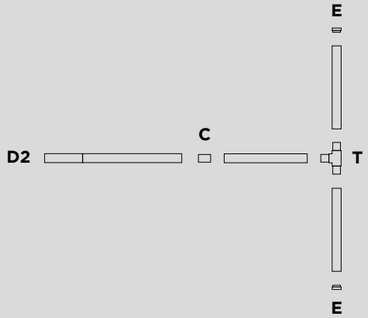





weverducre.com/strex-configurator

**M | S | E**
Choose your mounting
on page 312

**D | P**
Choose your driver | power feed
on page 316

**GOOD TO KNOW**
Electrical components of champagne or bronze connectors and drivers will be black.

## ALL MOUNTINGS




### BLANK COVER

| | | CHF | CODE |
|---|---|---|---|
| | 2m | 70,40 | 911002W0 |
| | 2m | 70,40 | 911002B0 |




### C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

| | CHF | CODE |
|---|---|---|
| | 55,20 | 904431W0 |
| | 55,20 | 904431B0 |

## CEILING RECESSED




### L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

| | CHF | CODE |
|---|---|---|
| | 249,80 | 904132W0 |
| | 249,80 | 904132B0 |




### L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation

| | CHF | CODE |
|---|---|---|
| | 249,80 | 904133W0 |
| | 249,80 | 904133B0 |

## CEILING SURFACE | SUSPENDED




### L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

| | CHF | CODE |
|---|---|---|
| | 162,85 | 904232W0 |
| | 167,00 | 904232MB0 |
| | 167,00 | 904232QB0 |
| | 162,85 | 904232B0 |




### L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation

| | CHF | CODE |
|---|---|---|
| | 162,85 | 904233W0 |
| | 167,00 | 904233MB0 |
| | 167,00 | 904233QB0 |
| | 162,85 | 904233B0 |




### T | T-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

| | CHF | CODE |
|---|---|---|
| | 273,25 | 904234W0 |
| | 273,25 | 904234B0 |




### X | X-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

| | CHF | CODE |
|---|---|---|
| | 309,15 | 904235W0 |
| | 309,15 | 904235B0 |

# driver

weverducre.com/strex-configurator

A driver regulates the current flowing through your LED lights, preventing overheating and unwanted flickering. Which is best suited to your STREX system depends on the chosen installation. The most elegant solution is an in-track driver, but many other variants are also available.

**GOOD TO KNOW**
Electrical components of champagne or bronze connectors and drivers will be black.

## CEILING RECESSED | SURFACE




### D1 | REMOTE DRIVER

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed adapter

220-240V — 48V

| | | CHF | CODE |
|---|---|---|---|
| | 100W \| 48V | 122,85 | 90218901 |
| | 150W \| 48V | 149,05 | 90218902 |

for more information see page 917




### P | POWER FEED

48V | 15A | DALI | end/middle power
feed adapter | max. 4 x 1.5mm²

| | CHF | CODE |
|---|---|---|
| | 52,45 | 904451W0 |
| | 52,45 | 904451B0 |




### D2 | IN LINE DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring

220-240V DALI SELV IN — 48V DALI SELV OUT

| | | CHF | CODE |
|---|---|---|---|
| | 100W | 383,65 | 904262W0 |
| | 100W | 383,65 | 904262B0 |
| | 150W | 397,45 | 904272W0 |
| | 150W | 397,45 | 904272B0 |




### D3 | IN TRACK DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power end feed function
with in line connection box

220-240V — 48V

| | | CHF | CODE |
|---|---|---|---|
| | 100W | 329,85 | 904263W0 |
| | 100W | 334,00 | 904263MB0 |
| | 100W | 334,00 | 904263QB0 |
| | 100W | 329,85 | 904263B0 |




| | | CHF | CODE |
|---|---|---|---|
| | 250W | 385,05 | 904283W0 |
| | 250W | 389,20 | 904283MB0 |
| | 250W | 389,20 | 904283QB0 |
| | 250W | 385,05 | 904283B0 |




### D4 | IN TRACK DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed function
with in track connection

220-240V — 48V

| | | CHF | CODE |
|---|---|---|---|
| | 100W | 314,65 | 904264W0 |
| | 100W | 314,65 | 904264B0 |




| | | CHF | CODE |
|---|---|---|---|
| | 250W | 369,85 | 904284W0 |
| | 250W | 369,85 | 904284B0 |

## CEILING SUSPENDED




### D1 | CEILING DRIVER

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed adapter
incl. DALI through wiring
driver ceiling mounted

220-240V DALI SELV IN — 48V DALI SELV OUT

| | | CHF | CODE |
|---|---|---|---|
| | 100W | 411,25 | 904361W0 |
| | 100W | 411,25 | 904361B0 |
| | 150W | 438,85 | 904371W0 |
| | 150W | 438,85 | 904371B0 |




### D2 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring
suspended driver in line with profile

220-240V DALI SELV IN — 48V DALI SELV OUT

| | | CHF | CODE |
|---|---|---|---|
| | 100W | 448,50 | 904362W0 |
| | 100W | 448,50 | 904362B0 |
| | 150W | 480,25 | 904372W0 |
| | 150W | 480,25 | 904372B0 |




### D3 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed function
incl. 3m power cable
suspended driver in the profile

220-240V — 48V

| | | CHF | CODE |
|---|---|---|---|
| | 100W | 369,85 | 904363W0 |
| | 100W | 374,00 | 904363MB0 |
| | 100W | 374,00 | 904363QB0 |
| | 100W | 369,85 | 904363B0 |




| | | CHF | CODE |
|---|---|---|---|
| | 250W | 434,70 | 904383W0 |
| | 250W | 434,70 | 904383B0 |




### D4 | REMOTE DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed function
incl. 3m power cable
incl. remote driver

220-240V — 48V

| | | CHF | CODE |
|---|---|---|---|
| | 100W | 328,45 | 904364W0 |
| | 100W | 328,45 | 904364B0 |
| | 150W | 356,05 | 904374W0 |
| | 150W | 356,05 | 904374B0 |




| | | CHF | CODE |
|---|---|---|---|
| | 250W | 393,30 | 904384W0 |
| | 250W | 393,30 | 904384B0 |

# control



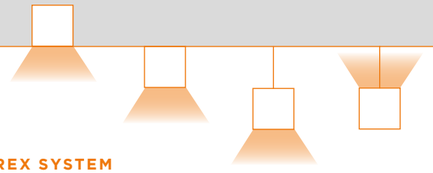

## ALL MOUNTINGS




**WIRELESS CASAMBI CONTROL**

8W | adapter for wireless control
of 64 DALI fixtures in max. 8 groups

| | CHF | CODE |
|---|---|---|
| | 710,70 | 904491W0 |
| | 710,70 | 904491B0 |

## HOW TO CONTROL MY STREX SYSTEM

Das Großartige am STREX-System? Es bietet unzählige Möglichkeiten. Das Schalten oder Dimmen Ihrer Leuchten ist mit DALI ganz einfach. Wenn Sie kein fest verdrahtetes System installieren möchten, wählen Sie eine flexiblere Lösung – alles, was Sie benötigen, sind ein Casambi-Steuermodul und kompatible DALI-Module.

Qu'est-ce qui rend le système STREX si intéressant ? Il offre d'innombrables possibilités. Allumer ou varier l'intensité de vos luminaires est très simple avec DALI. Et si vous ne souhaitez pas installer un système câblé, optez pour une configuration plus flexible – il vous suffit d'un module de commande Casambi et d'inserts DALI compatibles.

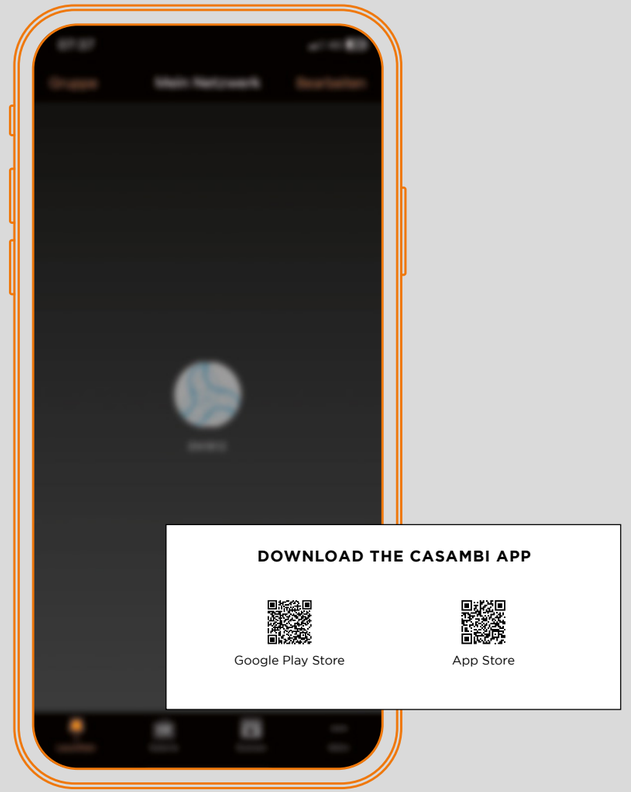


CREATE A SCENE FOR YOUR
INDIVIDUAL LIGHTING SOLUTION





# CENO on STREX

*48V system*










## 1.0

LED COB 10W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim

| | CHF | CODE |
|---|---|---|
| | 231,85 | 166562W_ |
| | 231,85 | 166562BQ_ |
| | 231,85 | 166562K_ |
| | 231,85 | 166562CH_ |
| | 231,85 | 166562B_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 351,90 | 166565W_ |
| | 351,90 | 166565BQ_ |
| | 351,90 | 166565K_ |
| | 351,90 | 166565CH_ |
| | 351,90 | 166565B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 480 | >90 | 3 |
| 3000K | 510 | >90 | 5 |

accessories on page 910

## 2.0

LED COB 17W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim

| | CHF | CODE |
|---|---|---|
| | 356,05 | 166662W_ |
| | 356,05 | 166662BQ_ |
| | 356,05 | 166662K_ |
| | 356,05 | 166662CH_ |
| | 356,05 | 166662B_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 462,30 | 166665W_ |
| | 462,30 | 166665BQ_ |
| | 462,30 | 166665K_ |
| | 462,30 | 166665CH_ |
| | 462,30 | 166665B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x480 | >90 | 3 |
| 3000K | 2x510 | >90 | 5 |

accessories on page 910




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |







**PRIVATE RESIDENCE | STUDIO BINNEN** THE NETHERLANDS



# LECA on STREX

*48V system*

135

189

569




## 1.0

LED COB 7W | 48V
aluminium | PC adapter

IP20 0-90°|350° M-31° L80|50K

non dim

| | CHF | CODE |
|---|---|---|
| | 245,65 | 188662W_ |
| | 245,65 | 188662BQ_ |
| | 245,65 | 188662B_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 364,35 | 188665W_ |
| | 364,35 | 188665BQ_ |
| | 364,35 | 188665B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 585 | >90 | 3 |
| 3000K | 620 | >90 | 5 |




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |





# DOMY on STREX

*48V system*




## 1.0

LED COB 7W | 48V
aluminium | glass | PC adapter

IP20 0-90°|350° M-25° L80|50K

non dim

| | CHF | CODE |
|---|---|---|
| | 242,90 | 107452WLS_ |
| | 242,90 | 107452WFJ_ |
| | 242,90 | 107452WSG_ |
| | 242,90 | 107452BT_ |
| | 242,90 | 107452BB_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 361,60 | 107455WLS_ |
| | 361,60 | 107455WFJ_ |
| | 361,60 | 107455WSG_ |
| | 361,60 | 107455BT_ |
| | 361,60 | 107455BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 560 | >90 | 3 |
| 3000K | 575 | >90 | 5 |



**RESTAURANT GARDENS | ANDREAS HUHN ARCHITEKTEN** TÜBINGEN I GERMANY

DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023

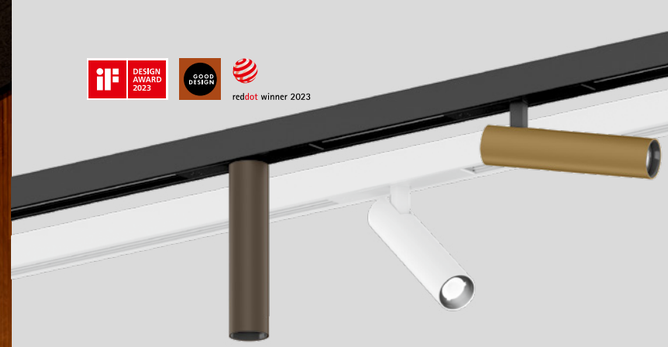

# MATCH on STREX

48V *system* 61 | 137 | 153

193

415 | 509

571

589 | 685

723 | 729




## 1.0

LED COB 10W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-30° L80|50K

non dim

| | CHF | CODE |
|---|---|---|
| | 242,90 | 179152W_ |
| | 251,20 | 179152BL_ |
| | 251,20 | 179152CH_ |
| | 251,20 | 179152BQ_ |
| | 242,90 | 179152B_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 361,60 | 179155W_ |
| | 369,85 | 179155BL_ |
| | 369,85 | 179155CH_ |
| | 369,85 | 179155BQ_ |
| | 361,60 | 179155B_ |

| LIGHT COLOUR | LUMEN \| CRI | CODE |
|---|---|---|
| 2700K | 530 \| >90 | 3 |
| 3000K | 560 \| >90 | 5 |

accessories on page 910



# TRACE mini on STREX

*48V system*

591




## 1.0

LED PCB 5W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-30° L80|50K

non dim

| | CHF | CODE |
|---|---|---|
| | 172,50 | 333552W_ |
| | 172,50 | 333552BM_ |
| | 172,50 | 333552B_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 255,30 | 333555W_ |
| | 255,30 | 333555BM_ |
| | 255,30 | 333555B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 326 | >90 | 3 |
| 3000K | 336 | >90 | 5 |



**DENTAL PRACTICE M.K.A. | DMG ARCHITECTURAL SOLUTIONS** KAPELLEN | BELGIUM

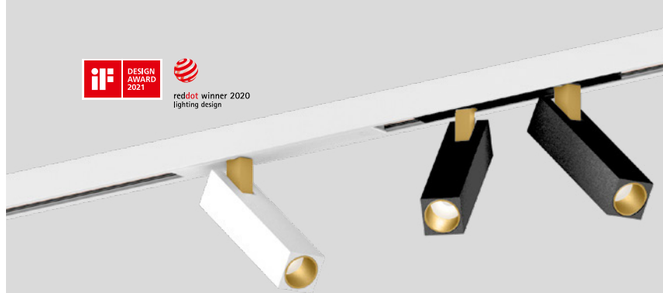

# MICK on STREX

*48V system*

199

687 | 691







## 1.0

LED COB 13W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-23° L80|50K

non dim

| | CHF | CODE |
|---|---|---|
| | 260,85 | 159442J_ |
| | 260,85 | 159442K_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 393,30 | 159445J_ |
| | 393,30 | 159445K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 415 | >90 | 3 |
| 3000K | 435 | >90 | 5 |

accessories on page 910

## 2.0

LED COB 22W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-23° L80|50K

non dim

| | CHF | CODE |
|---|---|---|
| | 390,45 | 159542J_ |
| | 390,45 | 159542K_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 536,85 | 159545J_ |
| | 536,85 | 159545K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x445 | >90 | 3 |
| 3000K | 2x465 | >90 | 5 |

accessories on page 910

SALES CONNECTION
LAMP-CONCEPT.CH

back



# BOX on STREX

*48V system*






## 1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 505lm

| | | CHF | CODE |
|---|---|---|---|
| | | 259,45 | 258162W_3 |
| | | 259,45 | 258162B_3 |
| | DALI-2 | 325,70 | 258165W_3 |
| | DALI-2 | 325,70 | 258165B_3 |

adapter | 3000K | CRI >90 | 535lm

| | | CHF | CODE |
|---|---|---|---|
| | | 259,45 | 258162W_5 |
| | | 259,45 | 258162B_5 |
| | DALI-2 | 325,70 | 258165W_5 |
| | DALI-2 | 325,70 | 258165B_5 |

housing | inner reflector colour

| | CODE |
|---|---|
| | W |
| | WM |
| | E |
| | M |
| | H |
| | Q |
| | CH |
| | B |

only for ceiling surface and suspended tracks

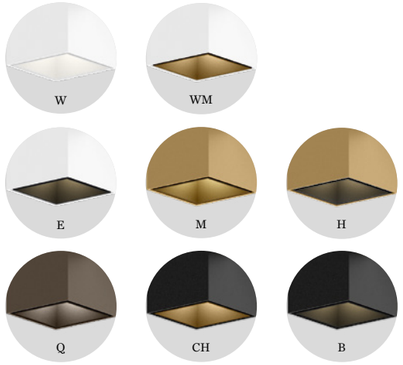


235
607
765
815

# DOCUS on STREX

*48V system*








## 1.0

LED COB 9W | 48V
aluminium

IP20 M-Z5° L80|55K

adapter | 2700K | CRI >90 | 505lm

| | | CHF | CODE |
|---|---|---|---|
| | | 269,10 | 258362W_3 |
| | | 269,10 | 258362B_3 |
| | DALI-2 | 335,35 | 258365W_3 |
| | DALI-2 | 335,35 | 258365B_3 |

adapter | 3000K | CRI >90 | 535lm

| | | CHF | CODE |
|---|---|---|---|
| | | 269,10 | 258362W_5 |
| | | 269,10 | 258362B_5 |
| | DALI-2 | 335,35 | 258365W_5 |
| | DALI-2 | 335,35 | 258365B_5 |

housing | inner reflector colour

| | CODE |
|---|---|
| | W |
| | J |
| | E |
| | K |
| | B |

only for ceiling surface and suspended tracks

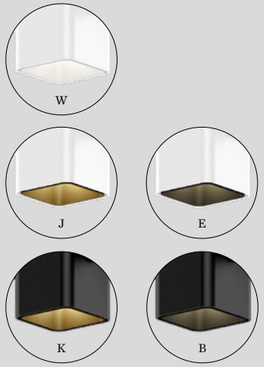



# HEXO on STREX

*48V system*







## 1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 505lm

| | | CHF | CODE |
|---|---|---|---|
| | | 269,10 | 258462W_3 |
| | | 269,10 | 258462B_3 |
| | DALI-2 | 335,35 | 258465W_3 |
| | DALI-2 | 335,35 | 258465B_3 |

adapter | 3000K | CRI >90 | 535lm

| | | CHF | CODE |
|---|---|---|---|
| | | 269,10 | 258462W_5 |
| | | 269,10 | 258462B_5 |
| | DALI-2 | 335,35 | 258465W_5 |
| | DALI-2 | 335,35 | 258465B_5 |

housing | inner reflector colour

| | CODE |
|---|---|
| | W |
| | J |
| | E |
| | Q |
| | K |
| | B |

only for ceiling surface and suspended tracks

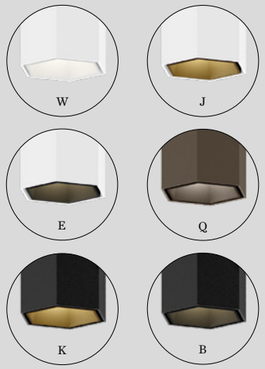



**PRIVATE RESIDENCE | AJ ARCHITECTEN** BELGIUM

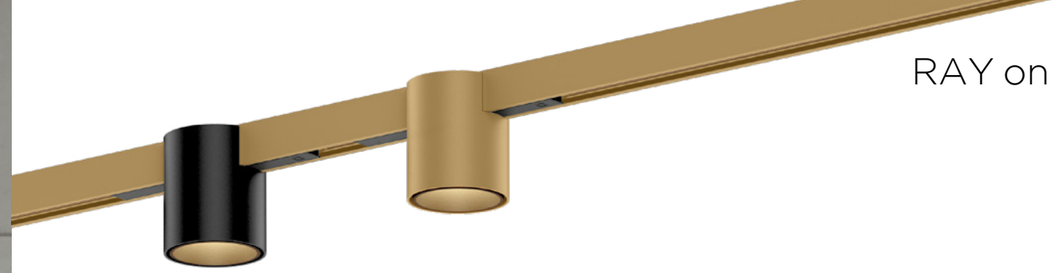

# RAY on STREX

*48V system*




## 1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 485lm

| | CHF | CODE |
|---|---|---|
| | 259,45 | 258262W_3 |
| | 259,45 | 258262B_3 |
| DALI-2 | 325,70 | 258265W_3 |
| DALI-2 | 325,70 | 258265B_3 |

adapter | 3000K | CRI >90 | 515lm

| | CHF | CODE |
|---|---|---|
| | 259,45 | 258262W_5 |
| | 259,45 | 258262B_5 |
| DALI-2 | 325,70 | 258265W_5 |
| DALI-2 | 325,70 | 258265B_5 |

housing | inner reflector colour

| CODE |
|---|
| W |
| WM |
| E |
| M |
| H |
| Q |
| CH |
| B |

only for ceiling surface and suspended tracks

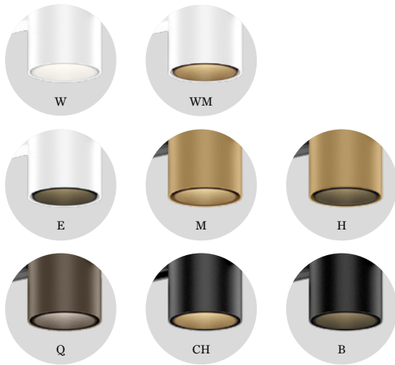


251
537
615
759
805



FORUM ADVOCATEN | VRV ARCHITECTEN ANTWERP | BELGIUM

# STREX MODULE

*48V system*












## 1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 W-40° UGR≤19 L80|60K

non dim

| | CHF | CODE |
|---|---|---|
| | 383,65 | 171362W_ |
| | 383,65 | 171362B_ |

DALI

| | CHF | CODE |
|---|---|---|
| | 474,75 | 171365W_ |
| | 474,75 | 171365B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 840 | >90 | 3 |
| 3000K | 860 | >90 | 5 |

## 1.0 OPAL

LED PCB 15W | 48V
PC adapter | cover
PMMA opal cover

IP20 L80|60K

non dim

| | CHF | CODE |
|---|---|---|
| | 259,45 | 171382W_ |
| | 259,45 | 171382B_ |

DALI

| | CHF | CODE |
|---|---|---|
| | 314,65 | 171385W_ |
| | 314,65 | 171385B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 620 | >90 | 3 |
| 3000K | 640 | >90 | 5 |

## 2.0 OPAL

LED PCB 29W | 48V
PC adapter | cover
PMMA opal cover

IP20 L80|60K

non dim

| | CHF | CODE |
|---|---|---|
| | 371,25 | 171482W_ |
| | 371,25 | 171482B_ |

DALI

| | CHF | CODE |
|---|---|---|
| | 426,45 | 171485W_ |
| | 426,45 | 171485B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1240 | >90 | 3 |
| 3000K | 1280 | >90 | 5 |







**MORE VERSIONS ONLINE**
weverducre.com/more-strex-module



# COZY CONE on STREX

*48V system*












## 1.0

LED PCB 7W | 48V | DALI-2
aluminium | glass | PC adapter
black and T– black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 480lm

| | CHF | CODE |
|---|---|---|
| | 382,30 | 241665LS3 |
| | 382,30 | 241665SG3 |
| | 382,30 | 241665FJ3 |
| | 393,30 | 241665T3 |
| | 382,30 | 241665B3 |

## 2.0

LED PCB 7W | 48V | DALI-2
aluminium | glass | PC adapter
black and T – black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 510lm

| | CHF | CODE |
|---|---|---|
| | 389,20 | 241765LS3 |
| | 389,20 | 241765SG3 |
| | 389,20 | 241765FJ3 |
| | 400,20 | 241765T3 |
| | 389,20 | 241765B3 |

## 3.0

LED PCB 7W | 48V |DALI-2
aluminium | glass | PC adapter
black and T – black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 520lm

| | CHF | CODE |
|---|---|---|
| | 396,10 | 241865LS3 |
| | 396,10 | 241865SG3 |
| | 396,10 | 241865FJ3 |
| | 407,10 | 241865T3 |
| | 396,10 | 241865B3 |




503



**PRIVATE RESIDENCE | DÉVÉ CREATIONS** THE NETHERLANDS

DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023

# MATCH on STREX

*48V system* 61 | 137 | 153

193

415 | 509

571

589 | 685

723 | 729

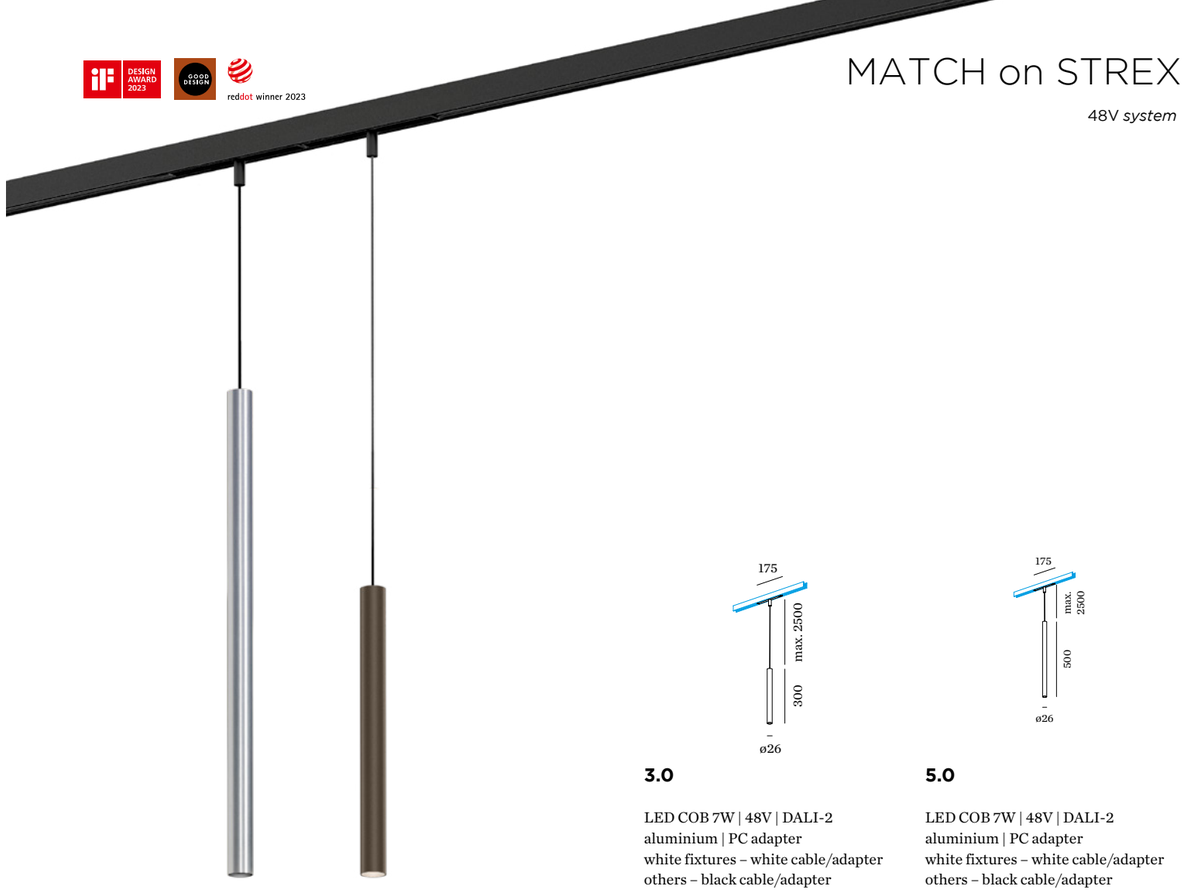







## 3.0

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

| | CHF | CODE |
|---|---|---|
| | 369,85 | 179775W_ |
| | 379,50 | 179775L_ |
| | 379,50 | 179775M_ |
| | 379,50 | 179775Q_ |
| | 369,85 | 179775B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 490 | >90 | 3 |
| 3000K | 520 | >90 | 5 |

## 5.0

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

| | CHF | CODE |
|---|---|---|
| | 387,80 | 179875W_ |
| | 400,20 | 179875L_ |
| | 400,20 | 179875M_ |
| | 400,20 | 179875Q_ |
| | 387,80 | 179875B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 490 | >90 | 3 |
| 3000K | 520 | >90 | 5 |






**MORE VERSIONS ONLINE**
weverducre.com/more-match-on-strex



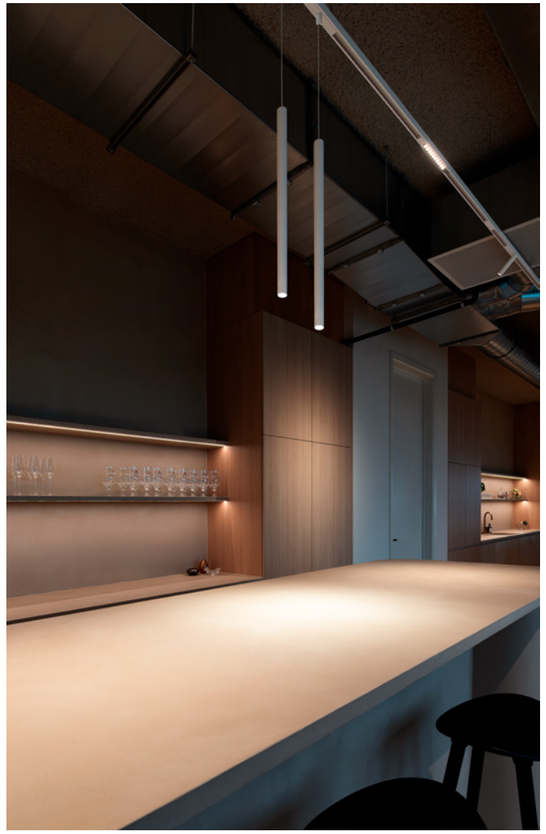

**OFFICE LAMETT** DEERLIJK | BELGIUM



# TRACE on STREX

48V *system*



261 | 269 | 273

511 | 547

593 | 595




## 3.0

LED COB 7W | DALI-2
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

| | CHF | CODE |
|---|---|---|
| | 396,10 | 333875W_ |
| | 405,75 | 333875BL_ |
| | 405,75 | 333875BM_ |
| | 396,10 | 333875B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 490 | >90 | 3 |
| 3000K | 520 | >90 | 5 |




## 5.0

LED COB 7W | DALI-2
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

| | CHF | CODE |
|---|---|---|
| | 408,50 | 333975W_ |
| | 420,90 | 333975BL_ |
| | 420,90 | 333975BM_ |
| | 408,50 | 333975B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 490 | >90 | 3 |
| 3000K | 520 | >90 | 5 |

**MORE VERSIONS ONLINE**
weverducre.com/more-trace-on-strex





**PRIVATE RESIDENCE | TOM LIERMAN BUREAU VOOR ARCHITECTUUR & INTERIEUR** BELGIUM

# ODREY on STREX

*48V system*






























**MORE VERSIONS ONLINE**
weverducre.com/more-odrey-on-strex

## 1.2

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 538,20 | 197265WW_ |
| | 538,20 | 197265QQ_ |
| | 538,20 | 197265BL_ |
| | 538,20 | 197265BG_ |
| | 538,20 | 197265BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 400 | >90 | 3 |
| 3000K | 445 | >90 | 5 |

## 1.4

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 458,20 | 197465WW_ |
| | 458,20 | 197465QQ_ |
| | 458,20 | 197465BL_ |
| | 458,20 | 197465BG_ |
| | 458,20 | 197465BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 470 | >90 | 5 |

## 1.6

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 463,70 | 197665WW_ |
| | 463,70 | 197665QQ_ |
| | 463,70 | 197665BL_ |
| | 463,70 | 197665BG_ |
| | 463,70 | 197665BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 480 | >90 | 3 |
| 3000K | 505 | >90 | 5 |

optional inner cover on page 910

517 | 539

599






**PRIVATE RESIDENCE | WALRAVENS WEETS ARCHITECTEN**
BELGIUM

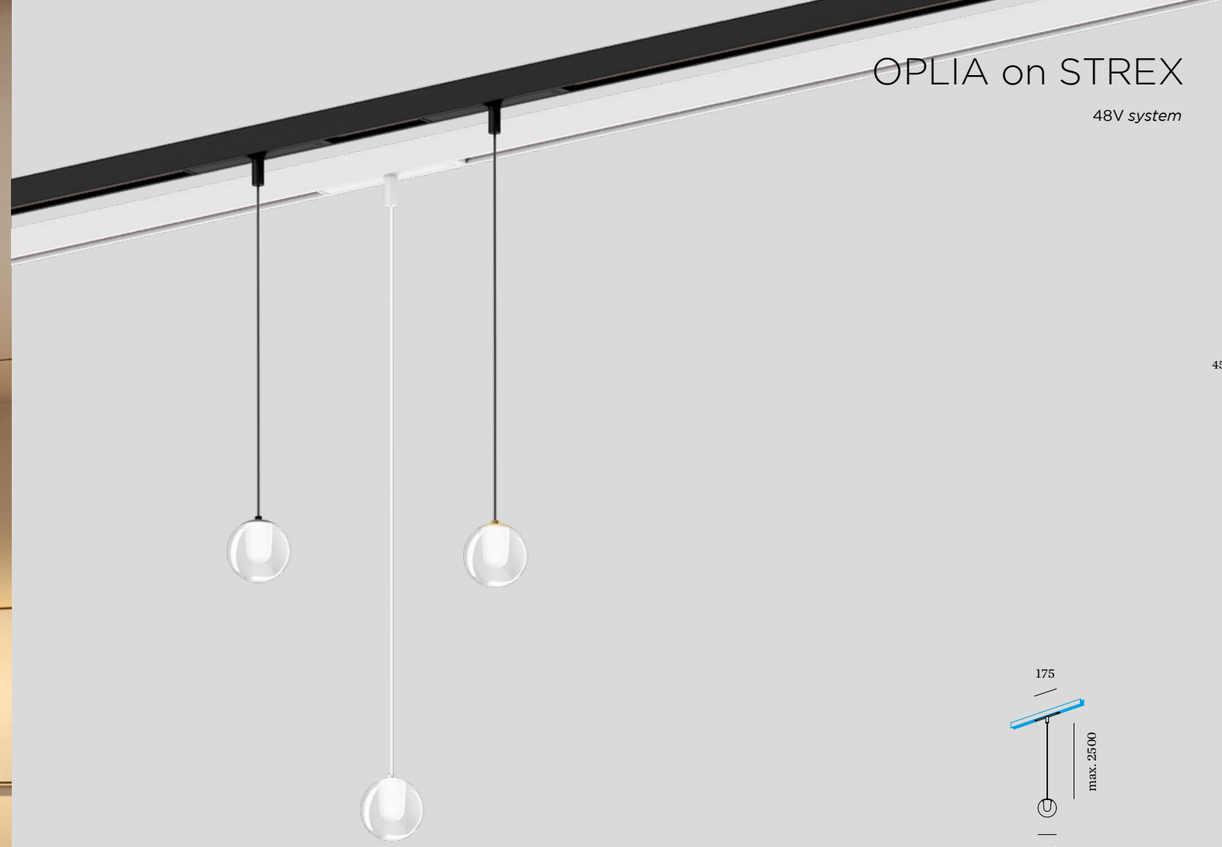

# OPLIA on STREX

*48V system*

457 | 521




## 1.0

LED PCB 5W | 48V | DALI-2
aluminium | glass | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 L80|100K

2700K | CRI >90 | 245lm

| | CHF | CODE |
|---|---|---|
| | 405,75 | 246285W3 |
| | 405,75 | 246285M3 |
| | 405,75 | 246285B3 |





# SOLLI on STREX

*48V system*






## 1.0

LED COB 7W | 48V | DALI-2
aluminium | black cable
artisanal Italian hand blown glass
PC adapter

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 527,20 | 238985FD_ |
| | 527,20 | 238985TD_ |
| | 474,75 | 238985WB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 280 | >90 | 3 |
| 3000K | 290 | >90 | 5 |



## RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq







### TRACK PROFILE

recessed | 220-240V | 16A

| | | CHF | CODE |
|---|---|---|---|
| | 1m | 85,60 | 90014118 |
| ■ | 1m | 85,60 | 90014119 |
| | 2m | 158,70 | 90014120 |
| ■ | 2m | 158,70 | 90014121 |
| | 3m | 209,80 | 90014122 |
| ■ | 3m | 209,80 | 90014123 |




### F | MOUNTING BRACKET

for recessed fixation

34-45 45 4-15

| CHF | CODE |
|---|---|
| 15,90 | 90014100 |

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed




### TRACK PROFILE

surface | suspended | 220-240V | 16A

| | | CHF | CODE |
|---|---|---|---|
| | 1m | 60,75 | 90014001 |
| ■ | 1m | 60,75 | 90014007 |
| | 2m | 121,45 | 90014002 |
| ■ | 2m | 121,45 | 90014008 |
| | 3m | 187,70 | 90014003 |
| ■ | 3m | 187,70 | 90014009 |




### G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

| | | CHF | CODE |
|---|---|---|---|
| | max. 1.5m | 38,65 | 90014101 |
| ■ | max. 1.5m | 38,65 | 90014102 |
| | max. 3m | 45,55 | 90014103 |
| ■ | max. 3m | 45,55 | 90014104 |

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed




### A | END FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

| | | CHF | CODE |
|---|---|---|---|
| | | 21,40 | 90014018 |
| ■ | | 21,40 | 90014019 |




### A | END FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A

| | | CHF | CODE |
|---|---|---|---|
| | | 21,40 | 90014020 |
| ■ | | 21,40 | 90014021 |




### B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

| | | CHF | CODE |
|---|---|---|---|
| | | 51,10 | 90014036 |
| ■ | | 51,10 | 90014037 |




### C | END CAP LEFT/RIGHT

| | | CHF | CODE |
|---|---|---|---|
| | | 4,85 | 90014028 |
| ■ | | 4,85 | 90014029 |




### D | L-FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

| | | CHF | CODE |
|---|---|---|---|
| | | 52,45 | 90014024 |
| ■ | | 52,45 | 90014025 |




### D | L-FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A

| | | CHF | CODE |
|---|---|---|---|
| | | 52,45 | 90014026 |
| ■ | | 52,45 | 90014027 |




### E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

| | | CHF | CODE |
|---|---|---|---|
| | | 19,35 | 90014022 |
| ■ | | 19,35 | 90014023 |




### COVERPLATE END FEED

only use with recessed tracks

| | | CHF | CODE |
|---|---|---|---|
| | | 13,15 | 90014124 |
| ■ | | 13,15 | 90014125 |

more 1-phase track accessories on page 918



# PILLO on track

1-*Phase*








## 1.0

PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0°-90°|350°

| | CHF | CODE |
|---|---|---|
| | 99,40 | 194420W0 |
| | 99,40 | 194420B0 |

## OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 225lm | 20,05 | 901128B3 |
| 3000K \| 235lm | 20,05 | 901128B5 |



**ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS** KNOKKE-HEIST | BELGIUM



# SARA on track

1-*Phase*

203

689







## 1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355° M-34° L70|55K

| | CHF | CODE |
|---|---|---|
| | 218,05 | 157168W_ |
| | 226,35 | 157168G_ |
| | 226,35 | 157168K_ |
| | 218,05 | 157168B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 655 | >80 | 3 |
| 3000K | 700 | >80 | 5 |

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355°

| | CHF | CODE |
|---|---|---|
| | 121,45 | 157120W0 |
| | 129,75 | 157120G0 |
| | 129,75 | 157120K0 |
| | 121,45 | 157120B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



















TRUKIKORA
5
4
3
2
1



**LENDHOTEL | LAM ARCHITEKTUR ZT GMBH** GRAZ | AUSTRIA



# SQUBE on track

1-*Phase*

205







## 1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355° M-39° L70|55K

| | CHF | CODE |
|---|---|---|
| | 241,50 | 144168W_ |
| | 241,50 | 144168B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 415 | >90 | 3 |
| 3000K | 430 | >90 | 5 |
| 1800-3000K | 350 | >90 | 9 |


black ring LED


PAR16

## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355°

| | CHF | CODE |
|---|---|---|
| | 150,45 | 144120W0 |
| | 150,45 | 144120B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905





white fixtures with white adapter
other fixtures with black adapter



# PIRRO on track

*1-Phase*



77



215 | 221 | 223






## 2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

IP20 310° M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 269,10 | 173264E_ |
| | 269,10 | 173264K_ |
| | 269,10 | 173264B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x355 | >90 | 3 |
| 3000K | 2x385 | >90 | 5 |

### OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |




## 4.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

IP20 310° M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 351,90 | 173464E_ |
| | 351,90 | 173464K_ |
| | 351,90 | 173464B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x365 | >90 | 3 |
| 3000K | 4x380 | >90 | 5 |

### OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |




## 2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

IP20 310° L80|60K

| | CHF | CODE |
|---|---|---|
| | 269,10 | 173284E_ |
| | 269,10 | 173284K_ |
| | 269,10 | 173284B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 270 | >90 | 3 |
| 3000K | 280 | >90 | 5 |




## 4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

IP20 310° L80|60K

| | CHF | CODE |
|---|---|---|
| | 351,90 | 173484E_ |
| | 351,90 | 173484K_ |
| | 351,90 | 173484B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 685 | >90 | 3 |
| 3000K | 710 | >90 | 5 |



**URBAN SPACES | STUDIO KOMO** STUTTGART | GERMANY

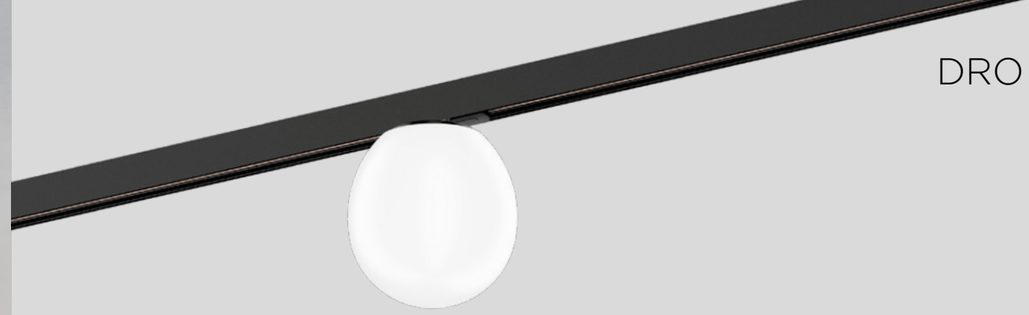

# DRO on track

*1-Phase*

279

465

623

715 | 731




## 1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
1-phase Global® track adapter

IP20

| | CHF | CODE |
|---|---|---|
| | 213,90 | 1724G0WB0 |

## OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 340lm | 24,85 | 9010G803 |
| 3000K \| 350lm | 24,85 | 9010G805 |



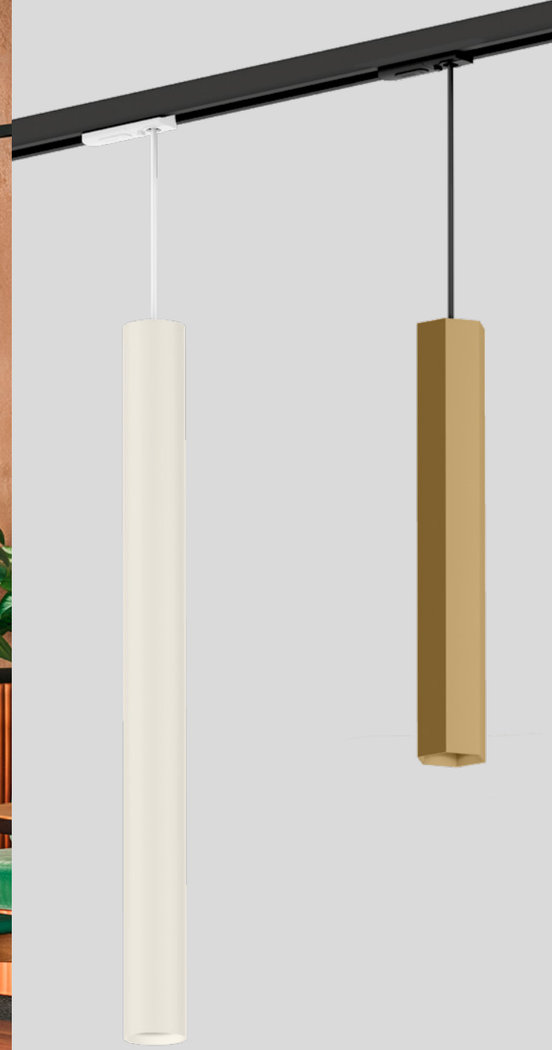

# HEXO mini | RAY mini on track

*1-Phase*

243 | 247
505 | 507
531 | 535
611 | 613




## HEXO MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 190,45 | 259320M0 |
| | 190,45 | 259320Q0 |
| | 190,45 | 259320B0 |

**5.0**

| 500mm | CHF | CODE |
|---|---|---|
| | 218,05 | 259420M0 |
| | 218,05 | 259420Q0 |
| | 218,05 | 259420B0 |

### OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K | 225lm | 20,05 | 901128B3 |
| 3000K | 235lm | 20,05 | 901128B5 |




## RAY MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white and LS – white cable/adapter
others – black cable/adapter

IP20

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 180,80 | 260320W0 |
| | 180,80 | 260320LS0 |
| | 180,80 | 260320Q0 |
| | 180,80 | 260320B0 |

**5.0**

| 500mm | CHF | CODE |
|---|---|---|
| | 208,40 | 260420W0 |
| | 208,40 | 260420LS0 |
| | 208,40 | 260420Q0 |
| | 208,40 | 260420B0 |

### OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K | 240lm | 20,05 | 901128W3 |
| 2700K | 225lm | 20,05 | 901128B3 |
| 3000K | 255lm | 20,05 | 901128W5 |
| 3000K | 235lm | 20,05 | 901128B5 |



OFFICE THE HOUSE | SPACELAB ARKITEKTER COPENHAGEN | DENMARK

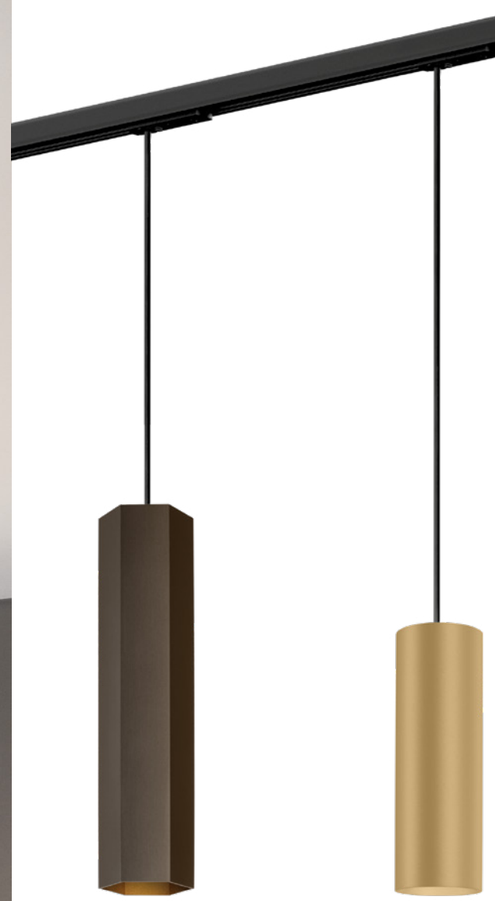

# HEXO | RAY on track

*1-Phase*







## HEXO 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 167,00 | 215620G0 |
| | 167,00 | 215620Q0 |
| | 167,00 | 215620P0 |
| | 164,25 | 215620B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

**2.0**

| 200mm | CHF | CODE |
|---|---|---|
| | 140,80 | 217520W0 |
| | 150,45 | 217520G0 |
| | 150,45 | 217520M0 |
| | 150,45 | 217520Q0 |
| | 150,45 | 217520P0 |
| | 140,80 | 217520B0 |

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 149,05 | 217620W0 |
| | 158,70 | 217620G0 |
| | 158,70 | 217620M0 |
| | 158,70 | 217620Q0 |
| | 158,70 | 217620P0 |
| | 149,05 | 217620B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

245 | 251
533 | 537
615
759
805



**PRIVATE RESIDENCE | BRITTE MARCUS** BELGIUM

# ODREY on track

*1-Phase*












517 | 539

599

## 1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

| | CHF | CODE |
|---|---|---|
| | 212,55 | 187120WW0 |
| | 212,55 | 187120GG0 |
| | 212,55 | 187120QQ0 |
| | 212,55 | 187120BL0 |
| | 212,55 | 187120BG0 |
| | 212,55 | 187120BB0 |

## 1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

| | CHF | CODE |
|---|---|---|
| | 303,60 | 187220WW0 |
| | 303,60 | 187220GG0 |
| | 303,60 | 187220QQ0 |
| | 303,60 | 187220BL0 |
| | 303,60 | 187220BG0 |
| | 303,60 | 187220BB0 |

## 1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

| | CHF | CODE |
|---|---|---|
| | 213,90 | 187320WW0 |
| | 213,90 | 187320GG0 |
| | 213,90 | 187320QQ0 |
| | 213,90 | 187320BL0 |
| | 213,90 | 187320BG0 |
| | 213,90 | 187320BB0 |




## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**SHOWROOM GRANDO KEUKENS** BELGIUM

# ODREY on track

*1-Phase*












517 | 539

599

## 1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

| | CHF | CODE |
|---|---|---|
| | 223,60 | 187420WW0 |
| | 223,60 | 187420GG0 |
| | 223,60 | 187420QQ0 |
| | 223,60 | 187420BL0 |
| | 223,60 | 187420BG0 |
| | 223,60 | 187420BB0 |

## 1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

| | CHF | CODE |
|---|---|---|
| | 227,70 | 187520WW0 |
| | 227,70 | 187520GG0 |
| | 227,70 | 187520QQ0 |
| | 227,70 | 187520BL0 |
| | 227,70 | 187520BG0 |
| | 227,70 | 187520BB0 |

## 1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

| | CHF | CODE |
|---|---|---|
| | 229,10 | 187620WW0 |
| | 229,10 | 187620GG0 |
| | 229,10 | 187620QQ0 |
| | 229,10 | 187620BL0 |
| | 229,10 | 187620BG0 |
| | 229,10 | 187620BB0 |

optional inner cover on page 910



















## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905





# RUVI on track

*1-Phase*






## 1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

| | CHF | CODE |
|---|---|---|
| | 135,25 | 1672E0W0 |
| | 135,25 | 1672E0M0 |
| | 135,25 | 1672E0Q0 |
| | 135,25 | 1672E0B0 |

## OPTIONAL

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |





## SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

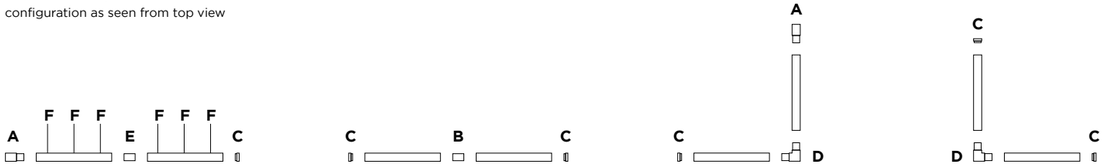





## TRACK PROFILE

surface | suspended | DALI
220-240V | 16A

DALI FELV

| | | CHF | CODE |
|---|---|---|---|
| | 1m | 67,65 | 90014200 |
| | 1m | 67,65 | 90014201 |
| | 2m | 133,90 | 90014202 |
| | 2m | 133,90 | 90014203 |
| | 3m | 202,90 | 90014204 |
| | 3m | 202,90 | 90014205 |




## F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

| | | CHF | CODE |
|---|---|---|---|
| | max. 1.5m | 40,05 | 90014206 |
| | max. 1.5m | 40,05 | 90014207 |
| | max. 3m | 41,40 | 90014208 |
| | max. 3m | 41,40 | 90014209 |

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed

top view




## A | END FEED 1.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

| | CHF | CODE |
|---|---|---|
| | 31,75 | 90014240 |
| | 31,75 | 90014241 |

top view




## A | END FEED 2.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

| | CHF | CODE |
|---|---|---|
| | 31,75 | 90014238 |
| | 31,75 | 90014239 |

top view




## B | MIDDLE FEED

straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

| | CHF | CODE |
|---|---|---|
| | 70,40 | 90014224 |
| | 70,40 | 90014225 |




## C | END CAP LEFT/RIGHT

| | | CHF | CODE |
|---|---|---|---|
| | | 4,15 | 90014216 |
| | | 4,15 | 90014217 |

top view




## D | L-FEED 1.0

220-240V | max. 7 x 1.5-2.5mm² | 16A

| | CHF | CODE |
|---|---|---|
| | 66,25 | 90014220 |
| | 66,25 | 90014221 |

top view




## D | L-FEED 2.0

220-240V | max. 7 x 1.5-2.5mm² | 16A

| | CHF | CODE |
|---|---|---|
| | 66,25 | 90014222 |
| | 66,25 | 90014223 |

top view




## E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

| | CHF | CODE |
|---|---|---|
| | 22,10 | 90014226 |
| | 22,10 | 90014227 |




## TRACK COVER

| | | CHF | CODE |
|---|---|---|---|
| | 1m | 40,05 | 90014236 |
| | 1m | 40,05 | 90014237 |

more 3-phase track accessories on page 919



# LIKO on track

*3-Phase*

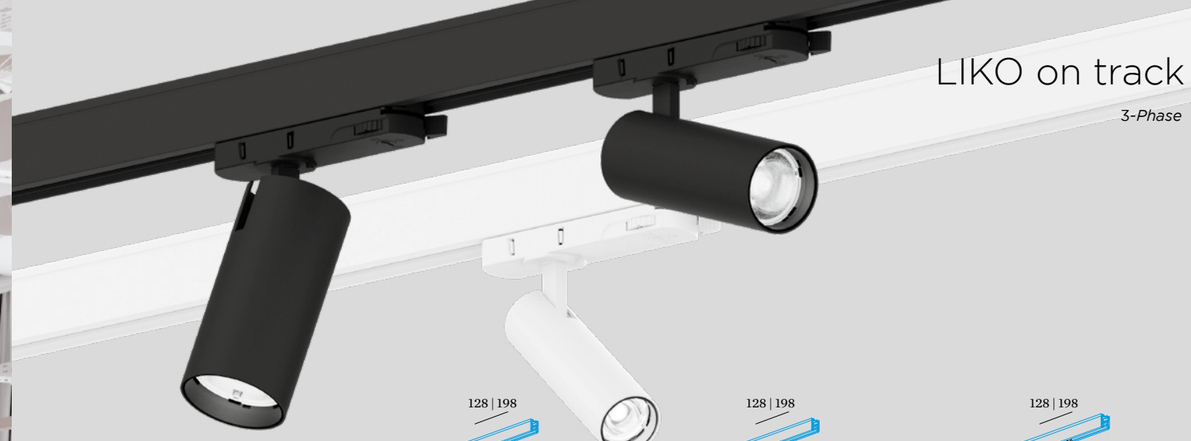










## 1.0

LED COB 12W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|360° M-30° L80|50K

non-dim

| | CHF | CODE |
|---|---|---|
| | 190,45 | 263152W_ |
| | 190,45 | 263152B_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 241,50 | 263155W_ |
| | 241,50 | 263155B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1070 | >90 | 3 |
| 3000K | 1110 | >90 | 5 |

### OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915231B0 |

## 2.0

LED COB 14W | ≤115lm/W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|360° M-27° L80|50K

non-dim

| | CHF | CODE |
|---|---|---|
| | 218,05 | 263252W_ |
| | 218,05 | 263252B_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 269,10 | 263255W_ |
| | 269,10 | 263255B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1565 | >90 | 3 |
| 3000K | 1600 | >90 | 5 |

### OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 22,10 | 915232B0 |

## 3.0

LED COB 18W | ≤120lm/W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|360° M-27° L80|50K

non-dim

| | CHF | CODE |
|---|---|---|
| | 241,50 | 263352W_ |
| | 241,50 | 263352B_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 282,90 | 263355W_ |
| | 282,90 | 263355B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2110 | >90 | 3 |
| 3000K | 2175 | >90 | 5 |

### OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 24,15 | 915233B0 |

≤120lm/W

**MORE VERSIONS ONLINE**
weverducre.com/more-liko

LAMP-CONCEPT.CH

back



**AOK OFFICE | DESIGNFUNKTION** BERLIN | GERMANY

# SQUBE on track

*3-Phase*















## 1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|355°

| | CHF | CODE |
|---|---|---|
| | 150,45 | 144720W0 |
| | 150,45 | 144720B0 |

## 2.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|355° M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 295,35 | 144368W_ |
| | 295,35 | 144368B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 925 | >90 | 3 |
| 3000K | 960 | >90 | 5 |
| 1800K-3000K | 645 | >90 | 9 |

## 3.0 LED

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|355° M-27° L70|55K

| | CHF | CODE |
|---|---|---|
| | 314,65 | 144558W_ |
| | 314,65 | 144558B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1400 | >90 | 3 |
| 3000K | 1480 | >90 | 5 |







## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



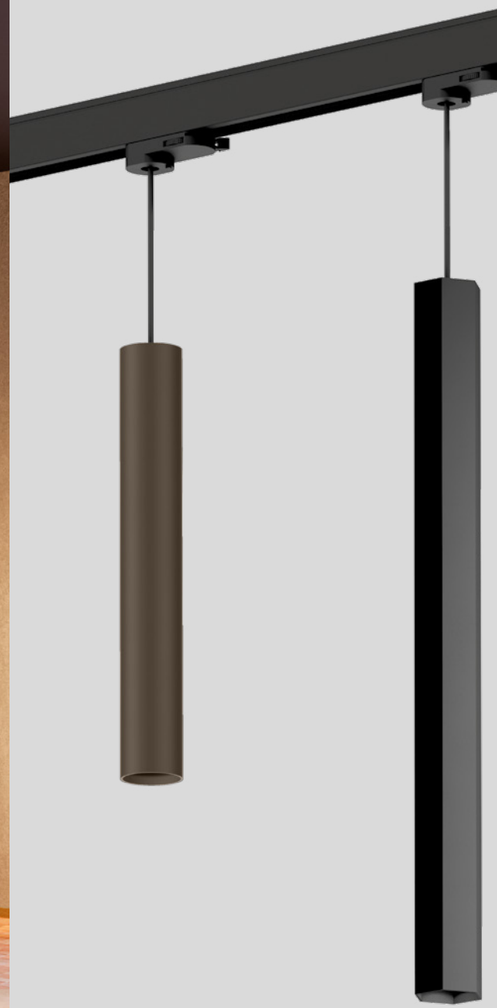

# HEXO mini | RAY mini on track

*3-Phase*

243 | 247
505 | 507
531 | 535
611 | 613




## HEXO MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 190,45 | 259520M0 |
| | 190,45 | 259520Q0 |
| | 190,45 | 259520B0 |

**5.0**

| 500mm | CHF | CODE |
|---|---|---|
| | 218,05 | 259620M0 |
| | 218,05 | 259620Q0 |
| | 218,05 | 259620B0 |

## OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 225lm | 20,05 | 901128B3 |
| 3000K \| 235lm | 20,05 | 901128B5 |




## RAY MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
3-phase track adapter
W and LS – white cable/adapter
others – black cable/adapter

IP20

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 180,80 | 260520W0 |
| | 180,80 | 260520LS0 |
| | 180,80 | 260520Q0 |
| | 180,80 | 260520B0 |

**5.0**

| 500mm | CHF | CODE |
|---|---|---|
| | 208,40 | 260620W0 |
| | 208,40 | 260620LS0 |
| | 208,40 | 260620Q0 |
| | 208,40 | 260620B0 |

## OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 240lm | 20,05 | 901128W3 |
| 2700K \| 225lm | 20,05 | 901128B3 |
| 3000K \| 255lm | 20,05 | 901128W5 |
| 3000K \| 235lm | 20,05 | 901128B5 |



PRIVATE RESIDENCE | INTERNI 21.11 ITALY



# HEXO | RAY on track

*3-Phase*




## HEXO 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 167,00 | 215420G0 |
| | 167,00 | 215420Q0 |
| | 167,00 | 215420P0 |
| | 164,25 | 215420B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905




## RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter
W fixtures – white cable/adapter
others – black cable/adapter

IP20

**2.0**

| 200mm | CHF | CODE |
|---|---|---|
| | 140,80 | 217320W0 |
| | 150,45 | 217320G0 |
| | 150,45 | 217320M0 |
| | 150,45 | 217320Q0 |
| | 150,45 | 217320P0 |
| | 140,80 | 217320B0 |

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 149,05 | 217420W0 |
| | 158,70 | 217420G0 |
| | 158,70 | 217420M0 |
| | 158,70 | 217420Q0 |
| | 158,70 | 217420P0 |
| | 149,05 | 217420B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

245 | 251
533 | 537
615
759
805



**DIN** SONNBERG IM MÜHLKREIS | AUSTRIA



# ROOMOR OFFICE on track

*3-Phase*

293

499







## 1.0 MICROPRISMATIC

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium
microprismatic PMMA cover
3-phase track adapter incl. driver

IP20 L80|60K UGR ≤ 19

| | CHF | CODE |
|---|---|---|
| | 1028,10 | 1684M5W_ |
| | 1028,10 | 1684M5B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 3660 | >90 | 5 |
| 4000K | 3660 | >90 | 7 |

## 1.0 OPAL

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium | opal PMMA cover
3-phase track adapter incl. driver

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 1000,50 | 168485W_ |
| | 1000,50 | 168485B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 3700 | >90 | 5 |
| 4000K | 3700 | >90 | 7 |



# QUBBY SYSTEM

*Ceiling* suspended



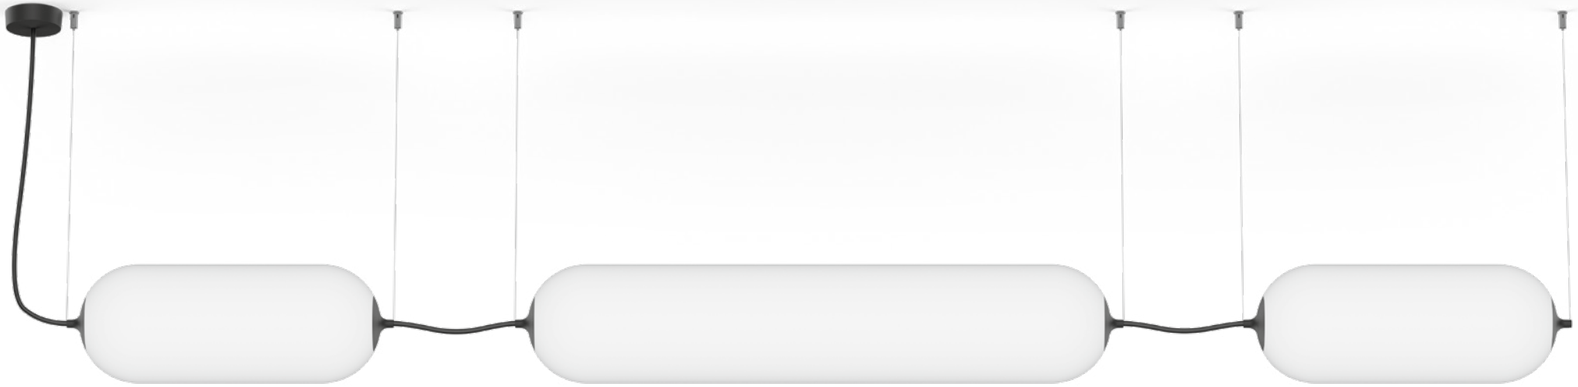










## 1.0

LED PCB 16W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 1250lm

| | CHF | CODE |
|---|---|---|
| | 959,10 | 916215B9 |

## 2.0

LED PCB 22W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 2500lm

| | CHF | CODE |
|---|---|---|
| | 1290,30 | 916225B9 |

## 3.0

LED PCB 35W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 4500lm

| | CHF | CODE |
|---|---|---|
| | 2063,10 | 916235B9 |

## B | BASE

W/H ø97x28
polypropylene

| | CHF | CODE |
|---|---|---|
| | 62,10 | 914231B0 |

## CONNECTOR

included in **1.0 | 2.0 | 3.0**

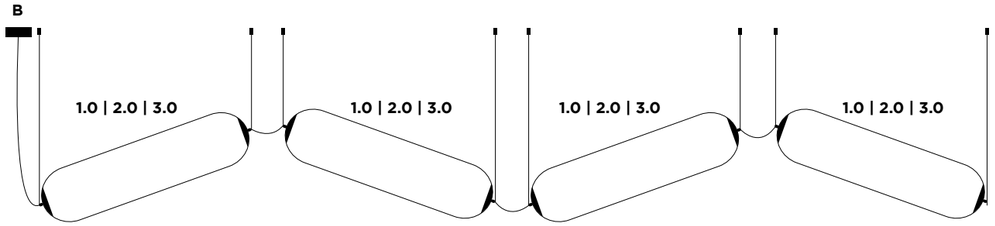


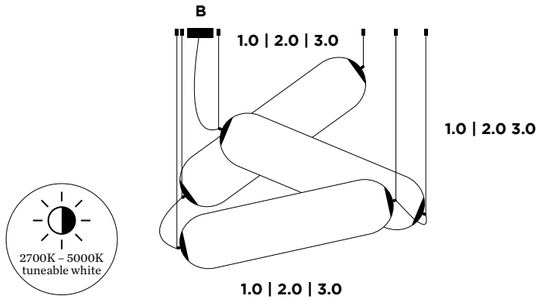


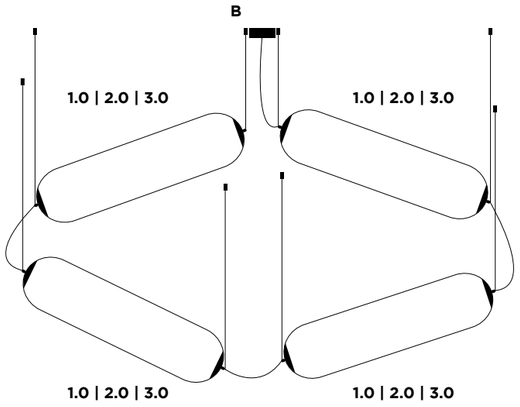


**1.0 | 2.0 | 3.0** Luminaire
**B** Base

### KEEP IN MIND WHEN PLANNING YOUR SYSTEM

Please be aware that the maximum length of the QUBBY System cannot be longer then 80m or max. 40 luminaires.

SEE CONNECTORS

LAMP-CONCEPT.CH

back



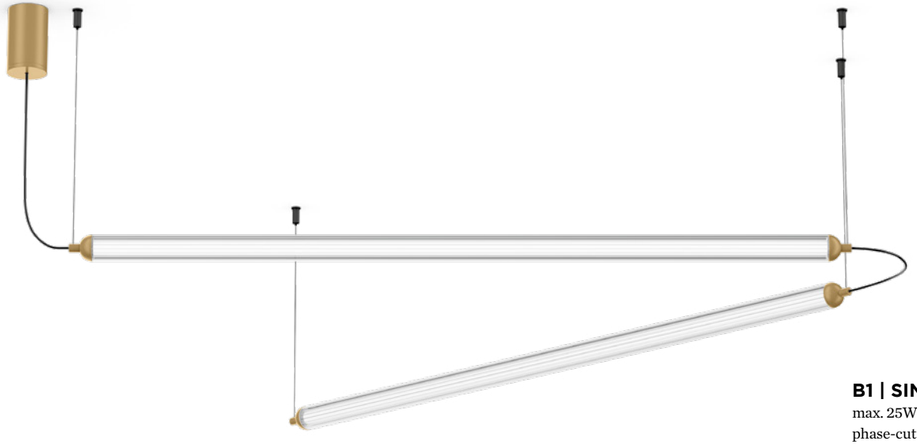










## 1.0

LED strip 8W
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 386,40 | 269182M_ |
| | 386,40 | 269182B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1035 | >90 | 3 |
| 3000K | 1065 | >90 | 5 |

## 2.0

LED strip 12W
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 469,20 | 269282M_ |
| | 469,20 | 269282B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1555 | >90 | 3 |
| 3000K | 1600 | >90 | 5 |

## 3.0

LED strip 15W
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 565,80 | 269382M_ |
| | 565,80 | 269382B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2070 | >90 | 3 |
| 3000K | 2130 | >90 | 5 |

## B1 | SINGLE/MULTI BASE

max. 25W | const. volt. | 24V
phase-cut dim | W/H ø62x102
polycarbonate

| | CHF | CODE |
|---|---|---|
| | 75,90 | 914224M0 |
| | 75,90 | 914224B0 |

## B2 | MULTI BASE

max. 50W | const. volt. | 24V
phase-cut dim | W/H ø200x38
polycarbonate

| | CHF | CODE |
|---|---|---|
| | 103,50 | 914225M0 |
| | 103,50 | 914225B0 |

## C | CABLE CONNECTOR

cable from one luminaire to another
incl. plugs

| | | CHF | CODE |
|---|---|---|---|
| | 0.3m | 20,05 | 915210B0 |
| | 0.6m | 26,25 | 915211B0 |
| | 0.9m | 31,75 | 915212B0 |
| | 1.2m | 37,30 | 915213B0 |

## D | FIX CONNECTOR

electrical | mechanical | straight
central suspension

| | CHF | CODE |
|---|---|---|
| | 33,15 | 915221B0 |

# FLYRA SYSTEM

*Ceiling* suspended

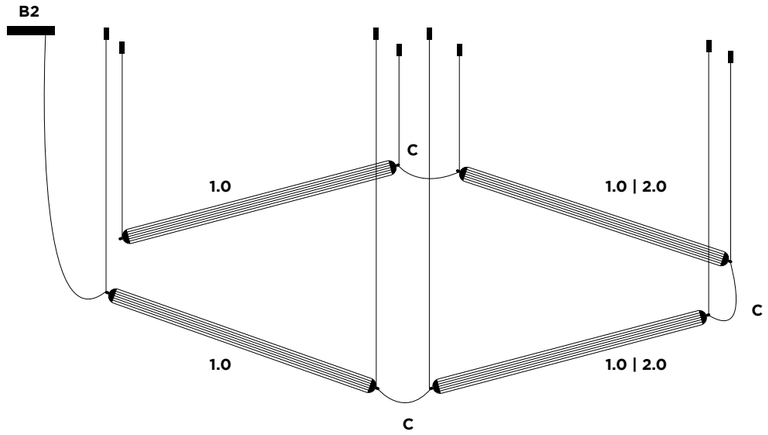


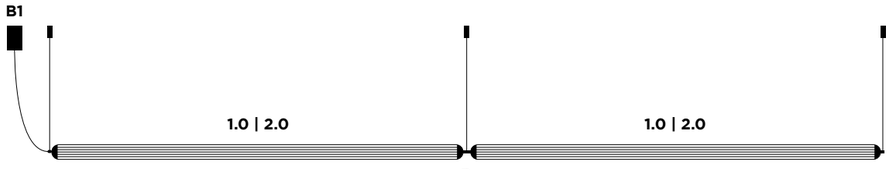


| | |
|---|---|
| **1.0 \| 2.0 \| 3.0** | Luminaire |
| **B1** | Single/Multi Base |
| **B2** | Multi Base |
| **C** | Cable connector |
| **D** | Fix connector |

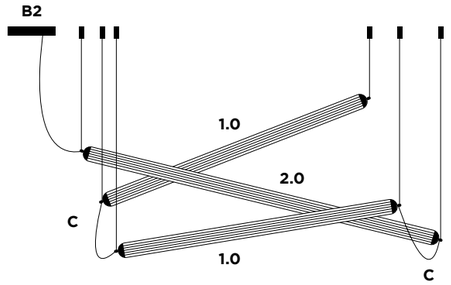


### KEEP IN MIND WHEN PLANNING YOUR SYSTEM

Please be aware that the maximum wattage of the FLYRA System cannot be higher than 25W for B1 and 50W for B2 per System.

weverducre.com/flyra








## 1.0

LED PCB | dimmable
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP20 L80|50K



phase-cut dim | 20W
3000K | CRI >90 | 1090lm

| | CHF | CODE |
|---|---|---|
| | 499,60 | 500384W5 |
| | 499,60 | 500384B5 |

DALI-2 | 22W | incl. driver
3000K | CRI >90 | 1090lm

| | CHF | CODE |
|---|---|---|
| | 568,60 | 500385W5 |
| | 568,60 | 500385B5 |

## B | CONNECTOR POINT

phase-cut dim up to max. 4 fixtures
DALI up to max. 2 fixtures

| | CHF | CODE |
|---|---|---|
| | 71,80 | 900190W1 |
| | 71,80 | 900190B1 |

## C | STEEL SUSPENSION CABLE

| | CHF | CODE |
|---|---|---|
| 2.0m | 17,95 | 90015102 |

## D1 | POWER FEEDER

for phase-cut dim | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

| | CHF | CODE |
|---|---|---|
| | 85,60 | 90018010 |
| | 85,60 | 90018011 |

## D2 | POWER FEEDER

for DALI | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

| | CHF | CODE |
|---|---|---|
| | 107,65 | 90018012 |
| | 107,65 | 90018013 |

## SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°

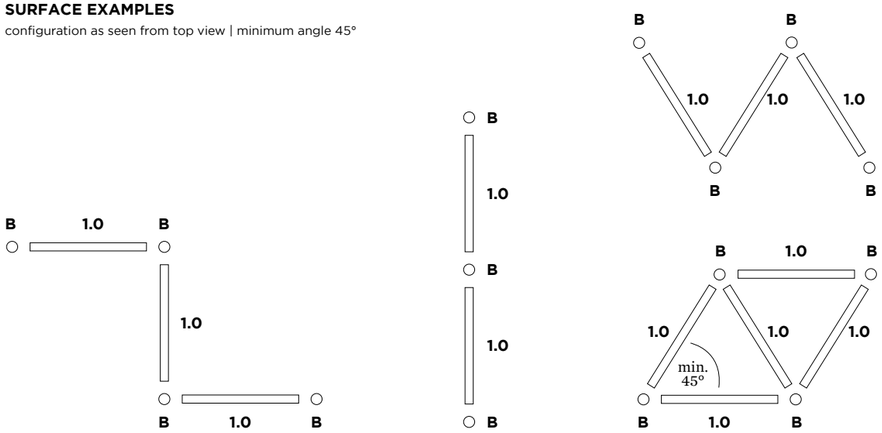


## SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect)

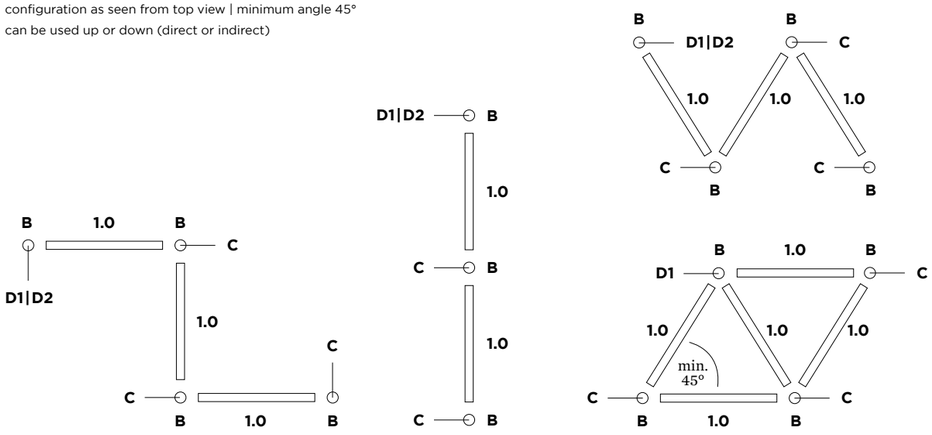

OFFICE KR PROPERTIES | 2A ARCHITECURAL GROUP

LAMP-CONCEPT.CH

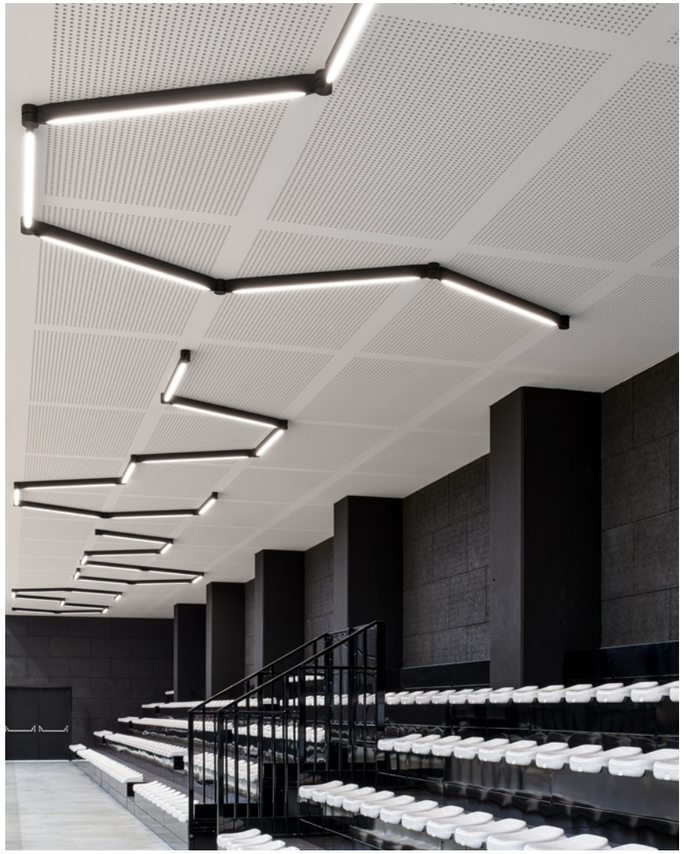

**MATE SPORT HALL | IBL LIGHT & DESIGN** THIENE | ITALY



**PRIVATE RESIDENCE** AUSTRIA

# ILANE

*Ceiling* surface

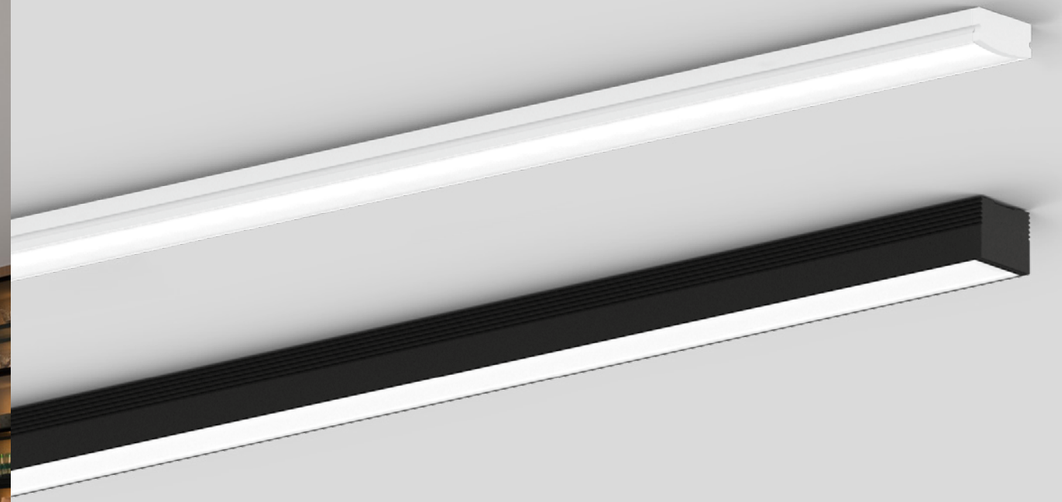







for net output of LED strip on profiles, check weverducre.com/ilane

## OPTIONAL

Black diffuser | only for 1.0

| | CHF | CODE |
|---|---|---|
| 2m | 19,35 | 911902B1 |
| 3m | 29,00 | 911903B1 |

Double side tape for profile fixation

| | CHF | CODE |
|---|---|---|
| 3m | 21,40 | 90019199 |

more accessories on page 916

## 1.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips




| | | CHF | CODE |
|---|---|---|---|
| | 2m | 40,05 | 911991W2 |
| | 2m | 40,05 | 911991B2 |
| | 3m | 63,50 | 911991W3 |
| | 3m | 63,50 | 911991B3 |

### ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

| | CHF | CODE |
|---|---|---|
| 20W \| 2m | 53,15 | 9003S21_ |
| 30W \| 3m | 78,70 | 9003S31_ |
| 50W \| 5m | 132,50 | 9003S41_ |

LED COB strip 24V | IP20
15W/m | 1250lm/m

| | CHF | CODE |
|---|---|---|
| 30W \| 2m | 78,70 | 9003S22_ |
| 45W \| 3m | 106,30 | 9003S32_ |
| 75W \| 5m | 186,30 | 9003S42_ |

| LIGHT COLOUR | CRI | CODE |
|---|---|---|
| 2700K | >90 | 3 |
| 3000K | >90 | 5 |

driver | 24V

| | CHF | CODE |
|---|---|---|
| 35W | 58,00 | 90212801 |
| 100W | 101,85 | 90212902 |
| 25W dim | 63,50 | 90222701 |
| 50W dim | 93,85 | 90222901 |

specs on page 901

## 2.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips




| | | CHF | CODE |
|---|---|---|---|
| | 2m | 60,75 | 911992W2 |
| | 2m | 60,75 | 911992B2 |
| | 3m | 85,60 | 911992W3 |
| | 3m | 85,60 | 911992B3 |

### ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

| | CHF | CODE |
|---|---|---|
| 20W \| 2m | 53,15 | 9003S21_ |
| 30W \| 3m | 78,70 | 9003S31_ |
| 50W \| 5m | 132,50 | 9003S41_ |

LED COB strip 24V | IP20
15W/m | 1250lm/m

| | CHF | CODE |
|---|---|---|
| 30W \| 2m | 78,70 | 9003S22_ |
| 45W \| 3m | 106,30 | 9003S32_ |
| 75W \| 5m | 186,30 | 9003S42_ |

| LIGHT COLOUR | CRI | CODE |
|---|---|---|
| 2700K | >90 | 3 |
| 3000K | >90 | 5 |

driver | 24V

| | CHF | CODE |
|---|---|---|
| 35W | 58,00 | 90212801 |
| 100W | 101,85 | 90212902 |
| 25W dim | 63,50 | 90222701 |
| 50W dim | 93,85 | 90222901 |

specs on page 901



**PRIVATE RESIDENCE** SPAIN

# ILANE

*Ceiling* surface / recessed

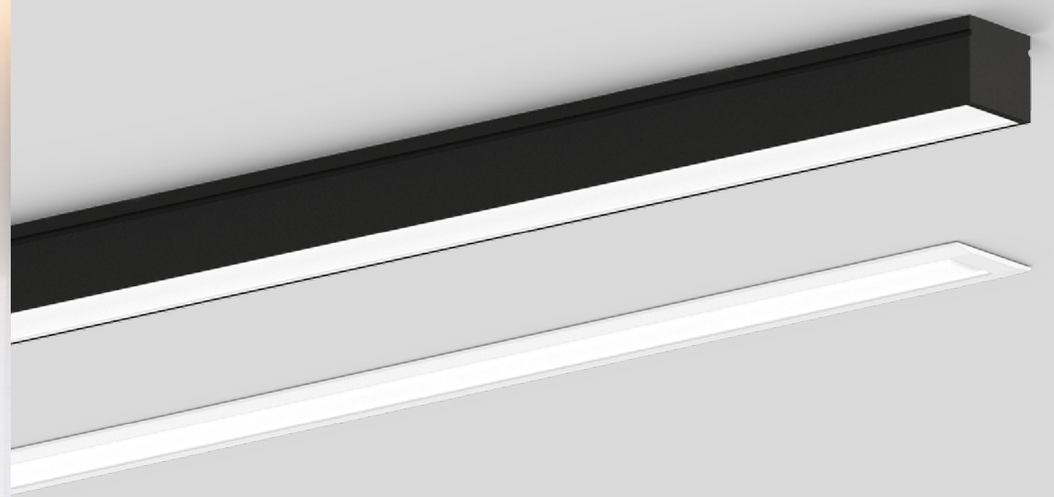




for net output of LED strip on profiles, check weverducre.com/ilane

## 3.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips




| | | CHF | CODE |
|---|---|---|---|
| | 2m | 63,50 | 911993W2 |
| | 2m | 63,50 | 911993B2 |
| | 3m | 92,50 | 911993W3 |
| | 3m | 92,50 | 911993B3 |

## 4.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips




| | | CHF | CODE |
|---|---|---|---|
| | 2m | 80,05 | 911994W2 |
| | 2m | 80,05 | 911994B2 |
| | 3m | 104,90 | 911994W3 |
| | 3m | 104,90 | 911994B3 |

## ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

| | CHF | CODE |
|---|---|---|
| 20W \| 2m | 53,15 | 9003S21_ |
| 30W \| 3m | 78,70 | 9003S31_ |
| 50W \| 5m | 132,50 | 9003S41_ |

LED COB strip 24V | IP20
15W/m | 1250lm/m

| | CHF | CODE |
|---|---|---|
| 30W \| 2m | 78,70 | 9003S22_ |
| 45W \| 3m | 106,30 | 9003S32_ |
| 75W \| 5m | 186,30 | 9003S42_ |

| LIGHT COLOUR | CRI | CODE |
|---|---|---|
| 2700K | >90 | 3 |
| 3000K | >90 | 5 |

driver | 24V

| | CHF | CODE |
|---|---|---|
| 35W | 58,00 | 90212801 |
| 100W | 101,85 | 90212902 |
| 25W dim | 63,50 | 90222701 |
| 50W dim | 93,85 | 90222901 |

specs on page 901

## ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

| | CHF | CODE |
|---|---|---|
| 20W \| 2m | 53,15 | 9003S21_ |
| 30W \| 3m | 78,70 | 9003S31_ |
| 50W \| 5m | 132,50 | 9003S41_ |

LED COB strip 24V | IP20
15W/m | 1250lm/m

| | CHF | CODE |
|---|---|---|
| 30W \| 2m | 78,70 | 9003S22_ |
| 45W \| 3m | 106,30 | 9003S32_ |
| 75W \| 5m | 186,30 | 9003S42_ |

| LIGHT COLOUR | CRI | CODE |
|---|---|---|
| 2700K | >90 | 3 |
| 3000K | >90 | 5 |

driver | 24V

| | CHF | CODE |
|---|---|---|
| 35W | 58,00 | 90212801 |
| 100W | 101,85 | 90212902 |
| 25W dim | 63,50 | 90222701 |
| 50W dim | 93,85 | 90222901 |

specs on page 901

## OPTIONAL

Black diffuser | only for 3.0

| | CHF | CODE |
|---|---|---|
| 2m | 23,50 | 911912B1 |
| 3m | 31,75 | 911913B1 |

Double side tape for profile fixation

| | CHF | CODE |
|---|---|---|
| 3m | 21,40 | 90019199 |

more accessories on page 916

# *Ceiling* suspended

412 – 565

## SINGLE LUMINAIRES



MATCH LUSTA
415



TRACE CHANDELIER
417



NET
421



FINELLE
423



FLYRA
427



FINLIN
433



STUDO
437



FIL
441



DARF
445



SHEDDA
449



SHEDDA FRACTAL
451



KUJO
453



OPLIA CHANDELIER
457



QUBBY
459



GIGANT
461

## SINGLE SUSPEN-SIONS



CONE
463



DRO
465



MIRRO
467



MIRRO SOFT
471



SPIRRA SOFT
475



WAVE SOFT
477



J.J.W.
479



WIRO
489



ROOMOR
495



ROOMOR OFFICE
499

## CHOOSE YOUR BASE

LV more infos
on p. 500



COZY CONE
503



HEXO MINI
505



RAY MINI
507



MATCH
509



TRACE
511



ODREY
517



OPLIA
521



SOLLI
523



SOLLI COCOON
525

## CHOOSE YOUR BASE

HV more infos
on p. 528



HEXO MINI
531



HEXO
533



RAY MINI
535



RAY
537



ODREY
539



TRACE 2.0
547



WETRO
549



CLEA
557



SHIEK
561



DINOR
563



# MATCH LUSTA

*Ceiling* suspended

61 | 137 | 153
193
329 | 347
571
589 | 685
723 | 729

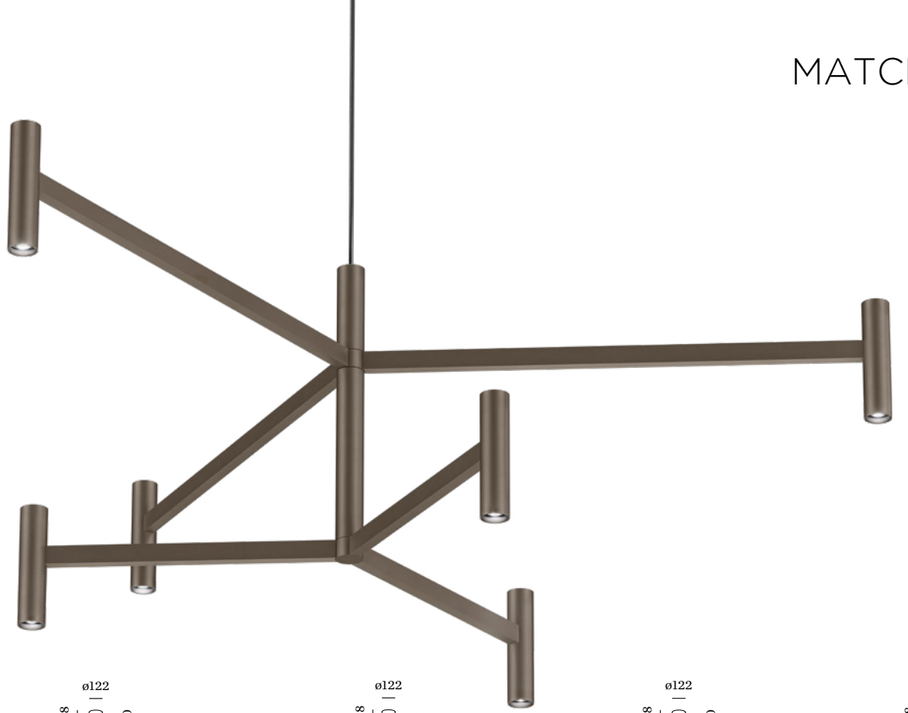













## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

2700K | CRI >90 | 3x240lm

| | CHF | CODE |
|---|---|---|
| | 703,80 | 280154M3 |
| | 703,80 | 280154Q3 |
| | 669,30 | 280154B3 |

## 2.1

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

2700K | CRI >90 | 6x240lm

| | CHF | CODE |
|---|---|---|
| | 1138,50 | 280254M3 |
| | 1138,50 | 280254Q3 |
| | 1090,20 | 280254B3 |

## 3.2

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30°L80|50K

2700K | CRI >90 | 6x240lm

| | CHF | CODE |
|---|---|---|
| | 1228,20 | 280354M3 |
| | 1228,20 | 280354Q3 |
| | 1166,10 | 280354B3 |

## 3.2.1

LED COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

2700K | CRI >90 | 9x240lm

| | CHF | CODE |
|---|---|---|
| | 1711,20 | 280454M3 |
| | 1711,20 | 280454Q3 |
| | 1587,00 | 280454B3 |



**PRIVATE RESIDENCE | RARDO ARCHITECTS** SPAIN

DESIGN AWARD 2024

reddot winner 2023

# TRACE CHANDELIER

*Ceiling* suspended

261 | 269 | 273

351

593 | 595

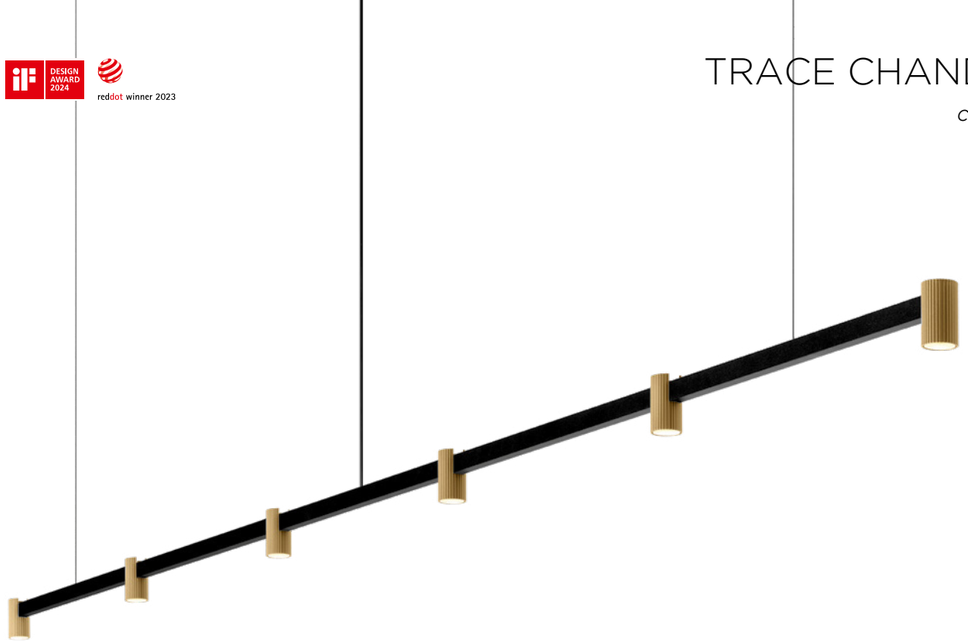










## 1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

| | CHF | CODE |
|---|---|---|
| | 683,10 | 253564CH_ |
| | 683,10 | 253564B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x170 | >90 | 3 |
| 3000K | 4x180 | >90 | 5 |

## 2.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

| | CHF | CODE |
|---|---|---|
| | 917,70 | 253664CH_ |
| | 917,70 | 253664B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 6x180 | >90 | 3 |
| 3000K | 6x190 | >90 | 5 |

## 3.0

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

| | CHF | CODE |
|---|---|---|
| | 1138,50 | 253764CH_ |
| | 1138,50 | 253764B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 8x215 | >90 | 3 |
| 3000K | 8x225 | >90 | 5 |



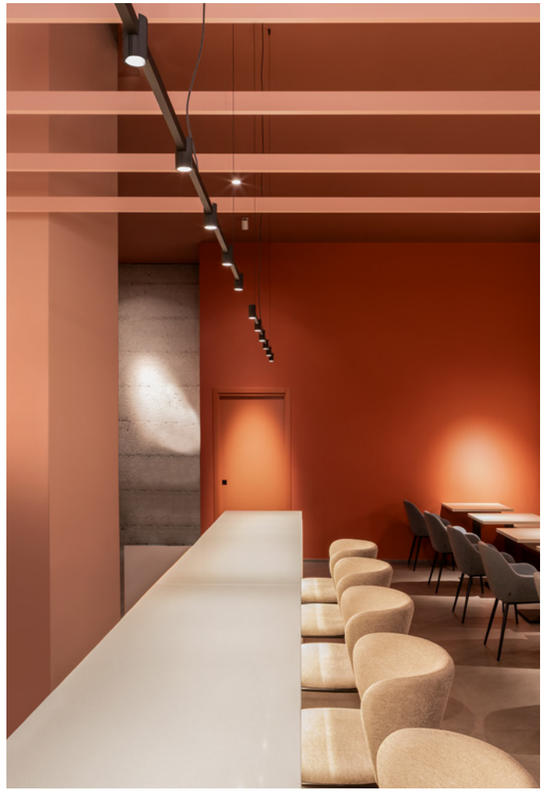

**RESTAURANT L'APERICENA TIME | ARCH. LEONARDO PORCELLI – STILEMI** RIVAROLO CANAVESE | ITALY



PRIVATE RESIDENCE | SOFIE CHRISTIAENS BELGIUM

# NET

*Ceiling* suspended

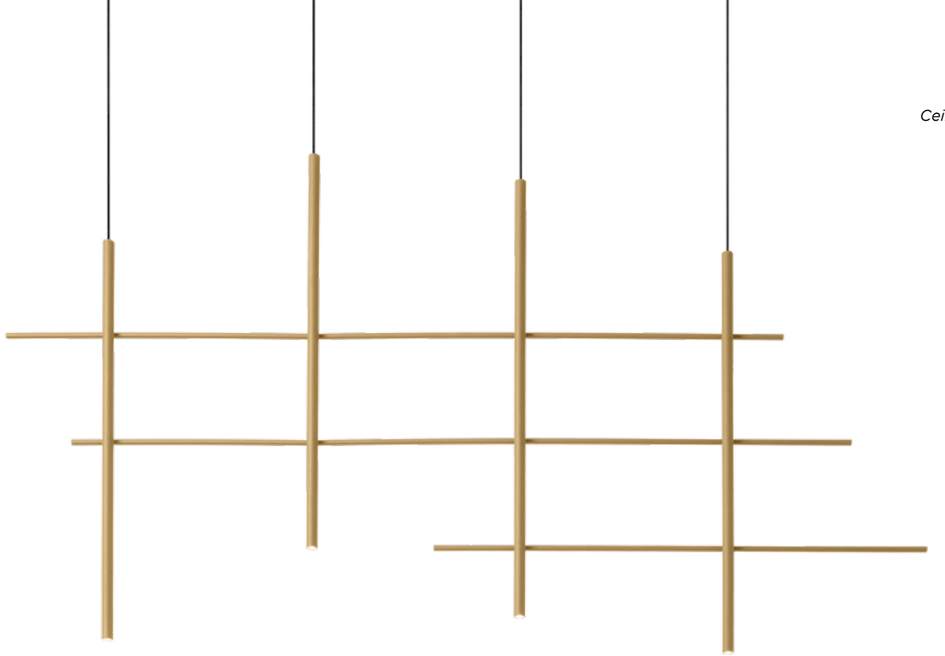




## 2.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 W-85° L80|50K

2700K | CRI >90 | 2x235lm

| | CHF | CODE |
|---|---|---|
| | 641,70 | 231264W3 |
| | 641,70 | 231264M3 |
| | 641,70 | 231264B3 |




## 4.0

LED PCB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 W-85° L80|50K

2700K | CRI >90 | 4x235lm

| | CHF | CODE |
|---|---|---|
| | 1228,20 | 231464W3 |
| | 1228,20 | 231464M3 |
| | 1228,20 | 231464B3 |

# FINELLE

*Ceiling* suspended






**1.0**

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|100K

2700K | CRI >90 | 1040lm

| | CHF | CODE |
|---|---|---|
| | 683,10 | 272184M3 |
| | 683,10 | 272184B3 |



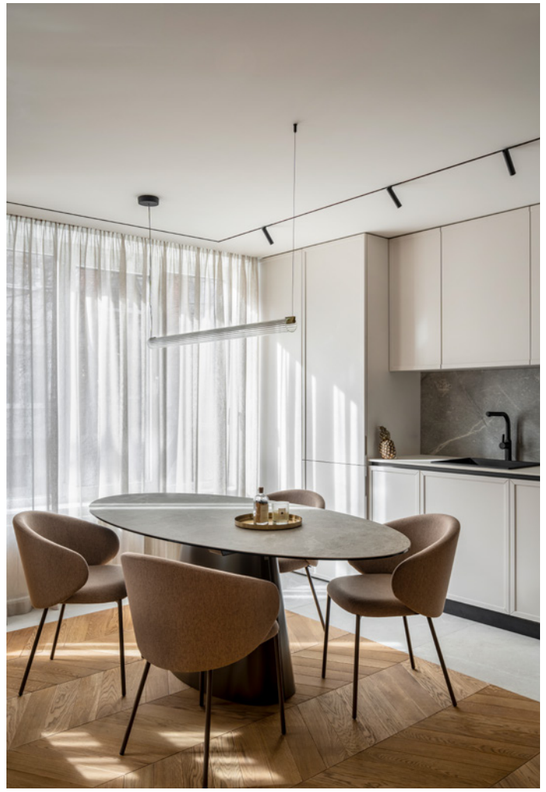

**PRIVATE RESIDENCE | EN-TRE STUDIO** BULGARIA



# FLYRA

*Ceiling* suspended



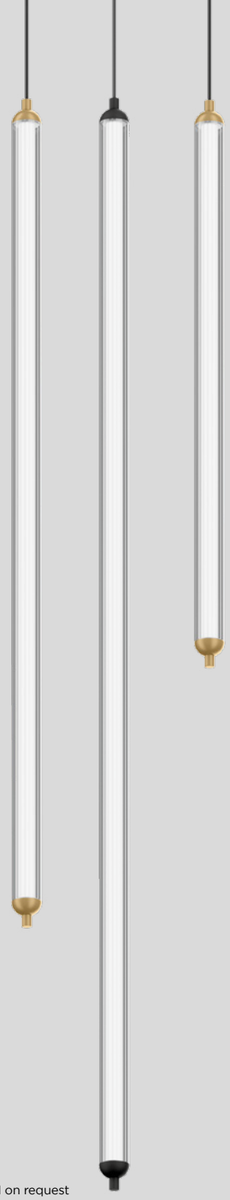

DALI on request




## 1.1 VERTICAL

LED strip 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 448,50 | 249184M_ |
| | 448,50 | 249184B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 710 | >90 | 3 |
| 3000K | 730 | >90 | 5 |




## 1.2 VERTICAL

LED strip 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 545,10 | 249284M_ |
| | 545,10 | 249284B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1065 | >90 | 3 |
| 3000K | 1095 | >90 | 5 |




## 1.3 VERTICAL

LED strip 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 641,70 | 249384M_ |
| | 641,70 | 249384B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1420 | >90 | 3 |
| 3000K | 1460 | >90 | 5 |



# FLYRA

*Ceiling* suspended

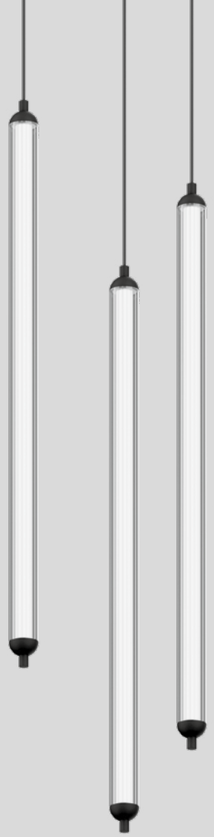




## 3.1 VERTICAL

LED strip 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 1573,20 | 449184BM_ |
| | 1573,20 | 449184BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 965 | >90 | 3 |
| 3000K | 995 | >90 | 5 |




## 3.3 VERTICAL

LED strip 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 1863,00 | 449284BM_ |
| | 1863,00 | 449284BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1450 | >90 | 3 |
| 3000K | 1490 | >90 | 5 |




## 6.3 VERTICAL

LED strip 35W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 3270,60 | 449384BM_ |
| | 3270,60 | 449384BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2900 | >90 | 3 |
| 3000K | 2985 | >90 | 5 |

401



# FLYRA

*Ceiling* suspended

401






## 1.1 HORIZONTAL

LED strip 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 462,30 | 269184M_ |
| | 462,30 | 269184B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 710 | >90 | 3 |
| 3000K | 730 | >90 | 5 |




## 1.2 HORIZONTAL

LED strip 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 545,10 | 269284M_ |
| | 545,10 | 269284B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1065 | >90 | 3 |
| 3000K | 1095 | >90 | 5 |




## 1.3 HORIZONTAL

LED strip 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 641,70 | 269384M_ |
| | 641,70 | 269384B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1420 | >90 | 3 |
| 3000K | 1460 | >90 | 5 |

DALI on request





reddot winner 2023

# FINLIN

*Ceiling* suspended

263

673 | 679

727




## 1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | | CHF | CODE |
|---|---|---|---|
| | 2.5m | 345,00 | 270184CH_ |
| | 2.5m | 345,00 | 270184B_ |
| | 10m | 386,40 | 270484B5 |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 485 | >90 | 5 |




## 2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | | CHF | CODE |
|---|---|---|---|
| | 2.5m | 358,80 | 270284CH_ |
| | 2.5m | 358,80 | 270284B_ |
| | 10m | 400,20 | 270584B5 |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 675 | >90 | 3 |
| 3000K | 730 | >90 | 5 |




## 3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | | CHF | CODE |
|---|---|---|---|
| | 2.5m | 407,10 | 270384CH_ |
| | 2.5m | 407,10 | 270384B_ |
| | 10m | 448,50 | 270684B5 |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 900 | >90 | 3 |
| 3000K | 975 | >90 | 5 |

## OPTIONAL

cover plate adapter for concrete housing

| | CHF | CODE |
|---|---|---|
| | 17,25 | 900194B0 |

# studo

## STUDO HELPS YOU OUT

STUDO zeigt, wie vielseitig eine Leuchte sein kann: Fünf verschiedene Abhängungen machen die ultraschlanke Pendelleuchte zum flexiblen Allrounder. Ihr Aluminiumprofil mit leistungsstarkem Reflektor und flachem Textilkabel sorgt für eine klare, minimalistische Optik – perfekt für Büro oder Küche.

STUDO démontre la polyvalence d'un luminaire : cinq options de suspension font de cette suspension ultra-fine un véritable atout flexible. Son profil en aluminium avec réflecteur performant et câble textile plat crée un look épuré et minimaliste – parfait pour le bureau ou la cuisine.



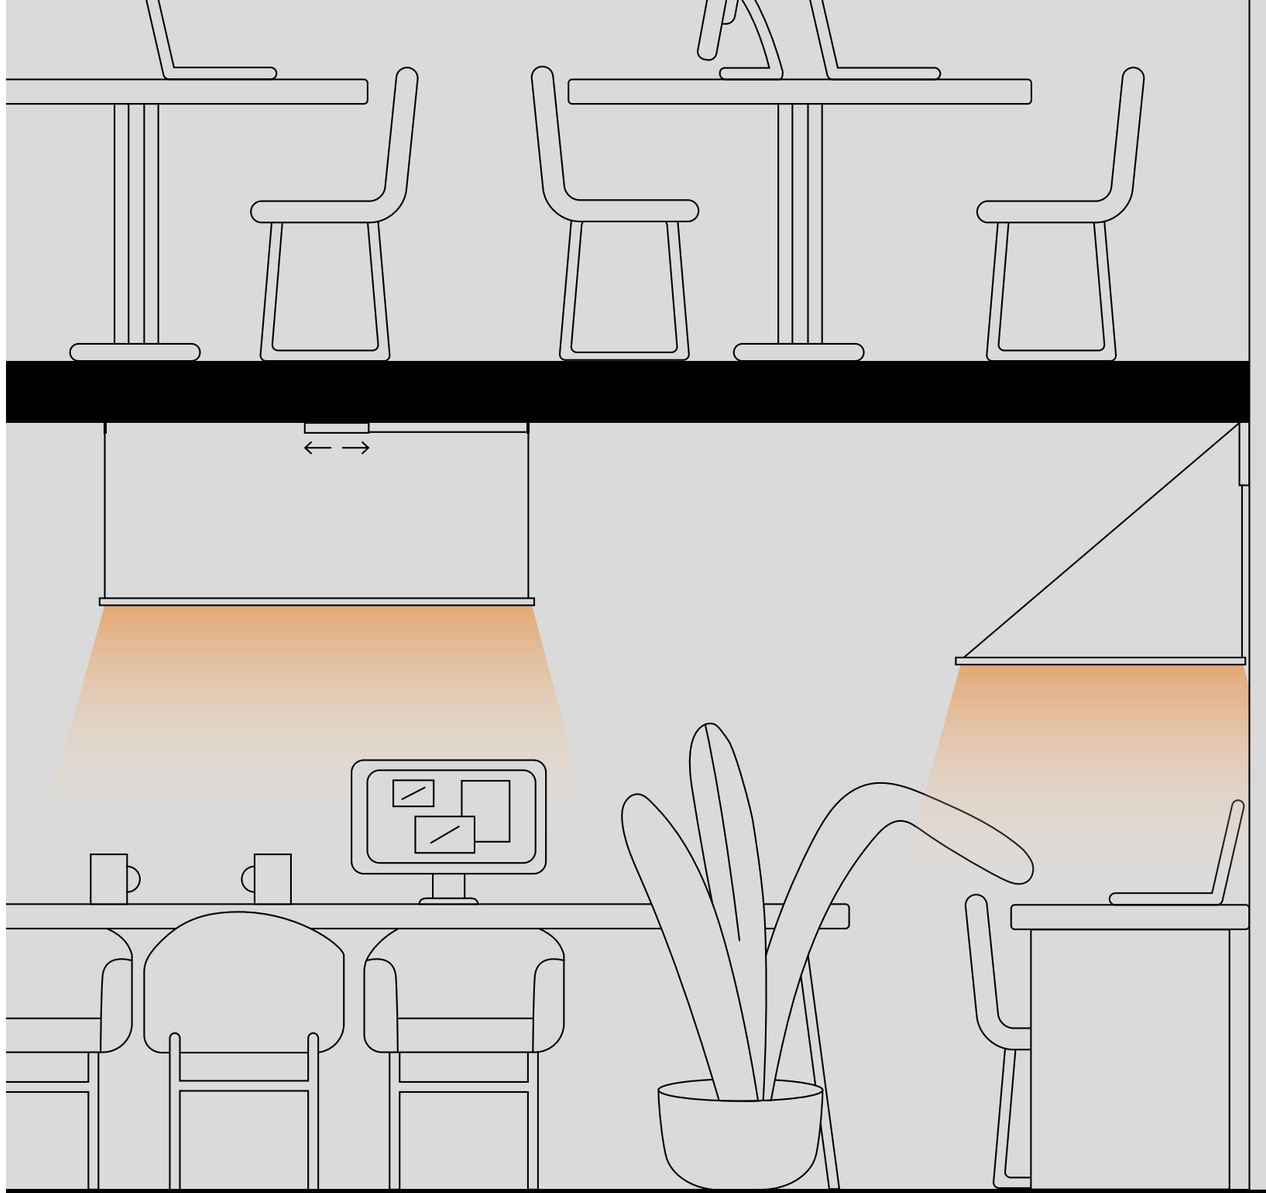

# STUDO

*Ceiling* suspended









## 1.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
suspension textile belt
incl. 2 ceiling brackets

IP20 W-67° L80|100K

3000K | CRI >90 | 1750lm

| | CHF | CODE |
|---|---|---|
| | 586,50 | 195174W5 |
| | 586,50 | 195174B5 |

## 2.0

LED PCB 27W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
suspension textile belt
incl. 2 ceiling brackets

IP20 W-67° L80|100K

3000K | CRI >90 | 2700lm

| | CHF | CODE |
|---|---|---|
| | 752,10 | 195274W5 |
| | 752,10 | 195274B5 |

UGR ≤ 19
65°≤ 3000cd





**PRIVATE RESIDENCE | STUDIO BRASS** THE NETHERLANDS

# FIL

*Ceiling* suspended

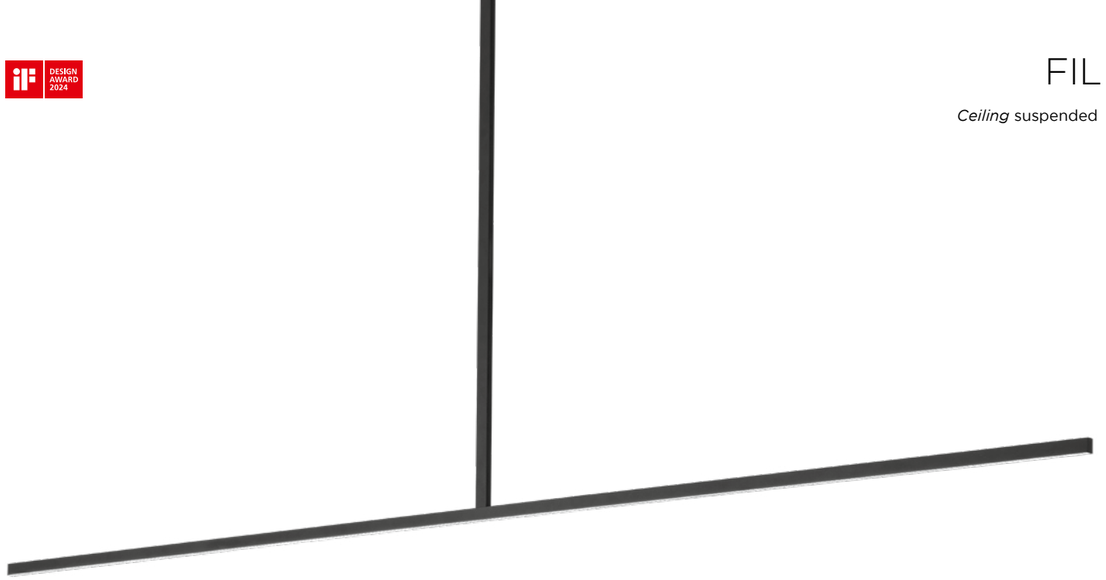

267

681




## 1.0

LED PCB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 641,70 | 2543M4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1070 | >90 | 3 |
| 3000K | 1120 | >90 | 5 |




## 2.0

LED PCB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 683,10 | 2544M4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1280 | >90 | 3 |
| 3000K | 1340 | >90 | 5 |










**PRIVATE RESIDENCE | RICCARDO ROSSI** SWITZERLAND




**BENEDICTION | KKOL STUDIO** SEOUL | SOUTH KOREA

# DARF

*Ceiling* suspended

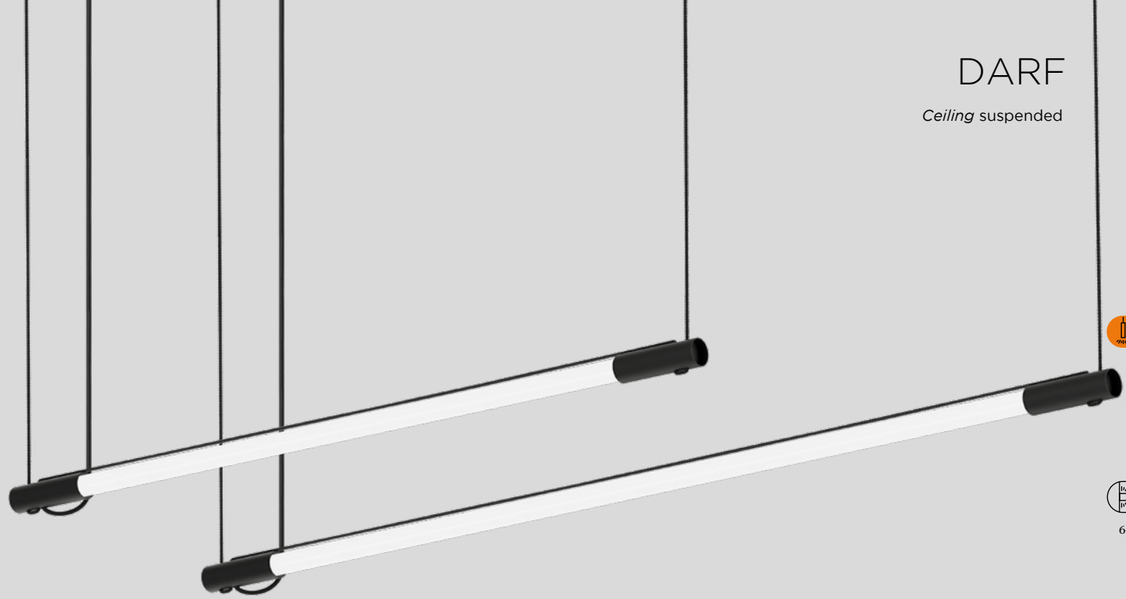

643




**2.1**

LED TUBE 10W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|75K

3000K | CRI >80 | 1530lm

| | CHF | CODE |
|---|---|---|
| | 329,85 | 2565T7B4 |




**3.1**

LED TUBE 14W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|75K

3000K | CRI >80 | 2300lm

| | CHF | CODE |
|---|---|---|
| | 336,75 | 2564T7B4 |




**4.1**

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|60K

| | CHF | CODE |
|---|---|---|
| | 342,25 | 2568T7B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 3560 | >80 | 4 |
| 4000K | 3950 | >80 | 6 |




**4.2**

LED TUBE 23W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|60K

| | CHF | CODE |
|---|---|---|
| | 423,70 | 2568T8B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2780 | >90 | 3 |
| 3000K | 2940 | >90 | 5 |

ARCHITECTS | THEMES BERGER & STUDIO MARCH GUT

LAMP-CONCEPT.CH

back





▶ DESIGN WITH LOVE

**MOTTO PILATES | STUDIO WOLF** OFFENBACH | GERMANY

LAMP-CONCEPT.CH

back



# SHEDDA

*Ceiling* suspended






## 1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 545,10 | 242184LS_ |
| | 545,10 | 242184SG_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 565 | >90 | 3 |
| 3000K | 580 | >90 | 5 |




## 2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 683,10 | 242284LS_ |
| | 683,10 | 242284SG_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 565 | >90 | 3 |
| 3000K | 580 | >90 | 5 |

# SHEDDA fractal

*Ceiling* suspended

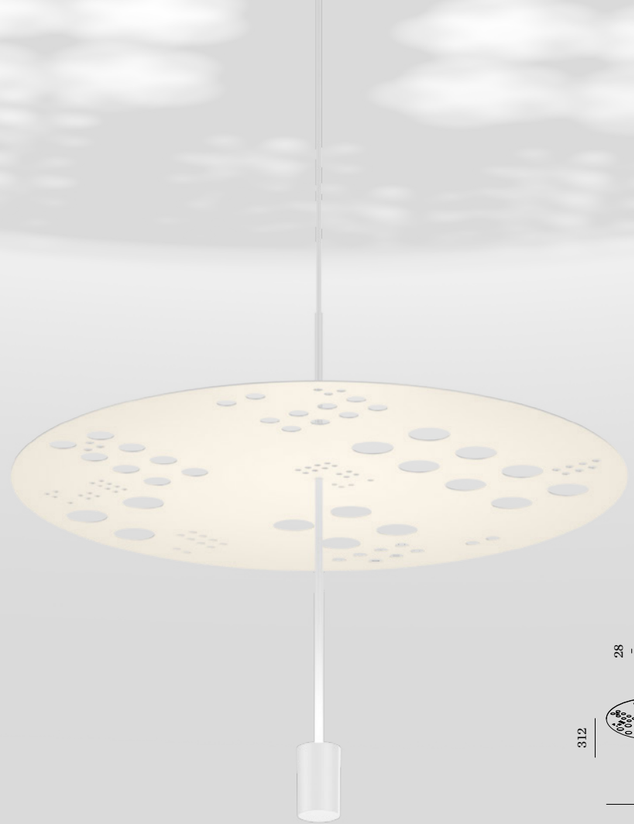




## 1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 614,10 | 242684LS_ |
| | 614,10 | 242684SG_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 565 | >90 | 3 |
| 3000K | 580 | >90 | 5 |




## 2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 752,10 | 242784LS_ |
| | 752,10 | 242784SG_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 565 | >90 | 3 |
| 3000K | 580 | >90 | 5 |



# KUJO

*Ceiling* suspended












## 1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 411,25 | 273184W_ |
| | 411,25 | 273184SG_ |
| | 411,25 | 273184M_ |
| | 411,25 | 273184Q_ |
| | 411,25 | 273184B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 755 | >90 | 3 |
| 3000K | 800 | >90 | 5 |

## 2.0

LED PCB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 517,50 | 273284W_ |
| | 517,50 | 273284SG_ |
| | 517,50 | 273284M_ |
| | 517,50 | 273284Q_ |
| | 517,50 | 273284B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1140 | >90 | 3 |
| 3000K | 1175 | >90 | 5 |

## 3.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 655,50 | 273384W_ |
| | 655,50 | 273384SG_ |
| | 655,50 | 273384M_ |
| | 655,50 | 273384Q_ |
| | 655,50 | 273384B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1520 | >90 | 3 |
| 3000K | 1565 | >90 | 5 |

white fixtures – white cable/silver steel wire | SG fixtures – SG cable/silver steel wire | others – black cable/steel wire
DALI on request



# KUJO

*Ceiling* suspended












## 2.1

LED PCB 34W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 897,00 | 273484W_ |
| | 897,00 | 273484SG_ |
| | 897,00 | 273484M_ |
| | 897,00 | 273484Q_ |
| | 897,00 | 273484B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1940 | >90 | 3 |
| 3000K | 2000 | >90 | 5 |

## 3.2

LED PCB 48W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 1124,70 | 273684W_ |
| | 1124,70 | 273684SG_ |
| | 1124,70 | 273684M_ |
| | 1124,70 | 273684Q_ |
| | 1124,70 | 273684B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2720 | >90 | 3 |
| 3000K | 2800 | >90 | 5 |

## 3.2.1

LED PCB 60W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

| | CHF | CODE |
|---|---|---|
| | 1511,10 | 273784W_ |
| | 1511,10 | 273784SG_ |
| | 1511,10 | 273784M_ |
| | 1511,10 | 273784Q_ |
| | 1511,10 | 273784B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3490 | >90 | 3 |
| 3000K | 3595 | >90 | 5 |

white fixtures – white cable/0.3m
connector/silver steel wire | SG fixtures
– SG cable/0.3m connector/steel wire
others – black cable/0.3m connector/
black steel wire
other connectors on page 921



# OPLIA CHANDELIER

*Ceiling* suspended

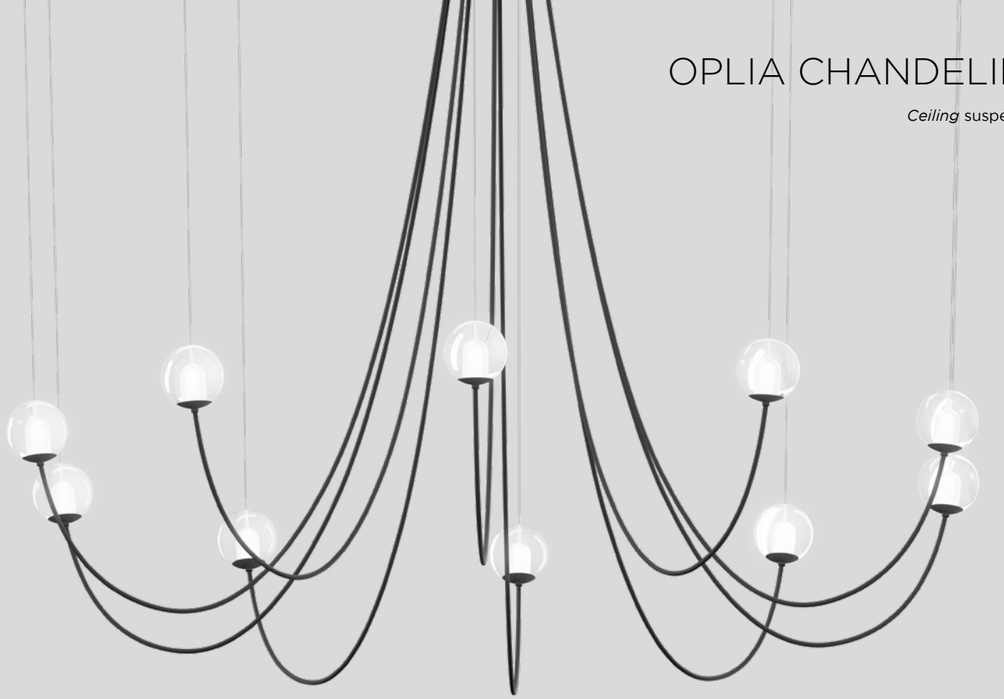







## 1.0

LED PCB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass
white fixture – white cable
black fixture – black cable

IP20 L80|100K

2700K| CRI >90 | 2000lm

| | CHF | CODE |
|---|---|---|
| | 2677,20 | 246584W3 |
| | 2677,20 | 246584B3 |

## 2.0

LED PCB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass
white fixture – white cable
black fixture – black cable

IP20 L80|100K

2700K| CRI >90 | 2000lm

| | CHF | CODE |
|---|---|---|
| | 2704,80 | 246684W3 |
| | 2704,80 | 246684B3 |







357



# QUBBY

*Ceiling* suspended

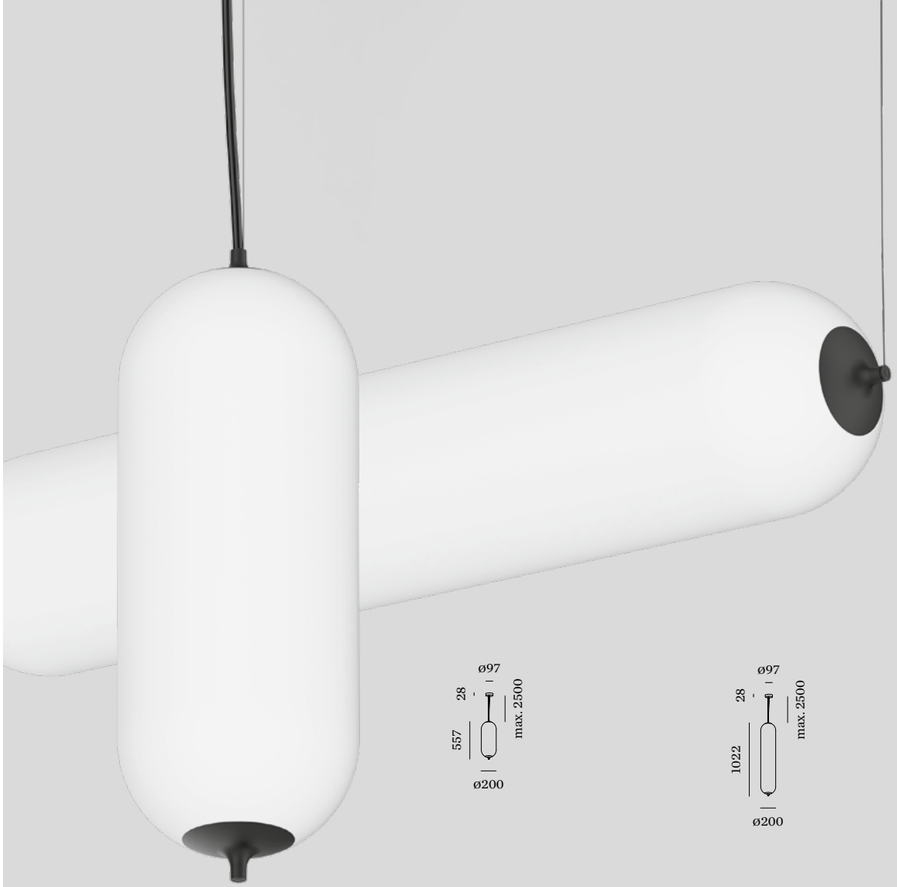



















## 1.0

LED PCB 16W | DALI-2 DT8
220-240VAC | 50-60Hz | incl. driver
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 1250lm

| | CHF | CODE |
|---|---|---|
| | 1021,20 | 251185B9 |

## 2.0

LED PCB 22W | DALI-2 DT8
220-240VAC | 50-60Hz | incl. driver
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 2500lm

| | CHF | CODE |
|---|---|---|
| | 1352,40 | 251285B9 |

## 3.0

LED PCB 35W | DALI-2 DT8
220-240VAC | 50-60Hz | incl. driver
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 4500lm

| | CHF | CODE |
|---|---|---|
| | 2125,20 | 251385B9 |



**OFFICE NNE | OVER BYEN** COPENHAGEN | DENMARK

# GIGANT

*Ceiling* suspended









## 10.0

LED PCB 43W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°

IP20 L80|60K

3000K | CRI >80 | 5330lm

| | CHF | CODE |
|---|---|---|
| | 2332,20 | 213385W4 |

4000K | CRI >80 | 5670lm

| | CHF | CODE |
|---|---|---|
| | 2332,20 | 213385W6 |

### OPTIONAL

| | CHF | CODE |
|---|---|---|
| suspension set 4m | 135,25 | 90015114 |

longer suspension on request

## 16.0

LED PCB 85W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°

IP20 L80|60K

3000K | CRI >80 | 10700lm

| | CHF | CODE |
|---|---|---|
| | 3105,00 | 213485W4 |

4000K | CRI >80 | 11300lm

| | CHF | CODE |
|---|---|---|
| | 3105,00 | 213485W6 |

### OPTIONAL

| | CHF | CODE |
|---|---|---|
| suspension set 4m | 135,25 | 90015114 |

longer suspension on request

# CONE

*Ceiling* suspended



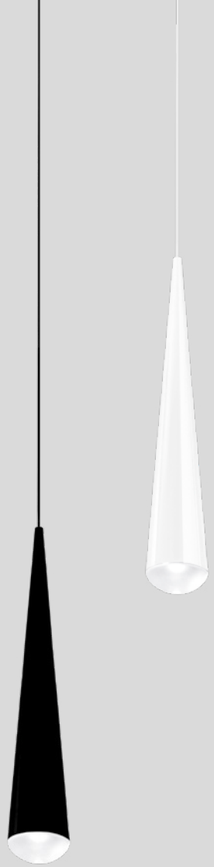




**1.0**

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | chrome plated | glass

IP20 M-38° L80|60K

2700K | CRI >90 | 405lm

| | CHF | CODE |
|---|---|---|
| | 389,20 | 200184W3 |
| | 389,20 | 200184B3 |




**PASTRY SHOP WITTAMER** BRUSSELS I BELGIUM

# DRO

*Ceiling* suspended



279
373
623
715 | 731




## 1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

| | CHF | CODE |
|---|---|---|
| | 269,10 | 2521G0WB0 |

**OPTIONAL**

QT14 3.5W | G9 | phase-cut dim clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 340lm | 24,85 | 9010G803 |
| 3000K \| 350lm | 24,85 | 9010G805 |




## 2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

| | CHF | CODE |
|---|---|---|
| | 379,50 | 2522C0WB0 |

**OPTIONAL**

C35 5.5W | E14 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 450lm | 14,50 | 9003C103 |




## 3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

| | CHF | CODE |
|---|---|---|
| | 489,90 | 2523E0WB0 |

**OPTIONAL**

A60 9W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |




## 4.0

A65 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

| | CHF | CODE |
|---|---|---|
| | 752,10 | 2524E0WB0 |

**OPTIONAL**

A65 14.6W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1375lm | 30,40 | 9003E153 |



**HAUS BRINA | PRO URBAN AG** DÜSSELDORF | GERMANY

# MIRRO

*Ceiling* suspended












283
625
721 | 733

## 1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

| | CHF | CODE |
|---|---|---|
| | 338,10 | 6341E0GB0 |
| | 338,10 | 6341E0NB0 |
| | 338,10 | 6341E0LB0 |
| | 338,10 | 6341E0BL0 |

## 2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

| | CHF | CODE |
|---|---|---|
| | 404,35 | 6342E0GB0 |
| | 404,35 | 6342E0NB0 |
| | 404,35 | 6342E0LB0 |
| | 404,35 | 6342E0BL0 |

## 3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

| | CHF | CODE |
|---|---|---|
| | 625,15 | 6343E0GB0 |
| | 625,15 | 6343E0NB0 |
| | 625,15 | 6343E0LB0 |
| | 625,15 | 6343E0BL0 |













## OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 405lm | 44,20 | 9003E139 |

A60 5.5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 405lm | 44,20 | 9003E140 |

## OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

## OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

**MORE VERSIONS ONLINE**
weverducre.com/more-mirro





**JOHN REED FITNESS** GRAZ | AUSTRIA





# MIRRO SOFT

*Ceiling* suspended







285

629

## 2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 404,35 | 6342E0MF0 |
| | 404,35 | 6342E0LF0 |
| | 404,35 | 6342E0IF0 |
| | 404,35 | 6342E0AF0 |

## 3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 625,15 | 6343E0MF0 |
| | 625,15 | 6343E0LF0 |
| | 625,15 | 6343E0IF0 |
| | 625,15 | 6343E0AF0 |

## OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

G95 4.5W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 375lm | 45,55 | 9003E160 |

## OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

G95 4.5W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 375lm | 45,55 | 9003E160 |

**MORE VERSIONS ONLINE**
weverducre.com/more-mirro




**COMBINE IT WITH OTHER OPTIONS**
weverducre.com/mirro



# SPIRRA SOFT

*Ceiling* suspended

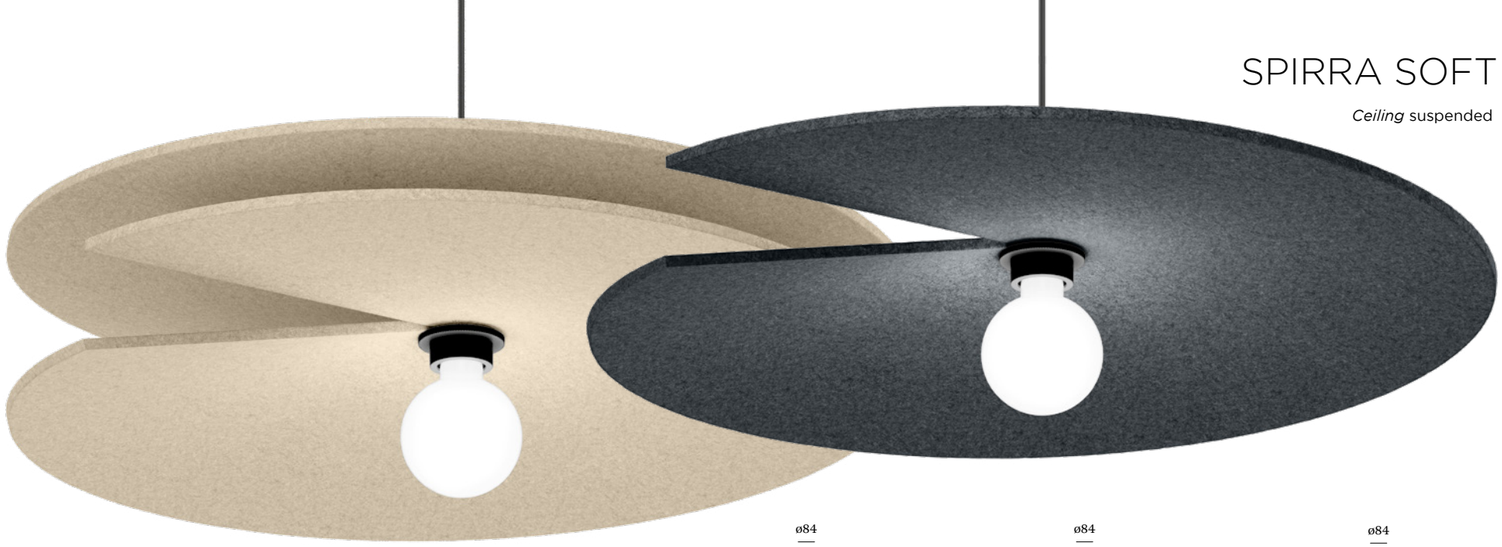










## 1.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 503,70 | 6351E0MF0 |
| | 503,70 | 6351E0LF0 |
| | 503,70 | 6351E0IF0 |
| | 503,70 | 6351E0AF0 |

## OPTIONAL

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

## 2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 765,90 | 6352E0MF0 |
| | 765,90 | 6352E0LF0 |
| | 765,90 | 6352E0IF0 |
| | 765,90 | 6352E0AF0 |

## OPTIONAL

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

## 3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 586,50 | 6353E0MF0 |
| | 586,50 | 6353E0LF0 |
| | 586,50 | 6353E0IF0 |
| | 586,50 | 6353E0AF0 |

## OPTIONAL

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

**MORE VERSIONS ONLINE**
weverducre.com/more-spirra-soft



# WAVE SOFT

*Ceiling* suspended












## 1.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 600,30 | 6361E0MF0 |
| | 600,30 | 6361E0LF0 |
| | 600,30 | 6361E0IF0 |
| | 600,30 | 6361E0AF0 |

## OPTIONAL

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

## 2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 959,10 | 6362E0MF0 |
| | 959,10 | 6362E0LF0 |
| | 959,10 | 6362E0IF0 |
| | 959,10 | 6362E0AF0 |

## OPTIONAL

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

## 3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 621,00 | 6363E0MF0 |
| | 621,00 | 6363E0LF0 |
| | 621,00 | 6363E0IF0 |
| | 621,00 | 6363E0AF0 |

## OPTIONAL

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

**MORE VERSIONS ONLINE**
weverducre.com/more-wave-soft



**EOAK FLOORS SHOWROOM | VIGONARCHITECTS** HANOI | VIETNAM



# J.J.W.

*Ceiling* suspended



289





633




## 04

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 2697,90 | 2052E0S0 |
| | 2697,90 | 2052E0G0 |

## OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |





# J.J.W.

*Ceiling* suspended




## 042

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 4954,20 | 2056E0S0 |
| | 4954,20 | 2056E0G0 |

## OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |

289

633

**MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS** VINEUIL-SAINT-FIRMIN | FRANCE

JULES VERNE

LAMP-CONCEPT.CH

back



**MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS** VINEUIL-SAINT-FIRMIN | FRANCE

LAMP-CONCEPT.CH

back

▶ DESIGN WITH LOVE



**MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT** VINEUIL-SAINT-FIRMIN | FRANCE



# J.J.W.

*Ceiling* suspended

289

633




## 05

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 2339,10 | 2053E0S0 |
| | 2339,10 | 2053E0G0 |

## OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |

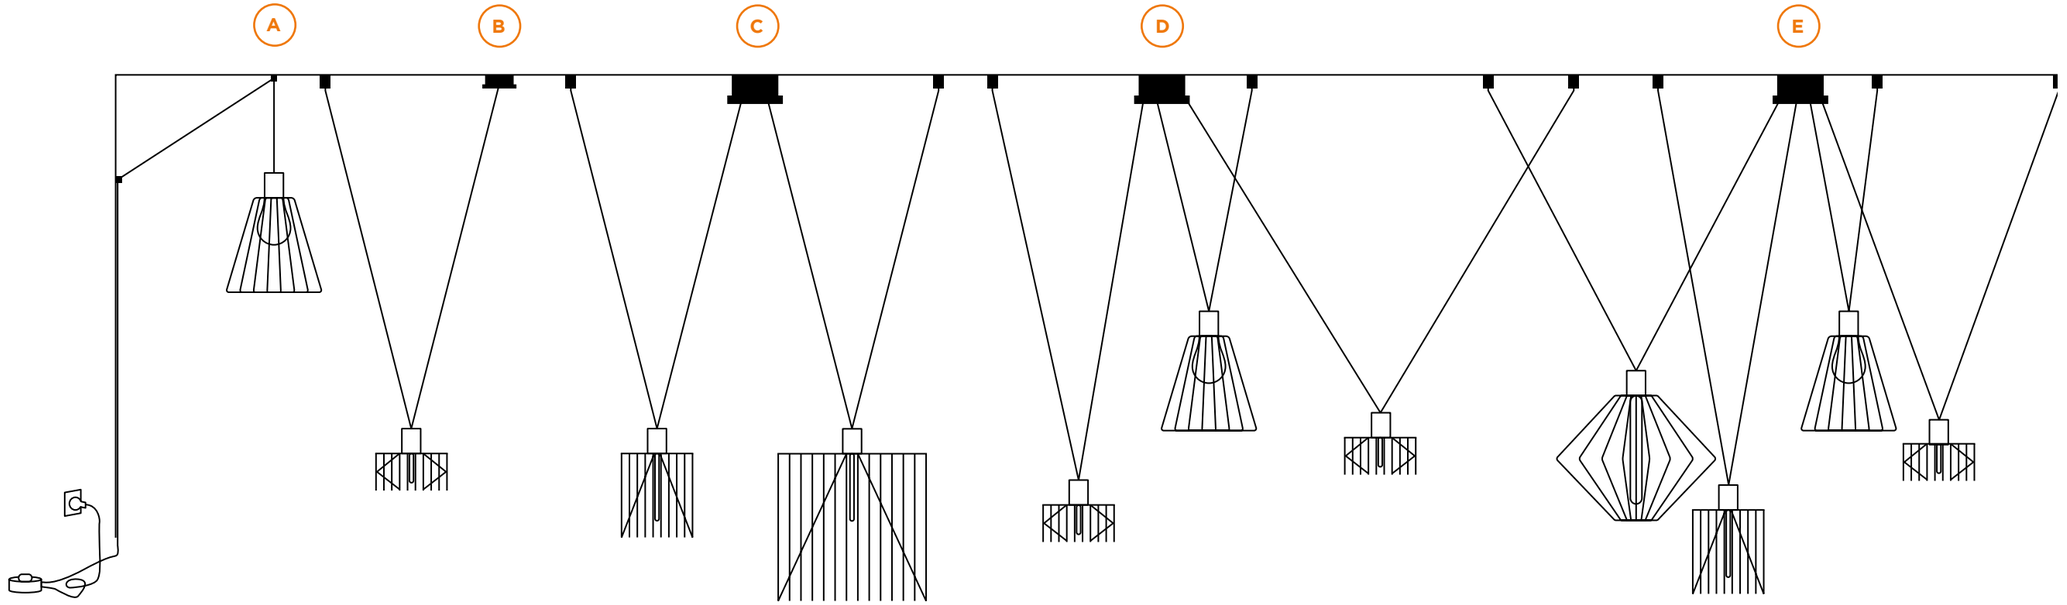


# decenter
















### 1.0 CONE

| | CHF | CODE |
|---|---|---|
| | 255,30 | 245100V0 |
| | 255,30 | 245100B0 |

### 2.0 WIRO

| | CHF | CODE |
|---|---|---|
| | 227,70 | 209600B0 |

### 1.8 WIRO

| | CHF | CODE |
|---|---|---|
| | 282,90 | 209200V0 |
| | 282,90 | 209200B0 |

### 3.8 WIRO

| | CHF | CODE |
|---|---|---|
| | 409,90 | 209300V0 |
| | 409,90 | 209300B0 |

### 1.1 DIAMOND

| | CHF | CODE |
|---|---|---|
| | 282,90 | 244100P0 |
| | 282,90 | 244100B0 |

**A**

### CABLE PLUG AND PLAY

E27 LED 4-25W | connector set for one shade | black textile cable incl. cable plug with dimmer | 2 cable brackets included

| | CHF | CODE |
|---|---|---|
| 8.5m | 231,85 | 90015165 |

**B**

### DECENTER SET 1.0

A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included

| | CHF | CODE |
|---|---|---|
| 2.6m | 149,05 | 90052050 |
| 6m | 162,85 | 90052051 |

**C**

### DECENTER SET 2.0

2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included

| | CHF | CODE |
|---|---|---|
| 2.6m | 273,25 | 90052055 |
| 6m | 314,65 | 90052056 |

**D**

### DECENTER SET 3.0

3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included

| | CHF | CODE |
|---|---|---|
| 2.6m | 394,70 | 90052060 |
| 6m | 463,70 | 90052063 |

**E**

### DECENTER SET 4.0

4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included

| | CHF | CODE |
|---|---|---|
| 2.6m | 507,85 | 90052067 |
| 6m | 576,85 | 90052078 |



RAIFFEISENBANK | BREM+ZEHNDER INNENARCHITEKTUR DIETIKON | SWITZERLAND

# WIRO

*Ceiling* suspended

291

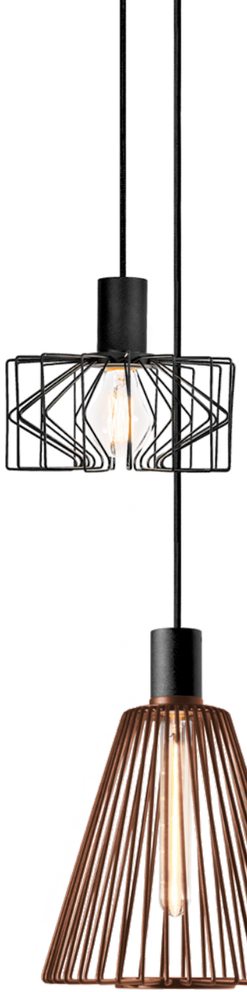




## 1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 391,95 | 2451E0V0 |
| | 391,95 | 2451E0B0 |

more suspension options on page 487

### OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 380lm | 53,85 | 9003E129 |
| 2700K \| 425lm | 53,85 | 9003E136 |




## 2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 364,35 | 2096E0B0 |

more suspension options on page 487

### OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |




## 1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 419,55 | 2092E0V0 |
| | 419,55 | 2092E0B0 |

more suspension options on page 487

### OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |

T30-225 5.3W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 380lm | 53,85 | 9003E129 |
| 2700K \| 425lm | 53,85 | 9003E136 |

**MORE VERSIONS ONLINE**
weverducre.com/more-wiro

BRAND STOCKIST
LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | STUDIO BENOIT** BELGIUM

# WIRO

*Ceiling* suspended






## 3.8

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 546,50 | 2093E0V0 |
| | 546,50 | 2093E0B0 |

more suspension options on page 487

### OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |

T30-225 5.3W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 380lm | 53,85 | 9003E129 |
| 2700K \| 425lm | 53,85 | 9003E136 |




## 6.1

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 621,00 | 2094E0V0 |
| | 621,00 | 2094E0B0 |

### OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 585lm | 59,35 | 9003E130 |
| 2700K \| 610lm | 59,35 | 9003E135 |




## 6.5

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 822,50 | 2095E0V0 |
| | 822,50 | 2095E0B0 |

### OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 585lm | 59,35 | 9003E130 |
| 2700K \| 610lm | 59,35 | 9003E135 |

**MORE VERSIONS ONLINE**
weverducre.com/more-wiro

BRAND STUDIO BERG

LAMP-CONCEPT.CH



RESTAURANT QUEBRACHO STEAKHOUSE & MIXOLOGY | MICHELE MEZZINA PESCARA | ITALY

# WIRO

*Ceiling* suspended








## 1.1 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 433,35 | 2441E0P0 |
| | 433,35 | 2441E0B0 |

more suspension options on page 487

### OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 585lm | 59,35 | 9003E130 |
| 2700K \| 610lm | 59,35 | 9003E135 |




## 2.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 903,90 | 2292E0P0 |
| | 903,90 | 2292E0B0 |

### OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 585lm | 59,35 | 9003E130 |
| 2700K \| 610lm | 59,35 | 9003E135 |




## 3.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 1276,50 | 2293E0P0 |
| | 1276,50 | 2293E0B0 |

### OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 585lm | 59,35 | 9003E130 |
| 2700K \| 610lm | 59,35 | 9003E135 |

**MORE VERSIONS ONLINE**
weverducre.com/more-wiro

BRAND STOCKIST
LAMP-CONCEPT.CH

back



**APARTMENT RONDA SANT PERE | DANIEL NASSAR** SPAIN




reddot award 2019
winner lighting design



# ROOMOR

*Ceiling* suspended


















## 1.1 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 293,95 | 248120GG1 |
| | 293,95 | 248120BK1 |
| | 287,05 | 248120BB1 |

## 1.1 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 293,95 | 2481E0GG1 |
| | 293,95 | 2481E0BK1 |
| | 287,05 | 2481E0BB1 |

## 1.2 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt

IP20

| | CHF | CODE |
|---|---|---|
| | 380,90 | 2481E0BF2 |
| | 354,70 | 2481E0BK2 |
| | 343,65 | 2481E0BB2 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## OPTIONAL

A60 9W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |

## OPTIONAL

A60 9W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |

**MORE VERSIONS ONLINE**
weverducre.com/more-roomor



**ADESA | MARKEY & SCHELSTRAETE** TIENEN | BELGIUM


BF3


BK3


BB3


BK4


BB4

reddot award 2019
winner lighting design



# ROOMOR

*Ceiling* suspended




## 1.3

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt

IP20

| | CHF | CODE |
|---|---|---|
| | 487,15 | 2481E0BF3 |
| | 472,00 | 2481E0BK3 |
| | 454,05 | 2481E0BB3 |

### OPTIONAL

A60 9W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |




## 1.4

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 545,10 | 2481E0BK4 |
| | 528,55 | 2481E0BB4 |

### OPTIONAL

A60 9W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |


639


725 | 735

**MORE VERSIONS ONLINE**
weverducre.com/more-roomor



**LINK LAB CREATIVE OFFICE | STAY STUDIO** KORTRIJK | BELGIUM

# ROOMOR OFFICE

*Ceiling* suspended



293

395







## 1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

IP20 L80|60K UGR ≤ 19

| | CHF | CODE |
|---|---|---|
| | 1083,30 | 1681M5W_ |
| | 1083,30 | 1681M5B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 3660 | >90 | 5 |
| 4000K | 3660 | >90 | 7 |

## 1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 1069,50 | 168185W_ |
| | 1069,50 | 168185B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 3700 | >90 | 5 |
| 4000K | 3700 | >90 | 7 |



CHOOSE YOUR BASE

# low

AL BL EL FL FL FL

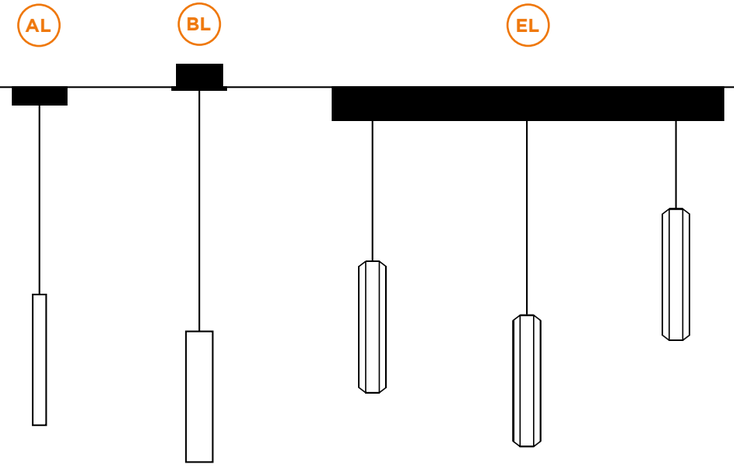













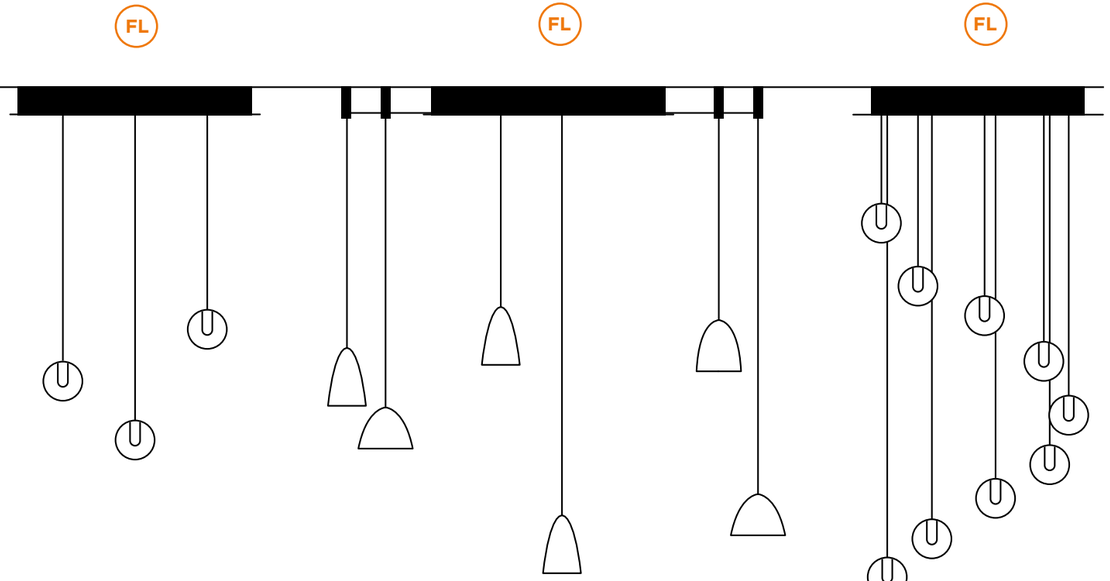










## AL | SINGLE BASE

ceiling base round
phase-cut dim | 350mA | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112L0 |
| | 89,70 | 914112G0 |
| | 89,70 | 914112M0 |
| | 89,70 | 914112Q0 |
| | 89,70 | 914112B0 |

DALI versions on page 920

### OPLIA

phase-cut dim | 250mA | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914115W0 |
| | 89,70 | 914115M0 |
| | 89,70 | 914115B0 |

DALI versions on page 920

## BL | SEMI RECESSED SINGLE BASE

phase-cut dim | 350mA | incl. driver

73-76 70 10-35

| | CHF | CODE |
|---|---|---|
| | 117,30 | 914152W0 |
| | 117,30 | 914152L0 |
| | 117,30 | 914152M0 |
| | 117,30 | 914152Q0 |
| | 117,30 | 914152B0 |

### OPLIA

phase-cut dim | 250mA | incl. driver

| | CHF | CODE |
|---|---|---|
| | 103,50 | 914155W0 |
| | 103,50 | 914155M0 |
| | 103,50 | 914155B0 |

## EL | MULTI BASE LINEAR

3, 6 or 9 luminaires | phase-cut dim
incl. driver | 175mA per luminaire
600mm | 1200mm | 1800mm

| | CHF | CODE |
|---|---|---|
| for 3 | 227,70 | 914133W0 |
| for 3 | 227,70 | 914133B0 |
| for 6 | 372,60 | 914134W0 |
| for 6 | 372,60 | 914134B0 |
| for 9 | 545,10 | 914135W0 |
| for 9 | 545,10 | 914135B0 |

## GL | TRACK ADAPTER

for 3-phase tracks
phase-cut dim | 350mA | incl. driver

| | CHF | CODE |
|---|---|---|
| | 63,50 | 914173W0 |
| | 63,50 | 914173B0 |

DALI versions on page 920

### OPLIA

phase-cut dim | 250mA | incl. driver

| | CHF | CODE |
|---|---|---|
| | 63,50 | 914171W0 |
| | 63,50 | 914171B0 |

DALI versions on page 920

## FL | MULTI CHANDELIER

3 luminaires | 3x175mA
phase-cut dim | incl. driver
**COZY CONE | MATCH | TRACE**
**ODREY | OPLIA**

| | CHF | CODE |
|---|---|---|
| | 358,80 | 914121WW0 |
| | 414,00 | 914121BL0 |
| | 358,80 | 914121BM0 |
| | 358,80 | 914121BQ0 |
| | 358,80 | 914121BB0 |

### RAY MINI | HEXO MINI | SOLLI

| | CHF | CODE |
|---|---|---|
| | 358,80 | 914124WW0 |
| | 414,00 | 914124BL0 |
| | 358,80 | 914124BM0 |
| | 358,80 | 914124BQ0 |
| | 358,80 | 914124BB0 |

## FL | MULTI CHANDELIER

6 luminaires | 6x175mA
phase-cut dim | incl. driver
**COZY CONE | MATCH | TRACE**
**ODREY | OPLIA**

| | CHF | CODE |
|---|---|---|
| | 407,10 | 914122WW0 |
| | 462,30 | 914122BL0 |
| | 407,10 | 914122BM0 |
| | 407,10 | 914122BQ0 |
| | 407,10 | 914122BB0 |

### RAY MINI | HEXO MINI | SOLLI

| | CHF | CODE |
|---|---|---|
| | 407,10 | 914125WW0 |
| | 462,30 | 914125BL0 |
| | 407,10 | 914125BM0 |
| | 407,10 | 914125BQ0 |
| | 407,10 | 914125BB0 |

## FL | MULTI CHANDELIER

9 luminaires | 9x175mA
phase-cut dim | incl. driver
**COZY CONE | MATCH | TRACE**
**ODREY | OPLIA**

| | CHF | CODE |
|---|---|---|
| | 455,40 | 914123WW0 |
| | 510,60 | 914123BL0 |
| | 455,40 | 914123BM0 |
| | 455,40 | 914123BQ0 |
| | 455,40 | 914123BB0 |

### RAY MINI | HEXO MINI | SOLLI

| | CHF | CODE |
|---|---|---|
| | 455,40 | 914126WW0 |
| | 510,60 | 914126BL0 |
| | 455,40 | 914126BM0 |
| | 455,40 | 914126BQ0 |
| | 455,40 | 914126BB0 |

## HOOK

optional for
**FL | MULTI CHANDELIER**

| | CHF | CODE |
|---|---|---|
| | 26,25 | 90052083 |
| | 26,25 | 90052084 |

more Multi chandelier options
on page 920



# COZY CONE

*Low* voltage
*Ceiling* suspended



345

## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112L0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**
**EL | Multi base linear**

**FL | Multi chandelier**
6 luminaires | 6x175mA | 1440lm
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 407,10 | 914122WW0 |
| | 462,30 | 914122BL0 |
| | 407,10 | 914122BB0 |

**GL | Track adapter**
more infos on page 500

**LOXONE VERSIONS ONLINE**
weverducre.com/more-cozy-cone




### 1.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 500lm

| | CHF | CODE |
|---|---|---|
| | 172,50 | 241161LS3 |
| | 172,50 | 241161SG3 |
| | 172,50 | 241161FJ3 |
| | 183,55 | 241161T3 |
| | 172,50 | 241161B3 |




### 2.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 510lm

| | CHF | CODE |
|---|---|---|
| | 179,40 | 241261LS3 |
| | 179,40 | 241261SG3 |
| | 179,40 | 241261FJ3 |
| | 190,45 | 241261T3 |
| | 179,40 | 241261B3 |




### 3.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 545lm

| | CHF | CODE |
|---|---|---|
| | 186,30 | 241361LS3 |
| | 186,30 | 241361SG3 |
| | 186,30 | 241361FJ3 |
| | 197,35 | 241361T3 |
| | 186,30 | 241361B3 |



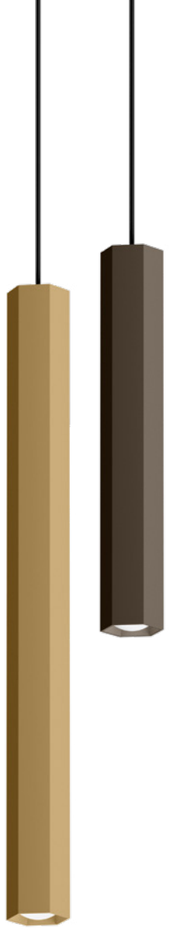

# HEXO mini

*Low* voltage
*Ceiling* suspended


243


375 | 391




611







## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112M0 |
| | 89,70 | 914112Q0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**
**EL | Multi base linear**
**FL | Multi chandelier**
**GL | Track adapter**
more infos on page 500

**LOXONE VERSIONS ONLINE**
weverducre.com/more-hexo

## 3.0

LED COB 6W | 350mA | 18V
aluminium

IP20 W-75° L80|50K

| | CHF | CODE |
|---|---|---|
| | 256,70 | 259171M_ |
| | 256,70 | 259171Q_ |
| | 256,70 | 259171B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 525 | >90 | 3 |
| 3000K | 565 | >90 | 5 |

## 5.0

LED COB 6W | 350mA | 18V
aluminium

IP20 W-75° L80|50K

| | CHF | CODE |
|---|---|---|
| | 284,30 | 259271M_ |
| | 284,30 | 259271Q_ |
| | 284,30 | 259271B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 525 | >90 | 3 |
| 3000K | 565 | >90 | 5 |



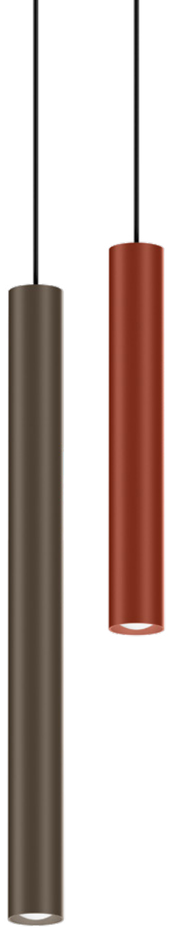

# RAY mini

*Low* voltage
*Ceiling* suspended


















## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112Q0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**
**EL | Multi base linear**
**FL | Multi chandelier**
**GL | Track adapter**
more infos on page 500

**LOXONE VERSIONS ONLINE**
weverducre.com/more-ray

## 3.0

LED COB 6W | 350mA | 18V
aluminium
white and LS fixtures –white cable
others – black cable

IP20 W-75° L80|50K

| | CHF | CODE |
|---|---|---|
| | 247,05 | 260171W_ |
| | 247,05 | 260171LS_ |
| | 247,05 | 260171ME_ |
| | 247,05 | 260171Q_ |
| | 247,05 | 260171B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 525 | >90 | 3 |
| 3000K | 565 | >90 | 5 |

## 5.0

LED COB 6W | 350mA | 18V
aluminium
white and LS fixtures –white cable
others – black cable

IP20 W-75° L80|50K

| | CHF | CODE |
|---|---|---|
| | 274,65 | 260271W_ |
| | 274,65 | 260271LS_ |
| | 274,65 | 260271Q_ |
| | 274,65 | 260271B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 525 | >90 | 3 |
| 3000K | 565 | >90 | 5 |





reddot winner 2023

# MATCH

*Low* voltage
*Ceiling* suspended












## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112L0 |
| | 89,70 | 914112M0 |
| | 89,70 | 914112Q0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**

**EL | Multi base linear**
3 luminaires | 3x175mA | 525mm
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 227,70 | 914133W0 |
| | 227,70 | 914133B0 |

**FL | Multi chandelier**
**GL | Track adapter**
more infos on page 500



**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-match-suspended

## 3.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

| | CHF | CODE |
|---|---|---|
| | 160,10 | 279271W_ |
| | 169,75 | 279271L_ |
| | 169,75 | 279271M_ |
| | 169,75 | 279271Q_ |
| | 160,10 | 279271B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 490 | >90 | 3 |
| 3000K | 520 | >90 | 5 |

## 5.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

| | CHF | CODE |
|---|---|---|
| | 178,05 | 279371W_ |
| | 190,45 | 279371L_ |
| | 190,45 | 279371M_ |
| | 190,45 | 279371Q_ |
| | 178,05 | 279371B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 490 | >90 | 3 |
| 3000K | 520 | >90 | 5 |



PRIVATE RESIDENCE | IN LIJN INTERIEUR ARCHITECTUUR BELGIUM

DESIGN AWARD 2024

reddot winner 2023



# TRACE

*Low* voltage
*Ceiling* suspended







## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112L0 |
| | 89,70 | 914112M0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**

**EL | Multi base linear**
3 luminaires | 3x175mA | 525mm
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 227,70 | 914133W0 |
| | 227,70 | 914133B0 |

**FL | Multi chandelier**
**GL | Track adapter**
more infos on page 500

## 2.0

LED COB 6W | 350mA | 17V
aluminium
white fixtures – white cable
others – black cable

IP20 W-75° L80|50K

| | CHF | CODE |
|---|---|---|
| | 293,95 | 253471W_ |
| | 296,70 | 253471BL_ |
| | 296,70 | 253471BM_ |
| | 293,95 | 253471B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 565 | >90 | 3 |
| 3000K | 590 | >90 | 5 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-trace-suspended





**PRIVATE RESIDENCE | STUDIO FOOLEN** THE NETHERLANDS

DESIGN AWARD 2024

reddot winner 2023

# TRACE

*Low* voltage
*Ceiling* suspended







261 | 269 | 273



351





593 | 595







## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112L0 |
| | 89,70 | 914112M0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**
**EL | Multi base linear**
**FL | Multi chandelier**
**GL | Track adapter**
more infos on page 500

**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-trace-suspended

## 3.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

| | CHF | CODE |
|---|---|---|
| | 186,30 | 253171W_ |
| | 196,00 | 253171BL_ |
| | 196,00 | 253171BM_ |
| | 186,30 | 253171B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 490 | >90 | 3 |
| 3000K | 520 | >90 | 5 |

## 5.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

| | CHF | CODE |
|---|---|---|
| | 198,75 | 253271W_ |
| | 211,15 | 253271BL_ |
| | 211,15 | 253271BM_ |
| | 198,75 | 253271B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 475 | >90 | 5 |



**HIDEAWAY PLANNERALM | INNOCAD** SALZBURG | AUSTRIA

# ODREY

*Low* voltage
*Ceiling* suspended


















## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112L0 |
| | 89,70 | 914112G0 |
| | 89,70 | 914112Q0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**
**EL | Multi base linear**
**FL | Multi chandelier**
**GL | Track adapter**
more infos on page 500

**LOXONE VERSIONS ONLINE**
weverducre.com/more-odrey-suspended

## 1.1

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 237,40 | 287161WW_ |
| | 237,40 | 287161QQ_ |
| | 237,40 | 287161BL_ |
| | 237,40 | 287161BG_ |
| | 237,40 | 287161BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 400 | >90 | 3 |
| 3000K | 445 | >90 | 5 |

## 1.2

LED COB 7W | 350mA | 18V
aluminium | shade matching
incl inner cover
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 328,45 | 287261WW_ |
| | 328,45 | 287261QQ_ |
| | 328,45 | 287261BL_ |
| | 328,45 | 287261BG_ |
| | 328,45 | 287261BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 400 | >90 | 3 |
| 3000K | 445 | >90 | 5 |

## 1.3

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 238,75 | 287361WW_ |
| | 238,75 | 287361QQ_ |
| | 238,75 | 287361BL_ |
| | 238,75 | 287361BG_ |
| | 238,75 | 287361BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 470 | >90 | 5 |


















**RADIOLOGY AZ MONICA | EEF DEBEUF INTERIEURARCHITECT** ANTWERP | BELGIUM

# ODREY

*Low* voltage
*Ceiling* suspended















353 | 379







599

## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112L0 |
| | 89,70 | 914112G0 |
| | 89,70 | 914112Q0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**
**EL | Multi base linear**
**FL | Multi chandelier**
**GL | Track adapter**
more infos on page 500

**LOXONE VERSIONS ONLINE**
weverducre.com/more-odrey-suspended

## 1.4

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 248,40 | 287461WW_ |
| | 248,40 | 287461QQ_ |
| | 248,40 | 287461BL_ |
| | 248,40 | 287461BG_ |
| | 248,40 | 287461BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 470 | >90 | 5 |

## 1.5

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 252,55 | 287561WW_ |
| | 252,55 | 287561QQ_ |
| | 252,55 | 287561BL_ |
| | 252,55 | 287561BG_ |
| | 252,55 | 287561BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 470 | >90 | 5 |

## 1.6

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

| | CHF | CODE |
|---|---|---|
| | 253,95 | 287661WW_ |
| | 253,95 | 287661QQ_ |
| | 253,95 | 287661BL_ |
| | 253,95 | 287661BG_ |
| | 253,95 | 287661BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 480 | >90 | 3 |
| 3000K | 505 | >90 | 5 |

optional inner cover on page 910





# OPLIA

*Low* voltage
*Ceiling* suspended







## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 250mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914115W0 |
| | 89,70 | 914115M0 |
| | 89,70 | 914115B0 |

**BL | Semi recessed single base**
**EL | Multi base linear**

**FL | Multi chandelier**
6 luminaires | 6x175mA | 1020lm
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 407,10 | 914122WW0 |
| | 407,10 | 914122BM0 |
| | 407,10 | 914122BB0 |

**GL | Track adapter**
more infos on page 500

## 1.0

LED PCB 4W | 250mA | 12V
aluminium | glass
white fixtures – white cable
others – black cable

IP20 L80|100K

2700K | CRI >90 | 245lm

| | CHF | CODE |
|---|---|---|
| | 196,00 | 246181W3 |
| | 196,00 | 246181M3 |
| | 196,00 | 246181B3 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-oplia

LAMP-CONCEPT.CH

back



**SPICY LEMON | STAY STUDIO** KORTRIJK | BELGIUM

# SOLLI

*Low* voltage
*Ceiling* suspended






## 1.0

LED COB 7W | 350mA | 18V
aluminium
artisanal hand blown glass

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 317,40 | 238281FD_ |
| | 317,40 | 238281TD_ |
| | 265,00 | 238281WB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 360 | >90 | 3 |
| 3000K | 370 | >90 | 5 |

## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112L0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**
**EL | Multi base linear**
**FL | Multi chandelier**
**GL | Track adapter**
more infos on page 500

**LOXONE VERSIONS ONLINE**
weverducre.com/more-solli

LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | AGENCE BÉATRICE CASSAN** FRANCE

# SOLLI COCOON

*Low* voltage
*Ceiling* suspended












## CHOOSE YOUR BASE

**AL | Single base**
ceiling base round | 350mA
phase-cut dim | incl. driver

| | CHF | CODE |
|---|---|---|
| | 89,70 | 914112W0 |
| | 89,70 | 914112L0 |
| | 89,70 | 914112B0 |

**BL | Semi recessed single base**
**EL | Multi base linear**
**FL | Multi chandelier**
**GL | Track adapter**
more infos on page 500

**LOXONE VERSIONS ONLINE**
weverducre.com/more-solli-cocoon

## 1.0

LED COB 7W | 350mA | 18V
aluminium | PET felt material
artisanal hand blown glass
noise absorbing material

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 443,00 | 238381MF_ |
| | 443,00 | 238381LF_ |
| | 443,00 | 238381OF_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 265 | >90 | 3 |
| 3000K | 275 | >90 | 5 |

## 2.0

LED COB 7W | 350mA | 18V
aluminium | PET felt material
artisanal hand blown glass
noise absorbing material

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 452,65 | 238481MF_ |
| | 452,65 | 238481LF_ |
| | 452,65 | 238481OF_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 275 | >90 | 3 |
| 3000K | 285 | >90 | 5 |

## 3.0

full acoustic element
aluminium | PET felt material
incl. black single base
noise absorbing material

| | CHF | CODE |
|---|---|---|
| | 284,30 | 238600MF0 |
| | 284,30 | 238600LF0 |
| | 284,30 | 238600OF0 |



CHOOSE YOUR BASE

# high

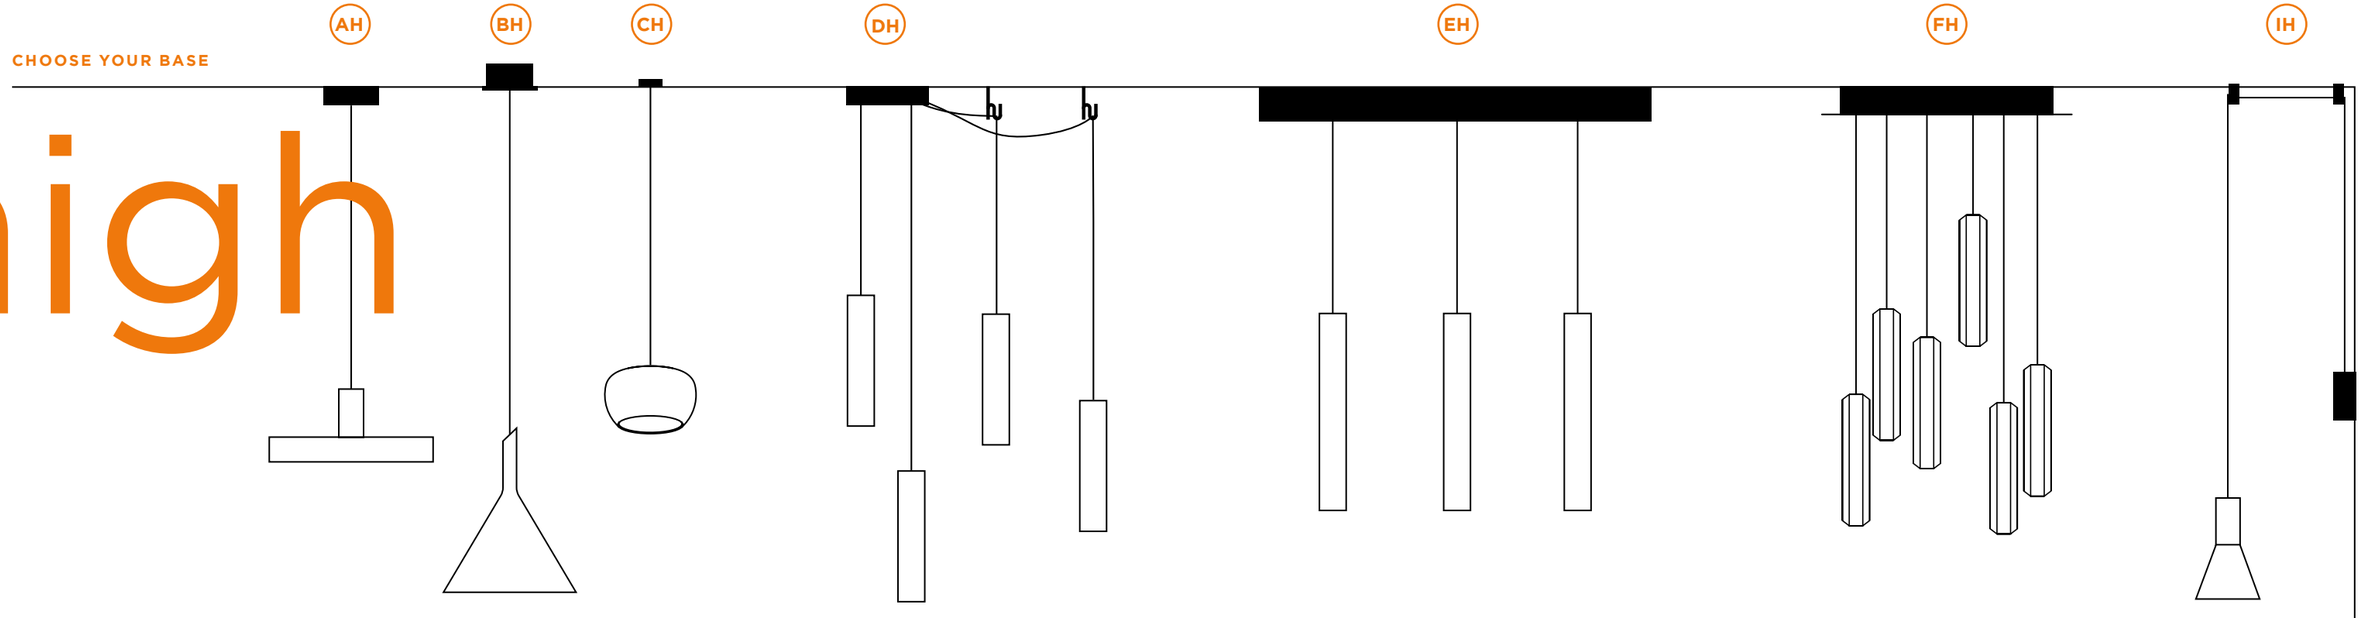


























## AH | SINGLE BASE

ceiling base round

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110G0 |
| | 40,05 | 914110M0 |
| | 40,05 | 914110Q0 |
| | 40,05 | 914110B0 |

## BH | SEMI RECESSED SINGLE BASE

Ø 73-76 70 10-35

| | CHF | CODE |
|---|---|---|
| | 66,25 | 914150W0 |
| | 66,25 | 914150L0 |
| | 66,25 | 914150G0 |
| | 66,25 | 914150M0 |
| | 66,25 | 914150Q0 |
| | 66,25 | 914150B0 |

## CH | INVISIBLE SINGLE BASE

plasterkit | system - with fixation
max. 10kg

Ø 68 70 12.5-27.50

| | CHF | CODE |
|---|---|---|
| | 149,05 | 90015196 |
| | 149,05 | 90015195 |

## DH | MULTI BASE ROUND

up to max. 4 | 8 luminaires

| | CHF | CODE |
|---|---|---|
| max. 4 | 89,70 | 90052005 |
| max. 4 | 89,70 | 90052006 |
| max. 8 | 107,65 | 90052031 |
| max. 8 | 107,65 | 90052032 |

## EH | MULTI BASE LINEAR

1-9 luminaires
600mm | 900mm | 1800mm

| | CHF | CODE |
|---|---|---|
| for 3 | 165,60 | 914130W0 |
| for 3 | 165,60 | 914130B0 |
| for 6 | 248,40 | 914131W0 |
| for 6 | 248,40 | 914131B0 |
| for 9 | 358,80 | 914132W0 |
| for 9 | 358,80 | 914132B0 |

## FH | MULTI CHANDELIER

1-9 luminaires

| | CHF | CODE |
|---|---|---|
| | 324,30 | 914120WW0 |
| | 379,50 | 914120BL0 |
| | 324,30 | 914120BM0 |
| | 324,30 | 914120BQ0 |
| | 324,30 | 914120BB0 |

optional hook

| | CHF | CODE |
|---|---|---|
| | 26,25 | 90052083 |
| | 26,25 | 90052084 |

## GH | TRACK ADAPTER

for 1-phase tracks

| | CHF | CODE |
|---|---|---|
| | 22,10 | 90014277 |
| | 22,10 | 90014278 |




for 3-phase tracks

| | CHF | CODE |
|---|---|---|
| | 22,10 | 90014279 |
| | 22,10 | 90014280 |

## IH | WALL BASE

for 1 luminaire | incl. 2 wall-ceiling brackets | for cable 4.25-5.5mm diameter | incl. switch on/off

| | CHF | CODE |
|---|---|---|
| | 80,05 | 90019195 |
| | 80,05 | 90019196 |

wall - ceiling bracket

| | CHF | CODE |
|---|---|---|
| | 15,90 | 90019197 |
| | 15,90 | 90019198 |




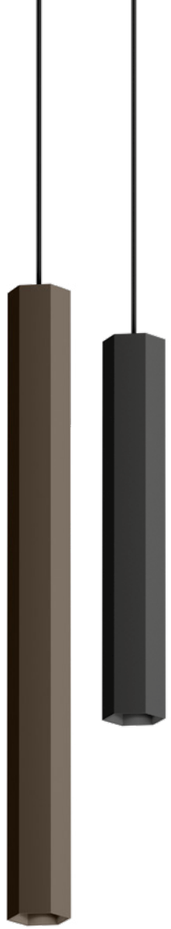

# HEXO mini

*High* voltage
*Ceiling* suspended










## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110M0 |
| | 40,05 | 914110Q0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

## 3.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 168,40 | 259120M0 |
| | 168,40 | 259120Q0 |
| | 168,40 | 259120B0 |

### OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 225lm | 20,05 | 901128B3 |
| 3000K \| 235lm | 20,05 | 901128B5 |

## 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 196,00 | 259220M0 |
| | 196,00 | 259220Q0 |
| | 196,00 | 259220B0 |

### OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 225lm | 20,05 | 901128B3 |
| 3000K \| 235lm | 20,05 | 901128B5 |




# HEXO

*High* voltage
*Ceiling* suspended












## 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-36° L80|55K

| | CHF | CODE |
|---|---|---|
| | 271,90 | 226464G_ |
| | 271,90 | 226464Q_ |
| | 271,90 | 226464P_ |
| | 269,10 | 226464B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 405 | >90 | 3 |
| 3000K | 425 | >90 | 5 |
| 2000-3000K | 260 | >90 | 9 |

LED module 20 years replaceability

## 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 153,20 | 227420G0 |
| | 153,20 | 227420Q0 |
| | 153,20 | 227420P0 |
| | 150,45 | 227420B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110G0 |
| | 40,05 | 914110Q0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

**LOXONE VERSIONS ONLINE**
weverducre.com/more-hexo






# RAY mini

*High* voltage
*Ceiling* suspended


247


375 | 391




613







## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110Q0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
ceiling base round | ø84

| | CHF | CODE |
|---|---|---|
| | 66,25 | 914150W0 |
| | 66,25 | 914150Q0 |
| | 66,25 | 914150B0 |

**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

## 3.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
white and LS fixtures – white cable
others – black cable

IP20

| | CHF | CODE |
|---|---|---|
| | 158,70 | 260120W0 |
| | 158,70 | 260120LS0 |
| | 158,70 | 260120ME0 |
| | 158,70 | 260120Q0 |
| | 158,70 | 260120B0 |

### OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 240lm | 20,05 | 901128W3 |
| 2700K \| 225lm | 20,05 | 901128B3 |
| 3000K \| 255lm | 20,05 | 901128W5 |
| 3000K \| 235lm | 20,05 | 901128B5 |

## 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
white and LS fixtures – white cable
others – black cable

IP20

| | CHF | CODE |
|---|---|---|
| | 186,30 | 260220W0 |
| | 186,30 | 260220LS0 |
| | 186,30 | 260220Q0 |
| | 186,30 | 260220B0 |

### OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 240lm | 20,05 | 901128W3 |
| 2700K \| 225lm | 20,05 | 901128B3 |
| 3000K \| 255lm | 20,05 | 901128W5 |
| 3000K \| 235lm | 20,05 | 901128B5 |




**ANDERSEN AARHUS | AK83 ARKITEKTER** COPENHAGEN | DENMARK

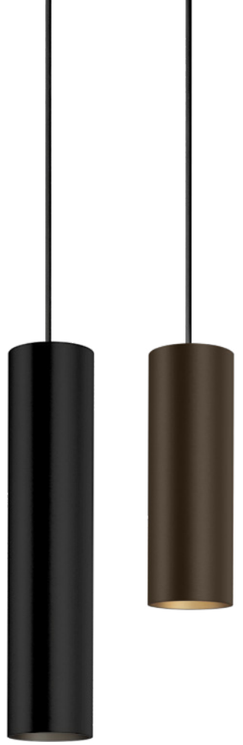

# RAY

*High* voltage
*Ceiling* suspended




## 2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable
others – black cable

IP20 M-36° L80|55K

**2.0**

| 200mm | CHF | CODE |
|---|---|---|
| | 245,65 | 226764W_ |
| | 255,30 | 226764L_ |
| | 255,30 | 226764G_ |
| | 255,30 | 226764M_ |
| | 255,30 | 226764Q_ |
| | 255,30 | 226764P_ |
| | 245,65 | 226764B_ |

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 253,95 | 226864W_ |
| | 263,60 | 226864L_ |
| | 263,60 | 226864G_ |
| | 263,60 | 226864M_ |
| | 263,60 | 226864Q_ |
| | 263,60 | 226864P_ |
| | 253,95 | 226864B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 405 | >90 | 3 |
| 3000K | 425 | >90 | 5 |
| 2000-3000K | 570 | >90 | 9 |

LED module 20 years replaceability




## 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

**2.0**

| 200mm | CHF | CODE |
|---|---|---|
| | 127,00 | 227720W0 |
| | 136,65 | 227720L0 |
| | 136,65 | 227720G0 |
| | 136,65 | 227720M0 |
| | 136,65 | 227720Q0 |
| | 136,65 | 227720P0 |
| | 127,00 | 227720B0 |

**3.0**

| 300mm | CHF | CODE |
|---|---|---|
| | 135,25 | 227820W0 |
| | 144,90 | 227820L0 |
| | 144,90 | 227820G0 |
| | 144,90 | 227820M0 |
| | 144,90 | 227820Q0 |
| | 144,90 | 227820P0 |
| | 135,25 | 227820B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110G0 |
| | 40,05 | 914110M0 |
| | 40,05 | 914110Q0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

**LOXONE VERSIONS ONLINE**
weverducre.com/more-ray



**RESTAURANT GOLDMARIE | LUKAS NOBILI** MAINZ GERMANY

# ODREY

*High* voltage
*Ceiling* suspended












## 1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

| | CHF | CODE |
|---|---|---|
| | 231,85 | 287120WW0 |
| | 231,85 | 287120GG0 |
| | 231,85 | 287120QQ0 |
| | 231,85 | 287120BL0 |
| | 231,85 | 287120BG0 |
| | 231,85 | 287120BB0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

| | CHF | CODE |
|---|---|---|
| | 233,25 | 287320WW0 |
| | 233,25 | 287320GG0 |
| | 233,25 | 287320QQ0 |
| | 233,25 | 287320BL0 |
| | 233,25 | 287320BG0 |
| | 233,25 | 287320BB0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## CHOOSE YOUR BASE

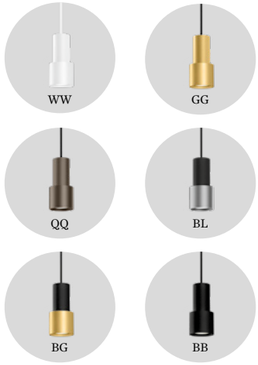


**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110G0 |
| | 40,05 | 914110Q0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528



**HOTEL MEERBERG** PERTISAU | AUSTRIA

# ODREY

*High* voltage
*Ceiling* suspended



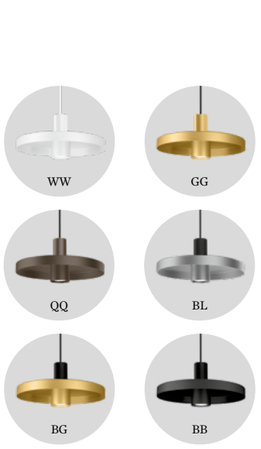








353 | 379






599

## 1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110G0 |
| | 40,05 | 914110Q0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

| | CHF | CODE |
|---|---|---|
| | 322,95 | 287220WW0 |
| | 322,95 | 287220GG0 |
| | 322,95 | 287220QQ0 |
| | 322,95 | 287220BL0 |
| | 322,95 | 287220BG0 |
| | 322,95 | 287220BB0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905


nourishing
food inside.
ESPRESSO
AMERICANO
FILTER
CAPPUCCINO
FLAT WHITE
LATTE
CAKE
RAW CAKE





CECI PICCOLA CUCINA | STUDIOZERO85 PESCARA | ITALY


WW


GG


QQ


BL


BG


BB

# ODREY

*High* voltage
*Ceiling* suspended















353 | 379




599

## 1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

## 1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

## 1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110G0 |
| | 40,05 | 914110Q0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

| | CHF | CODE |
|---|---|---|
| | 242,90 | 287420WW0 |
| | 242,90 | 287420GG0 |
| | 242,90 | 287420QQ0 |
| | 242,90 | 287420BL0 |
| | 242,90 | 287420BG0 |
| | 242,90 | 287420BB0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

| | CHF | CODE |
|---|---|---|
| | 247,05 | 287520WW0 |
| | 247,05 | 287520GG0 |
| | 247,05 | 287520QQ0 |
| | 247,05 | 287520BL0 |
| | 247,05 | 287520BG0 |
| | 247,05 | 287520BB0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

| | CHF | CODE |
|---|---|---|
| | 248,40 | 287620WW0 |
| | 248,40 | 287620GG0 |
| | 248,40 | 287620QQ0 |
| | 248,40 | 287620BL0 |
| | 248,40 | 287620BG0 |
| | 248,40 | 287620BB0 |

optional inner cover on page 910

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**RESTAURANT WEINTRÄNE | MICHAEL FALTENBACHER CREATION & CONCEPT** MUNICH | GERMANY

reddot winner 2023

# TRACE

*High* voltage
*Ceiling* suspended

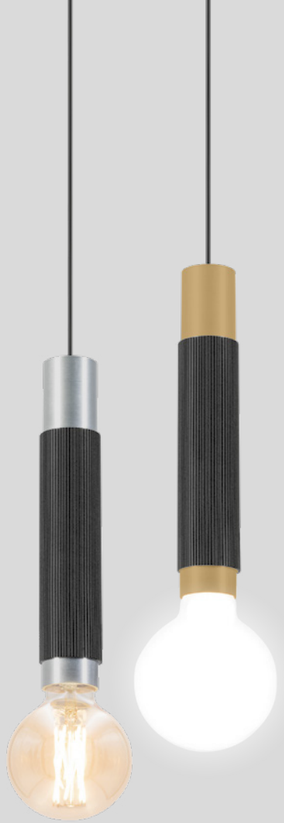







## 1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

| | CHF | CODE |
|---|---|---|
| | 162,85 | 2538E0W0 |
| | 168,40 | 2538E0BL0 |
| | 168,40 | 2538E0BM0 |
| | 162,85 | 2538E0B0 |

## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110M0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

## OPTIONAL

G95 4.5W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 375lm | 45,55 | 9003E160 |

G95 10W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

G95 5.4W | E27 | phase-cut dim
filament | gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 380lm | 45,55 | 9003E111 |



**PRIVATE RESIDENCE | STUDIO BENOIT** BELGIUM

# WETRO

*High* voltage
*Ceiling* suspended



## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

**LOXONE VERSIONS ONLINE**
weverducre.com/wetro




### 1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 375lm

| | CHF | CODE |
|---|---|---|
| | 412,65 | 236188P9 |

1800-2850K | >90 CRI | 525lm

| | CHF | CODE |
|---|---|---|
| | 411,25 | 236188B9 |




### 2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 385lm

| | CHF | CODE |
|---|---|---|
| | 465,10 | 236288P9 |

1800-2850K | >90 CRI | 510lm

| | CHF | CODE |
|---|---|---|
| | 463,70 | 236288B9 |




### 3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 445lm

| | CHF | CODE |
|---|---|---|
| | 539,60 | 236388P9 |

1800-2850K | >90 CRI | 530lm

| | CHF | CODE |
|---|---|---|
| | 538,20 | 236388B9 |



PRIVATE RESIDENCE BELGIUM



# WETRO

*High* voltage
*Ceiling* suspended

## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110B0 |




**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

**LOXONE VERSIONS ONLINE**
weverducre.com/wetro

### 1.0




LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 615lm

| | CHF | CODE |
|---|---|---|
| | 466,45 | 236188TS9 |

### 2.0




LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 510lm

| | CHF | CODE |
|---|---|---|
| | 571,35 | 236288TS9 |

### 3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 530lm

| | CHF | CODE |
|---|---|---|
| | 652,75 | 236388TS9 |



# WETRO

*High* voltage
*Ceiling* suspended

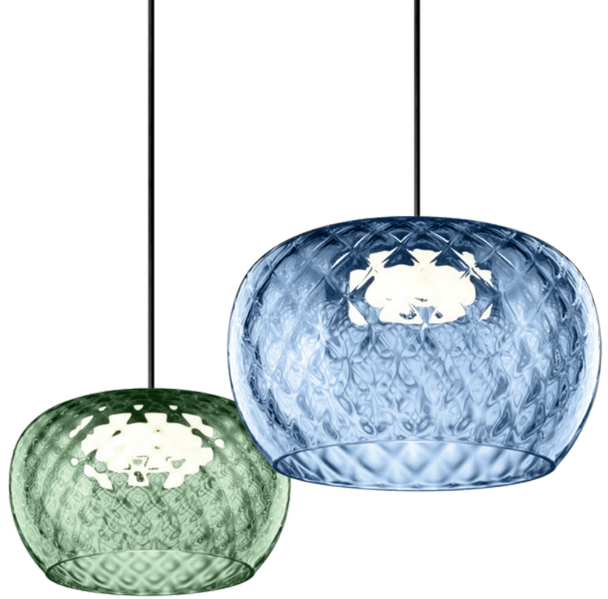










## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

**LOXONE VERSIONS ONLINE**
weverducre.com/wetro

## 1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 520lm

| | CHF | CODE |
|---|---|---|
| | 466,45 | 236188TD9 |
| | 466,45 | 236188YD9 |
| | 466,45 | 236188GD9 |
| | 466,45 | 236188BD9 |

## 2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 480lm

| | CHF | CODE |
|---|---|---|
| | 571,35 | 236288TD9 |
| | 571,35 | 236288YD9 |
| | 571,35 | 236288GD9 |
| | 571,35 | 236288BD9 |

## 3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 495lm

| | CHF | CODE |
|---|---|---|
| | 652,75 | 236388TD9 |
| | 652,75 | 236388YD9 |
| | 652,75 | 236388GD9 |
| | 652,75 | 236388BD9 |



**PRIVATE RESIDENCE | ANA TERRA** ITALY

# WETRO

*High* voltage
*Ceiling* suspended






## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110Q0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

**LOXONE VERSIONS ONLINE**
weverducre.com/wetro




## 1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 495lm

| | CHF | CODE |
|---|---|---|
| | 466,45 | 236188TW9 |

1800-2850K | CRI >90 | 455lm

| | CHF | CODE |
|---|---|---|
| | 466,45 | 236188DW9 |




## 2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 435lm

| | CHF | CODE |
|---|---|---|
| | 571,35 | 236288TW9 |

1800-2850K | CRI >90 | 420lm

| | CHF | CODE |
|---|---|---|
| | 571,35 | 236288DW9 |




## 3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 455lm

| | CHF | CODE |
|---|---|---|
| | 652,75 | 236388TW9 |

1800-2850K | CRI >90 | 440lm

| | CHF | CODE |
|---|---|---|
| | 652,75 | 236388DW9 |



PRIVATE RESIDENCE | MD STUDIO MARIA DECU ROMANIA

# CLEA

*High* voltage
*Ceiling* suspended



287
631




## 1.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 405,75 | 281784W_ |
| | 436,10 | 281784SG_ |
| | 436,10 | 281784FJ_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 780 | >90 | 3 |
| 3000K | 825 | >90 | 5 |




## 2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 598,95 | 281884W_ |
| | 643,10 | 281884SG_ |
| | 643,10 | 281884FJ_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 780 | >90 | 3 |
| 3000K | 825 | >90 | 5 |




## 3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 764,55 | 281984W_ |
| | 811,45 | 281984SG_ |
| | 811,45 | 281984FJ_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 770 | >90 | 3 |
| 3000K | 815 | >90 | 5 |

## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528



**PRIVATE RESIDENCE** GREECE

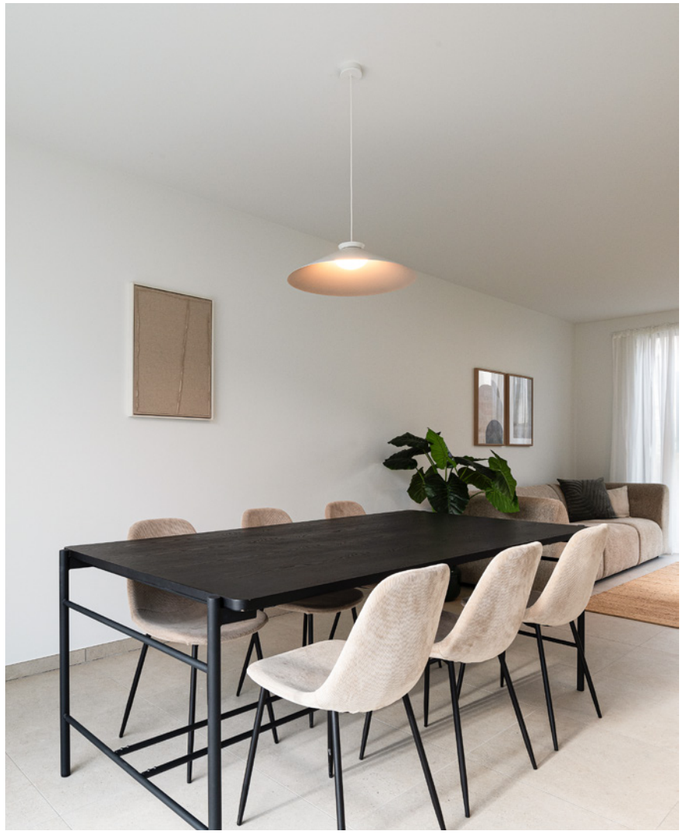

**PRIVATE RESIDENCE | ERIBO STIJLBOUWERS** BELGIUM



**PRIVATE RESIDENCE | ARCHITEKTI MIKULAJ & MIKULAJOVA** SLOVAKIA

# SHIEK

*High* voltage
*Ceiling* suspended









## 3.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 710lm

| | CHF | CODE |
|---|---|---|
| | 356,05 | 237388W9 |
| | 361,60 | 237388J9 |
| | 361,60 | 237388SG9 |
| | 361,60 | 237388ME9 |
| | 361,60 | 237388P9 |
| | 361,60 | 237388K9 |
| | 361,60 | 237388Z9 |

## 3.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium
white cable on request

IP20

| | CHF | CODE |
|---|---|---|
| | 241,50 | 2343E0W0 |
| | 247,05 | 2343E0J0 |
| | 247,05 | 2343E0SG0 |
| | 247,05 | 2343E0ME0 |
| | 247,05 | 2343E0P0 |
| | 247,05 | 2343E0K0 |
| | 247,05 | 2343E0Z0 |

## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
**DH | Multi base round**
**EH | Multi base linear**
**FH | Multi chandelier**
**GH | Track adapter**
**IH | Wall base**
more infos on page 528

## OPTIONAL

A60 9W opal | E27 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-shiek



**PRIVATE RESIDENCE | ZEIT ARCHITECTS** SLOVAKIA

# DINOR

*High* voltage
*Ceiling* suspended












## CHOOSE YOUR BASE

**AH | Single base**
ceiling base round | ø83

| | CHF | CODE |
|---|---|---|
| | 40,05 | 914110W0 |
| | 40,05 | 914110L0 |
| | 40,05 | 914110B0 |

**BH | Semi recessed single base**
**CH | Invisible single base**
more infos on page 528

**LOXONE VERSIONS ONLINE**
weverducre.com/more-dinor

### 1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|60K

1800-2850K | CRI >90 | 570lm

| | CHF | CODE |
|---|---|---|
| | 531,30 | 255188GW9 |
| | 531,30 | 255188BG9 |
| | 507,85 | 255188BB9 |

### 2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|60K

1800-2850K | CRI >90 | 750lm

| | CHF | CODE |
|---|---|---|
| | 627,90 | 255288GW9 |
| | 627,90 | 255288BG9 |
| | 586,50 | 255288BB9 |

### 3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|60K

1800-2850K | CRI >90 | 830lm

| | CHF | CODE |
|---|---|---|
| | 712,10 | 255388GW9 |
| | 712,10 | 255388BG9 |
| | 666,55 | 255388BB9 |





**RESTAURANT VINA | INNOCAD ARCHITECTURE** GRAZ | AUSTRIA

# *Wall* recessed

566 – 581

## SPOT LIGHTS



**LECA SNOOZE**
569



**MATCH SNOOZE**
571

## GUIDE LIGHTS



**RETO 0.8**
573



**RETO 2.0**
573



**LITO 1.0**
575



**LITO 2.0**
575



**STRIPE SLIM**
577



**STRIPE**
579



**ORIS 0.7**
581



**ORIS 0.8**
581



**ORIS 1.3**
581

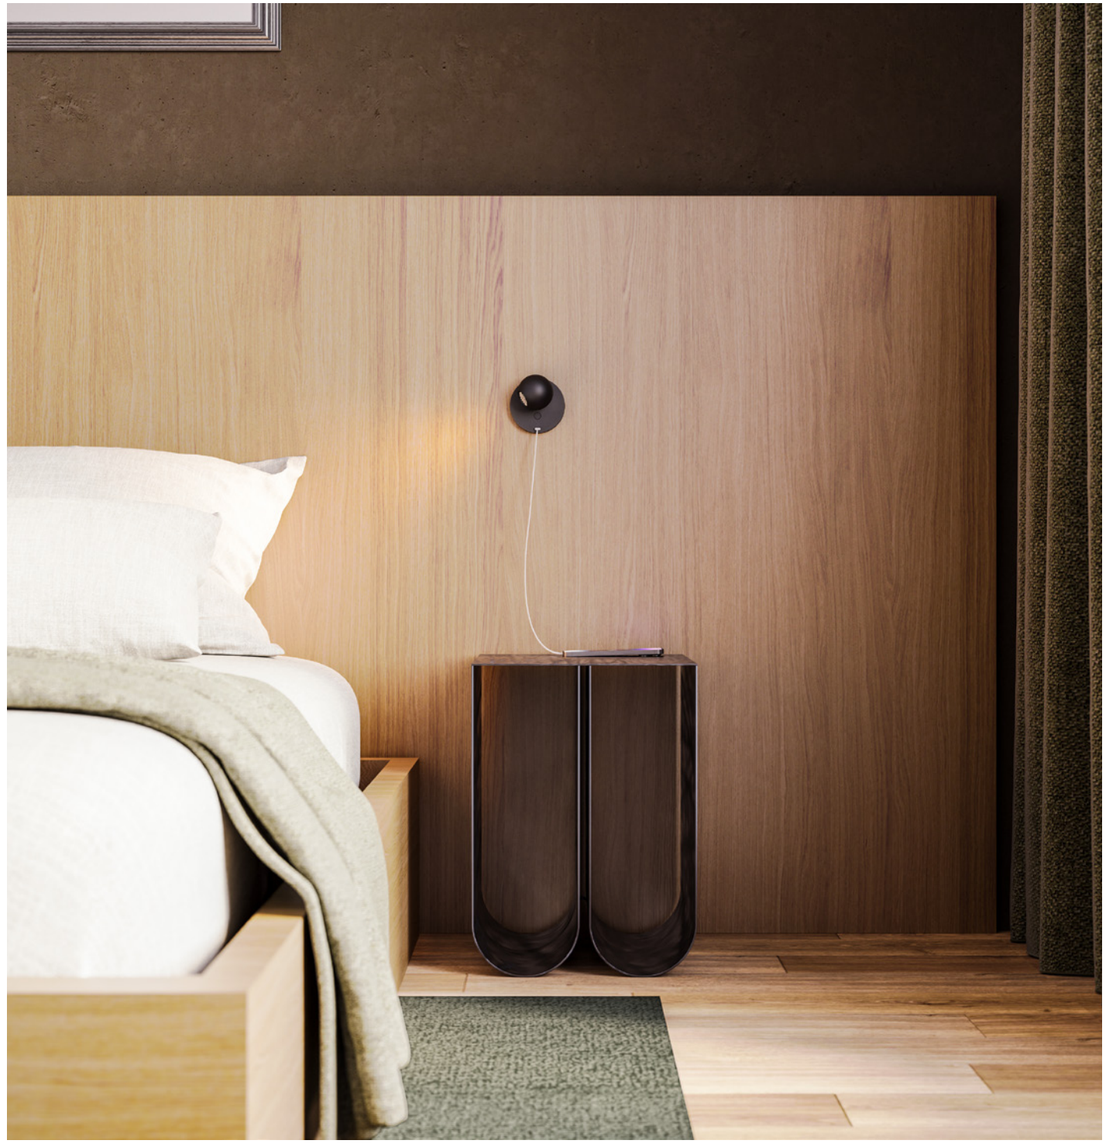

# LECA snooze

*Wall* recessed










## 1.0 SEMI RECESSED

LED COB 5W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
USB-C port | incl. honeycomb
fits standard installation box ø 68

IP20 0°-90°|350° N-17° L80|50K

68-71 36 5-40

2700K | CRI >90 | 240lm

| | CHF | CODE |
|---|---|---|
| | 379,50 | 188544W3 |
| | 407,10 | 188544Q3 |
| | 379,50 | 188544B3 |





**PRIVATE RESIDENCE | STUDIO BINNEN** NETHERLANDS

# MATCH snooze

*Wall* recessed









## 1.0 SEMI RECESSED

LED COB 4W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
USB-C port | installation box

IP20 0°-90°|350° M-23° L80|50K

41x190 55 12.5-32.5

2700K | CRI >90 | 240lm

| | CHF | CODE |
|---|---|---|
| | 379,50 | 177554W3 |
| | 407,10 | 177554L3 |
| | 407,10 | 177554M3 |
| | 407,10 | 177554Q3 |
| | 379,50 | 177554B3 |




## 1.1 SEMI RECESSED

LED COB 4W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
installation box

IP20 0°-90°|350° M-23° L80|50K

41x190 55 12.5-32.5

2700K | CRI >90 | 240lm

| | CHF | CODE |
|---|---|---|
| | 338,10 | 177654W3 |
| | 338,10 | 177654B3 |


*Wall* recessed 61 | 137 | 153
193
329 | 347
415 | 509
589 | 685
723 | 729



**PRIVATE RESIDENCE | STUDIO PALINPERÄ** FINLAND

# RETO

*Wall* recessed







## 0.8

LED PCB 4W | 350mA | 9V
aluminium

IP20 L80|50K

66x66 L40 min. 12

3000K | CRI >90 | 145lm

| | CHF | CODE |
|---|---|---|
| | 113,20 | 3451A1W5 |
| | 135,25 | 3451A1L5 |
| | 135,25 | 3451A1M5 |
| | 135,25 | 3451A1Q5 |
| | 113,20 | 3451A1B5 |

## 2.0

LED PCB 6W | 350mA | 17V
aluminium

IP20 L80|50K

47x182 L40 min. 12

3000K | CRI >90 | 455lm

| | CHF | CODE |
|---|---|---|
| | 168,40 | 3452A1W5 |
| | 168,40 | 3452A1B5 |

## ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 48,30 | 90213202 |

more options and specs on page 896

## ALWAYS USE

driver | 350mA

| | CHF | CODE |
|---|---|---|
| 6W | 48,30 | 90213202 |

more options and specs on page 896

## OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 63,50 | 90012047 |

concrete housing

| | CHF | CODE |
|---|---|---|
| | 44,20 | 90012046 |

specs on page 914

## OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 62,10 | 90012039 |

concrete housing

| | CHF | CODE |
|---|---|---|
| | 52,45 | 90012044 |

specs on page 914





**LOXONE VERSION ONLINE**
weverducre.com/more-reto

781

835



**PRIVATE RESIDENCE | BAUBUREAU OG 27 AG | LINEAR 54** SWITZERLAND



**LOXONE VERSION ONLINE**
weverducre.com/more-lito

LAMP-CONCEPT.CH

# LITO

*Wall* recessed







## 1.0

LED PCB 2/3W | 350/500mA | 6V
aluminium | anod.

IP20 L80|60K

70x70 35 min. 12

3000K | CRI >90 | 170/235lm

| | CHF | CODE |
|---|---|---|
| | 85,60 | 145381W5 |
| | 85,60 | 145381A5 |
| | 85,60 | 145381B5 |

### ALWAYS USE

driver

| | CHF | CODE |
|---|---|---|
| 6W \| 350mA | 48,30 | 90213202 |
| 6W \| 500mA | 45,55 | 90214201 |

more options and specs on page 896

### OPTIONAL

| | CHF | CODE |
|---|---|---|
| recessed housing | 36,60 | 90012027 |
| plasterkit | 22,80 | 90017119 |

recessed housing | always use in combination with plasterkit

## 2.0

LED PCB 2/3W | 350/500mA | 6V
aluminium | anod.

IP20 L80|60K

70x70 35 min. 12

3000K | CRI >90 | 85/115lm

| | CHF | CODE |
|---|---|---|
| | 85,60 | 1454A1W5 |
| | 85,60 | 1454A1A5 |
| | 85,60 | 1454A1B5 |

### ALWAYS USE

driver

| | CHF | CODE |
|---|---|---|
| 6W \| 350mA | 48,30 | 90213202 |
| 6W \| 500mA | 45,55 | 90214201 |

more options and specs on page 896

### OPTIONAL

| | CHF | CODE |
|---|---|---|
| recessed housing | 36,60 | 90012027 |
| plasterkit | 22,80 | 90017119 |

recessed housing | always use in combination with plasterkit

back

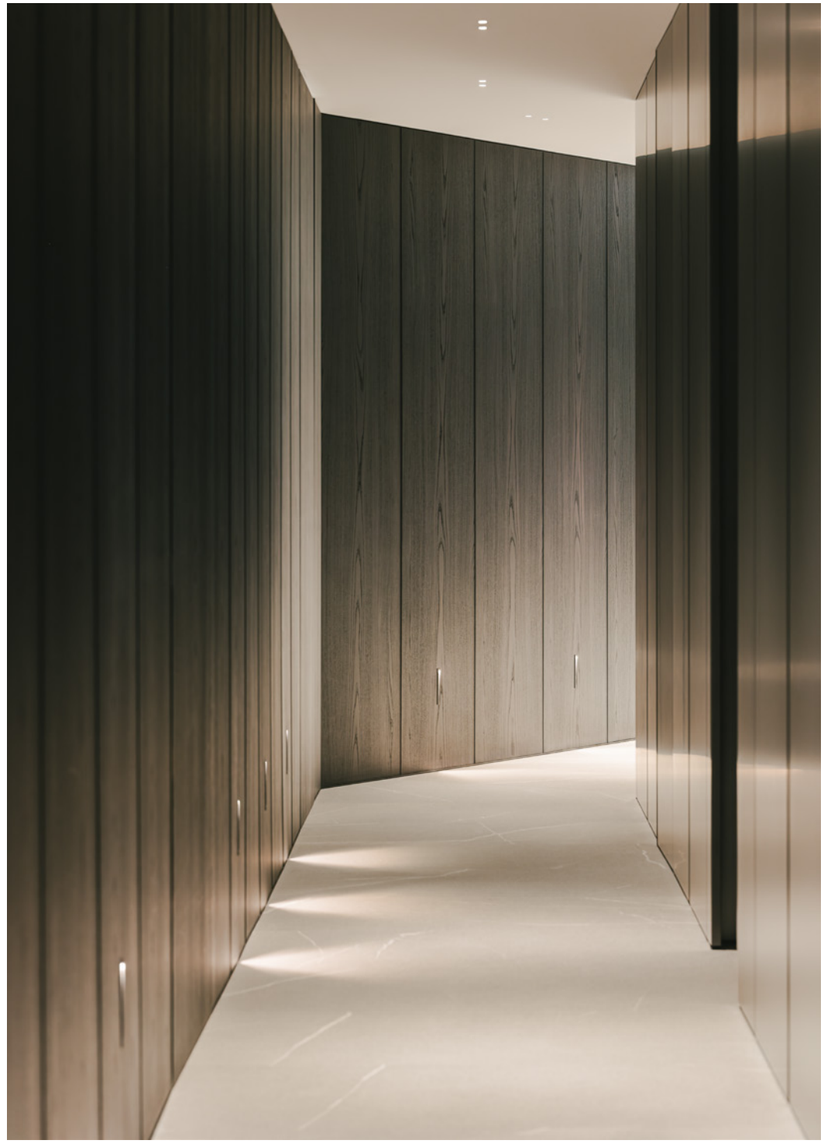

**PRIVATE RESIDENCE** SPAIN

# STRIPE SLIM

*Wall* recessed




## 1.4

LED PCB 2W | const. volt. | 24V
aluminium

IP20 L70|60K

135x9 18 8-18

3000K | CRI >80 | 15lm

| | CHF | CODE |
|---|---|---|
| | 93,85 | 3058A1W5 |
| | 93,85 | 3058A1B5 |



## ALWAYS USE

driver | phase-cut dim
min. 2 luminaires per driver

| | CHF | CODE |
|---|---|---|
| 25W | 63,50 | 90222701 |

revision opening required

more options and specs on page 901



**PRIVATE RESIDENCE | KILLIAN GARTNER - ROOMS ATELIER** AUSTRIA

# STRIPE

*Wall* recessed



**LOXONE VERSION ONLINE**
weverducre.com/more-stripe




## 0.4

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x56 40 8-18

3000K | CRI >80 | 15/28lm

| | CHF | CODE |
|---|---|---|
| | 75,90 | 3054A1WA4 |
| | 77,30 | 3054A1LA4 |
| | 77,30 | 3054A1GA4 |
| | 75,90 | 3054A1BA4 |

### ALWAYS USE

driver

| | CHF | CODE |
|---|---|---|
| 6W \| 350mA | 48,30 | 90213202 |
| 6W \| 700mA | 47,65 | 90215203 |

more options and specs on page 896

### OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 33,15 | 90012037 |

driver to be placed externally
specs on page 914




## 0.7

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x56 40 8-18

3000K | CRI >80 | 15/28lm

| | CHF | CODE |
|---|---|---|
| | 80,05 | 3055A1WA4 |
| | 81,45 | 3055A1LA4 |
| | 81,45 | 3055A1GA4 |
| | 80,05 | 3055A1BA4 |

### ALWAYS USE

driver

| | CHF | CODE |
|---|---|---|
| 6W \| 350mA | 48,30 | 90213202 |
| 6W \| 700mA | 47,65 | 90215203 |

more options and specs on page 896

### OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 33,15 | 90012037 |

driver to be placed externally
specs on page 914




## 2.2

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x170 40 8-18

3000K | CRI >80 | 20/36lm

| | CHF | CODE |
|---|---|---|
| | 121,45 | 3056A1WA4 |
| | 122,85 | 3056A1LA4 |
| | 122,85 | 3056A1GA4 |
| | 121,45 | 3056A1BA4 |

### ALWAYS USE

driver

| | CHF | CODE |
|---|---|---|
| 6W \| 350mA | 48,30 | 90213202 |
| 6W \| 700mA | 47,65 | 90215203 |

more options and specs on page 896

### OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 59,35 | 90012038 |

specs on page 914



**MAISON BUDISM COUTURE | PEERUTIN KAROL ARCHITECTS** CAPETOWN | SOUTH AFRICA

# ORIS

*Wall* recessed














## 0.7

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP20 L70|60K

47x182 40 min. 12

3000K | CRI >90 | 70/120lm

| | CHF | CODE |
|---|---|---|
| | 104,90 | 3271A1W5 |
| | 104,90 | 3271A1B5 |

### ALWAYS USE

driver

| | CHF | CODE |
|---|---|---|
| 6W \| 350mA | 48,30 | 90213202 |
| 6W \| 700mA | 47,65 | 90215203 |

more options and specs on page 896

### OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 62,10 | 90012039 |

concrete housing

| | CHF | CODE |
|---|---|---|
| | 52,45 | 90012044 |

specs on page 914

## 0.8

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP20 L70|60K

66x66 40 min. 12

3000K | CRI >90 | 90/150lm

| | CHF | CODE |
|---|---|---|
| | 93,85 | 3274A1W5 |
| | 93,85 | 3274A1B5 |

### ALWAYS USE

driver

| | CHF | CODE |
|---|---|---|
| 6W \| 350mA | 48,30 | 90213202 |
| 6W \| 700mA | 47,65 | 90215203 |

more options and specs on page 896

### OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 63,50 | 90012047 |

concrete housing

| | CHF | CODE |
|---|---|---|
| | 44,20 | 90012046 |

specs on page 914

## 1.3

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP20 L70|60K

115x117 40 min. 12

3000K | CRI >90 | 145/220lm

| | CHF | CODE |
|---|---|---|
| | 122,85 | 3276A1W5 |
| | 122,85 | 3276A1B5 |

### ALWAYS USE

driver

| | CHF | CODE |
|---|---|---|
| 6W \| 350mA | 48,30 | 90213202 |
| 7W \| 700mA | 50,40 | 90215301 |

more options and specs on page 896

### OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 71,80 | 90012041 |

concrete housing

| | CHF | CODE |
|---|---|---|
| | 53,85 | 90012040 |

specs on page 914

**LOXONE VERSION ONLINE**
weverducre.com/more-oris

785

# *Wall* surface

582 — 711

## LUMINAIRES



CENO
585



MATCH
589



TRACE MINI
591



TRACE
593



TRACE SLIM
595



ODREY
599



BOX MINI
605



BOX
607



DOCUS MINI
609



HEXO MINI
611



RAY MINI
613



RAY
615



CENTRAL
617



LEENS
619



BENTO
621



DRO
623



MIRRO
625



MIRRO SOFT
629



CLEA
631



J.J.W.
633



ROOMOR
639



DARF
643



CG SQUARE
647



DOT
649



TAPIS
651



TAPIS SOFT
657



MILES ROUND
663



MILES CARRÉ
667



MILES
669



LARRA
671



FINLIN
673



FINLIN ROUND
679



FIL SPIN
681



VENN
683

## SPOT LIGHTS



MATCH SNOOZE
685



MICK SNOOZE
687



SARA SNOOZE
689



MICK WALL 1.0
691

## UPLIGHTS



DOMINO
693



SCAVA
695

## IP-RATED



HAJO IP44
697



PERLEZ IP44
701



PERLEZ CLIP IP44
703



MIRBA IP44
705



MIRBI LONG IP44
707



RIBELLE IP65
709



PAVIO IP65
711



**FRENCH VILLAGE CAFÉ & BISTRO | LARA WOODS WOZNICA** BELFAST | UNITED KINGDOM

# CENO

*Wall* surface








## 2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-3T° L70|55K

| | CHF | CODE |
|---|---|---|
| | 269,10 | 376264W_ |
| | 269,10 | 376264Q_ |
| | 269,10 | 376264CH_ |
| | 269,10 | 376264B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x260 | >90 | 3 |
| 3000K | 2x270 | >90 | 5 |




## OPTIONAL

honeycomb louver

| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-ceno-wall





**OFFICE REAZN | STUDIO BENOIT** KRUISEM | BELGIUM

reddot winner 2023

# MATCH

*Wall* surface

61 | 137 | 153
193
329 | 347
415 | 509
571
723 | 729

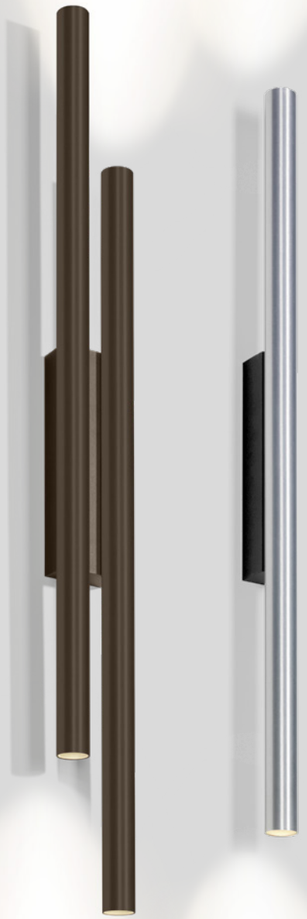







## 2.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-Z5° L80|50K

| | CHF | CODE |
|---|---|---|
| | 260,85 | 377264W_ |
| | 260,85 | 377264BL_ |
| | 260,85 | 377264Q_ |
| | 260,85 | 377264B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x415 | >90 | 3 |
| 3000K | 2x440 | >90 | 5 |

## 4.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-Z5° L80|50K

| | CHF | CODE |
|---|---|---|
| | 397,45 | 377464W_ |
| | 397,45 | 377464Q_ |
| | 397,45 | 377464B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x415 | >90 | 3 |
| 3000K | 4x440 | >90 | 5 |





DESIGN AWARD 2024

reddot winner 2023

# TRACE mini

*Wall* surface



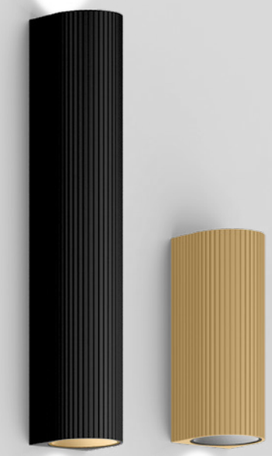










## 1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

| | CHF | CODE |
|---|---|---|
| | 241,50 | 333654W_ |
| | 245,65 | 333654MB_ |
| | 245,65 | 333654BM_ |
| | 241,50 | 333654B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 420 | >90 | 3 |
| 3000K | 420 | >90 | 5 |

## 2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

| | CHF | CODE |
|---|---|---|
| | 320,20 | 333754W_ |
| | 328,45 | 333754MB_ |
| | 328,45 | 333754BM_ |
| | 320,20 | 333754B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 840 | >90 | 3 |
| 3000K | 840 | >90 | 5 |



DESIGN AWARD 2024

reddot winner 2023

# TRACE

*Wall* surface

261 | 269 | 273

351

511 | 547

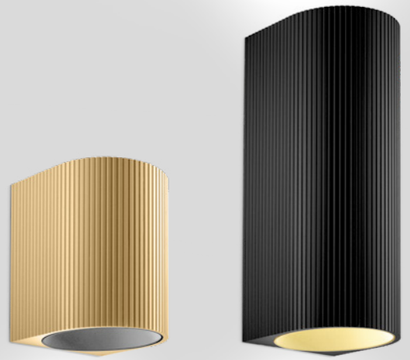










## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-22° L80|50K

| | CHF | CODE |
|---|---|---|
| | 255,30 | 333164W_ |
| | 259,45 | 333164H_ |
| | 259,45 | 333164CH_ |
| | 255,30 | 333164B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 575 | >90 | 3 |
| 3000K | 645 | >90 | 5 |

## 2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-22° L80|50K

| | CHF | CODE |
|---|---|---|
| | 347,80 | 333264W_ |
| | 356,05 | 333264H_ |
| | 356,05 | 333264CH_ |
| | 347,80 | 333264B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x560 | >90 | 3 |
| 3000K | 2x615 | >90 | 5 |



OFFICE | ALFA ARCHITECTES LYON | FRANCE

DESIGN AWARD 2024

reddot winner 2023

# TRACE SLIM

*Wall* surface

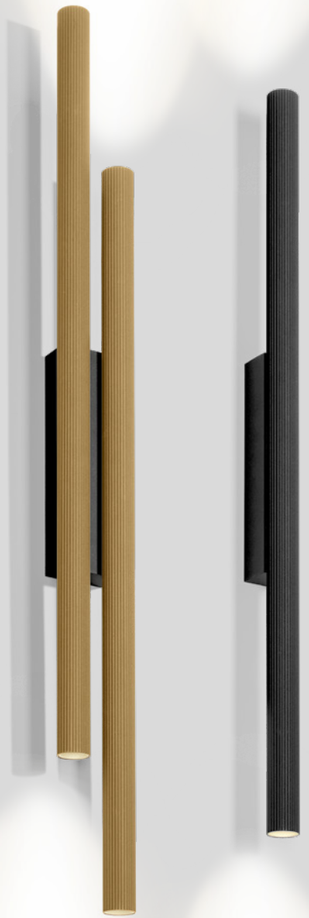



261 | 269 | 273



351



511 | 547







## 1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-23° L80|50K

| | CHF | CODE |
|---|---|---|
| | 302,25 | 333364CH_ |
| | 296,70 | 333364B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x395 | >90 | 3 |
| 3000K | 2x420 | >90 | 5 |

## 2.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-23° L80|50K

| | CHF | CODE |
|---|---|---|
| | 467,85 | 333464CH_ |
| | 452,65 | 333464B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 4x395 | >90 | 3 |
| 3000K | 4x420 | >90 | 5 |







**PRIVATE RESIDENCE | TIPHAINE MODIN** FRANCE

# ODREY

*Wall* surface






**MORE VERSIONS ONLINE**
weverducre.com/more-odrey-wall




## 1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 186,30 | 387120WW0 |
| | 186,30 | 387120QQ0 |
| | 186,30 | 387120GB0 |
| | 186,30 | 387120BL0 |
| | 186,30 | 387120BG0 |
| | 186,30 | 387120BB0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905




## 1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 196,00 | 387220WW0 |
| | 196,00 | 387220QQ0 |
| | 196,00 | 387220GB0 |
| | 196,00 | 387220BL0 |
| | 196,00 | 387220BG0 |
| | 196,00 | 387220BB0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905




## 1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 200,10 | 387320WW0 |
| | 200,10 | 387320QQ0 |
| | 200,10 | 387320GB0 |
| | 200,10 | 387320BL0 |
| | 200,10 | 387320BG0 |
| | 200,10 | 387320BB0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

353 | 379

517 | 539



CABINET DENTAIRE VAUBAN | **DAHDAH STUDIO** VAUBAN | FRANCE

# ODREY

*Wall* surface

353 | 379

517 | 539

3D












## 2.3

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 253,95 | 387420WW0 |
| | 253,95 | 387420QQ0 |
| | 253,95 | 387420GB0 |
| | 253,95 | 387420BL0 |
| | 253,95 | 387420BG0 |
| | 253,95 | 387420BB0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.4

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 273,25 | 387520WW0 |
| | 273,25 | 387520QQ0 |
| | 273,25 | 387520GB0 |
| | 273,25 | 387520BL0 |
| | 273,25 | 387520BG0 |
| | 273,25 | 387520BB0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.5

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

| | CHF | CODE |
|---|---|---|
| | 281,55 | 387620WW0 |
| | 281,55 | 387620QQ0 |
| | 281,55 | 387620GB0 |
| | 281,55 | 387620BL0 |
| | 281,55 | 387620BG0 |
| | 281,55 | 387620BB0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



















**MORE VERSIONS ONLINE**
weverducre.com/more-odrey-wall

# stars

weverducre.com/universalstars

SIMPLE FORMALITY

Auch wenn Mathematik nicht Ihr Lieblingsfach war: BOX, DOCUS, HEXO und RAY werden Sie begeistern. Die eleganten, schlanken Leuchten passen in fast jede Raumsituation – ob an Decke oder Wand, innen oder außen. In vielen Farben und Varianten erhältlich, sorgen sie überall für einen echten Wow-Effekt.

Même si les mathématiques n'étaient pas votre matière préférée, BOX, DOCUS, HEXO et RAY sauront vous séduire. Élégants et fins, ces luminaires s'adaptent à presque tous les espaces – plafond ou mur, intérieur ou extérieur. Disponibles en de nombreuses versions et couleurs, ils créent partout un véritable effet « wow ».



BOX



DOCUS



HEXO



RAY

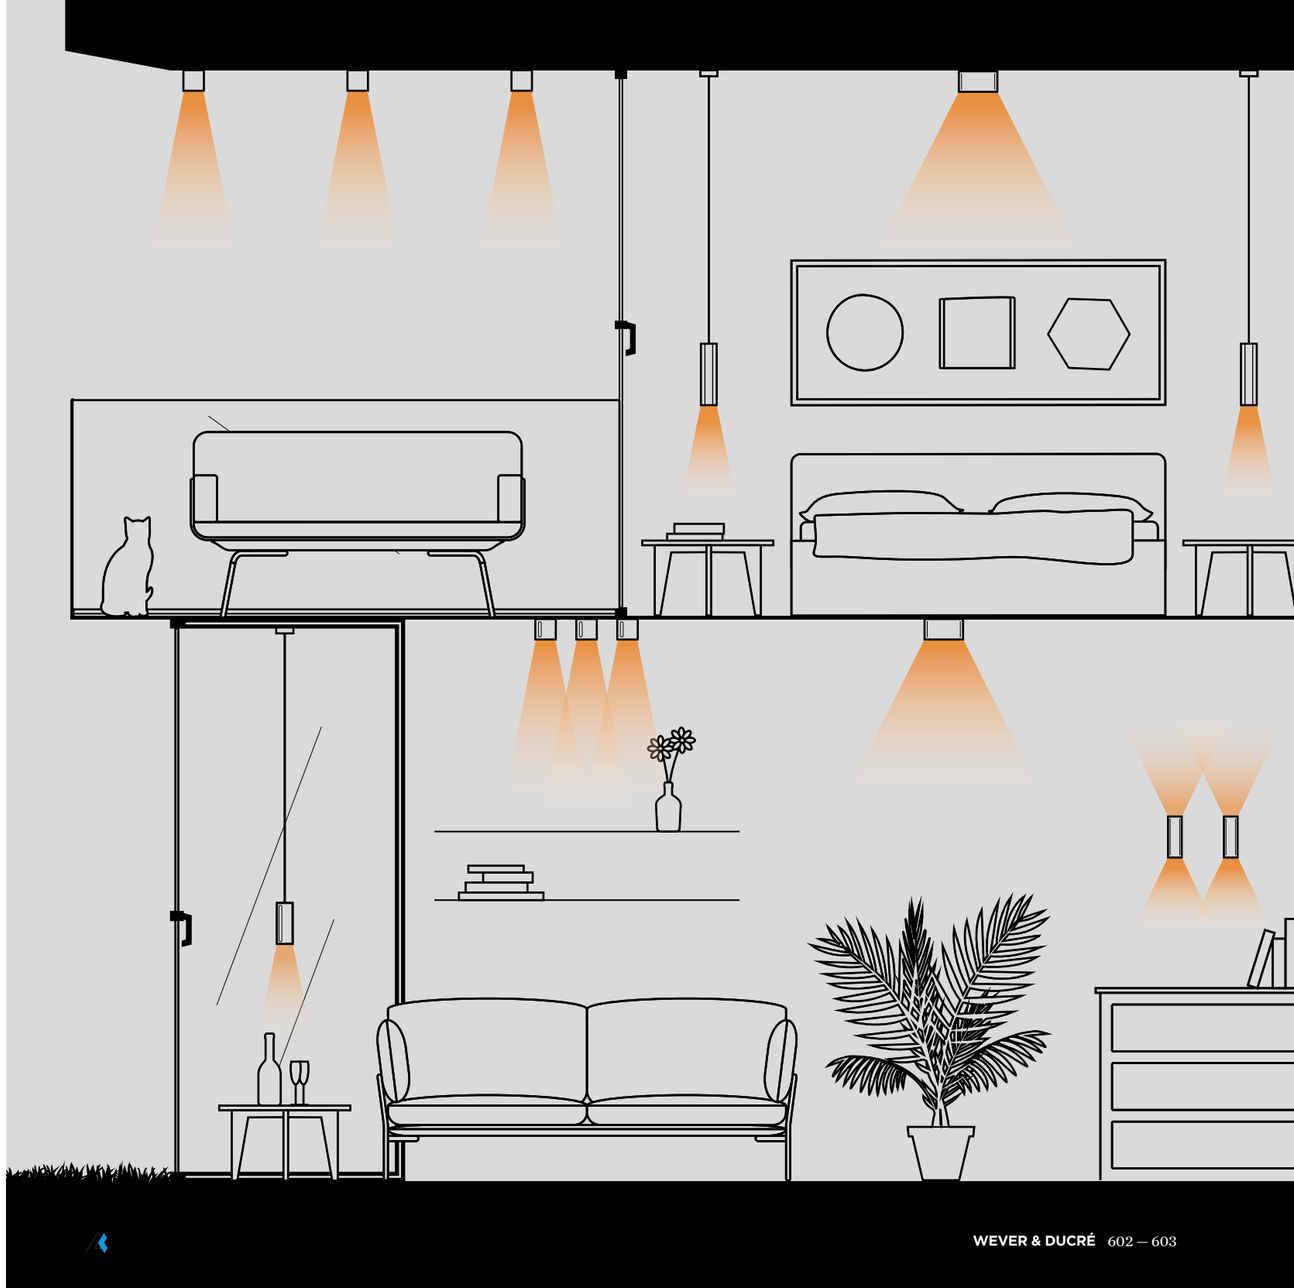



**PRIVATE RESIDENCE** BELGIUM

# BOX mini

*Wall* surface

231

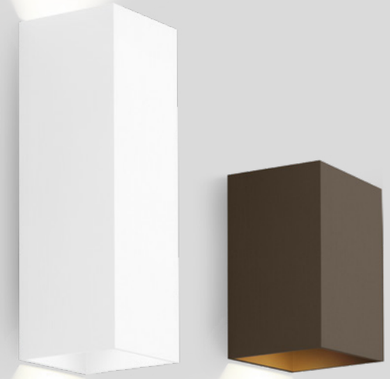







## 1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 92,50 | 300120W0 |
| | 93,85 | 300120L0 |
| | 93,85 | 300120G0 |
| | 93,85 | 300120M0 |
| | 93,85 | 300120Q0 |
| | 92,50 | 300120B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 121,45 | 301120W0 |
| | 124,20 | 301120L0 |
| | 124,20 | 301120G0 |
| | 124,20 | 301120M0 |
| | 124,20 | 301120Q0 |
| | 121,45 | 301120B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



PRIVATE RESIDENCE | THE ART OF LIVING MAGAZINE THE NETHERLANDS

# BOX

*Wall* surface














## 1.0 LED

LED PCB 6W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

| | CHF | CODE |
|---|---|---|
| | 265,65 | 341168W_ |
| | 269,80 | 341168L_ |
| | 269,80 | 341168G_ |
| | 269,80 | 341168M_ |
| | 269,80 | 341168Q_ |
| | 265,65 | 341168B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 350 | >90 | 3 |
| 3000K | 370 | >90 | 5 |
| 1800-2850K | 330 | >90 | 9 |

## 2.0 LED

LED PCB 11W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

| | CHF | CODE |
|---|---|---|
| | 298,10 | 341148W_ |
| | 302,25 | 341148L_ |
| | 302,25 | 341148G_ |
| | 302,25 | 341148M_ |
| | 302,25 | 341148Q_ |
| | 298,10 | 341148B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x440 | >90 | 3 |
| 3000K | 2x460 | >90 | 5 |
| 1800-2850K | 2x410 | >90 | 9 |

## 1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 150,45 | 3211G0W0 |
| | 154,60 | 3211G0L0 |
| | 154,60 | 3211G0G0 |
| | 154,60 | 3211G0M0 |
| | 154,60 | 3211G0Q0 |
| | 150,45 | 3211G0B0 |

## OPTIONAL

flaps for adjustable beam angle

| | CHF | CODE |
|---|---|---|
| | 53,85 | 900401W0 |

QT14 3.5W | G9 | phase-cut dim clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 340lm | 24,85 | 9010G803 |
| 3000K \| 350lm | 24,85 | 9010G805 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-box-wall

235
335
765
815



**PRIVATE RESIDENCE | PROVENZANO ARCHITETTI ASSOCIATI GUILA LUPO** ITALY

# DOCUS mini

*Wall* surface











## 1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 92,50 | 300320W0 |
| | 93,85 | 300320G0 |
| | 92,50 | 300320B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 122,85 | 301320W0 |
| | 125,60 | 301320G0 |
| | 122,85 | 301320B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



PRIVATE RESIDENCE | MOOSEBERRY DESIGN GROUP UKRAINE

# HEXO mini

*Wall* surface



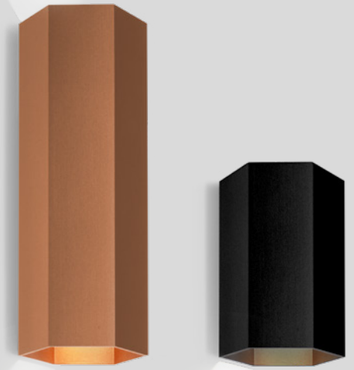







## 1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 93,85 | 300420G0 |
| | 93,85 | 300420Q0 |
| | 93,85 | 300420P0 |
| | 92,50 | 300420B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 125,60 | 301420G0 |
| | 125,60 | 301420Q0 |
| | 125,60 | 301420P0 |
| | 122,85 | 301420B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**PRIVATE RESIDENCE | DÉVÉ CREATIONS** THE NETHERLANDS

# RAY mini

*Wall* surface

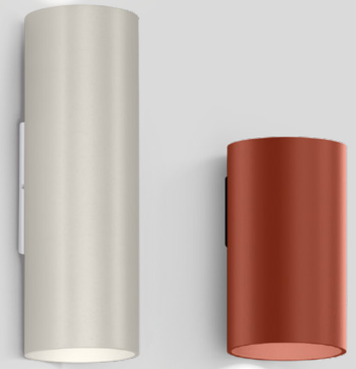








247


375 | 391


507 | 535

## 1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 92,50 | 300220W0 |
| | 93,85 | 300220L0 |
| | 93,85 | 300220G0 |
| | 93,85 | 300220M0 |
| | 93,85 | 300220SG0 |
| | 93,85 | 300220ME0 |
| | 93,85 | 300220Q0 |
| | 93,85 | 300220P0 |
| | 92,50 | 300220B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

## 2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 121,45 | 301220W0 |
| | 125,60 | 301220L0 |
| | 125,60 | 301220G0 |
| | 125,60 | 301220M0 |
| | 125,60 | 301220SG0 |
| | 125,60 | 301220ME0 |
| | 125,60 | 301220Q0 |
| | 125,60 | 301220P0 |
| | 121,45 | 301220B0 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



**DE BRINK VAN PARK BOSWIJK | STUDIO ID+** DOORN | THE NETHERLANDS

# RAY

*Wall* surface














## 1.0 LED

LED PCB 6W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

| | CHF | CODE |
|---|---|---|
| | 265,65 | 342168W_ |
| | 269,80 | 342168G_ |
| | 269,80 | 342168M_ |
| | 269,80 | 342168Q_ |
| | 265,65 | 342168B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 350 | >90 | 3 |
| 3000K | 370 | >90 | 5 |
| 1800-2850K | 330 | >90 | 9 |

## 2.0 LED

LED PCB 11W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

| | CHF | CODE |
|---|---|---|
| | 298,10 | 342148W_ |
| | 302,25 | 342148G_ |
| | 302,25 | 342148M_ |
| | 302,25 | 342148Q_ |
| | 298,10 | 342148B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x440 | >90 | 3 |
| 3000K | 2x460 | >90 | 5 |
| 1800-2850K | 2x410 | >90 | 9 |

## 1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 150,45 | 3221G0W0 |
| | 154,60 | 3221G0G0 |
| | 154,60 | 3221G0M0 |
| | 154,60 | 3221G0Q0 |
| | 150,45 | 3221G0B0 |

## OPTIONAL

flaps for adjustable beam angle

| | CHF | CODE |
|---|---|---|
| | 53,85 | 900401W0 |

QT14 3.5W | G9 | phase-cut dim clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 340lm | 24,85 | 9010G803 |
| 3000K \| 350lm | 24,85 | 9010G805 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-ray-wall


251
341 | 377 | 393
537
759
805

# CENTRAL

*Wall* surface









## 1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 270,50 | 313574W_ |
| | 273,25 | 313574L_ |
| | 273,25 | 313574G_ |
| | 270,50 | 313574B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 580 | >90 | 3 |
| 3000K | 620 | >90 | 5 |

## 2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 328,45 | 313674W_ |
| | 334,00 | 313674L_ |
| | 334,00 | 313674G_ |
| | 328,45 | 313674B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x310 | >90 | 3 |
| 3000K | 2x330 | >90 | 5 |



**OFFICE CEEBE | WEYGERS** HASSELT | BELGIUM

# LEENS

*Wall* surface









## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 525lm

| | CHF | CODE |
|---|---|---|
| | 351,90 | 311174W5 |
| | 379,50 | 311174L5 |
| | 351,90 | 311174B5 |

## 2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 2x320lm

| | CHF | CODE |
|---|---|---|
| | 407,10 | 311274W5 |
| | 448,50 | 311274L5 |
| | 407,10 | 311274B5 |

# BENTO

*Wall* surface








**1.3**

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 285lm

| | CHF | CODE |
|---|---|---|
| | 296,70 | 309274W5 |
| | 296,70 | 309274B5 |




**3.6**

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 285lm

| | CHF | CODE |
|---|---|---|
| | 411,25 | 309374W5 |
| | 411,25 | 309374B5 |




# DRO

*Wall* surface









## 1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

IP44

69-71

| | CHF | CODE |
|---|---|---|
| | 200,10 | 3431G0W0 |

## OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 340lm | 24,85 | 9010G803 |
| 3000K \| 350lm | 24,85 | 9010G805 |

## 2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

IP44

105-107

| | CHF | CODE |
|---|---|---|
| | 310,50 | 3432C0W0 |

## OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 450lm | 14,50 | 9003C103 |

279
373
465
715 | 731



**RESTAURANT TRIANGOLO | CONIX COOL INTERIOR** EDEGEM | BELGIUM

# MIRRO

*Wall* surface

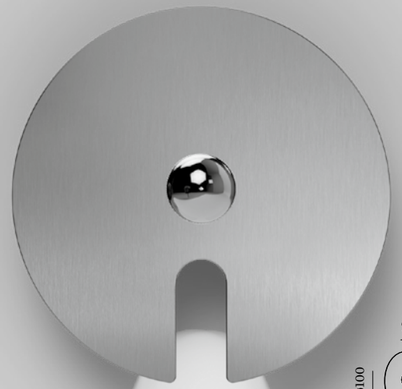










## 1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective composite panel

IP20

| | CHF | CODE |
|---|---|---|
| | 287,05 | 6321E0GB0 |
| | 287,05 | 6321E0NB0 |
| | 287,05 | 6321E0LB0 |
| | 287,05 | 6321E0BL0 |

### OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 405lm | 44,20 | 9003E139 |

A60 5.5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 405lm | 44,20 | 9003E140 |

## 2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective composite panel

IP20

| | CHF | CODE |
|---|---|---|
| | 353,30 | 6322E0GB0 |
| | 353,30 | 6322E0NB0 |
| | 353,30 | 6322E0LB0 |
| | 353,30 | 6322E0BL0 |

### OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

## 3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective composite panel

IP20

| | CHF | CODE |
|---|---|---|
| | 574,10 | 6323E0GB0 |
| | 574,10 | 6323E0NB0 |
| | 574,10 | 6323E0LB0 |
| | 574,10 | 6323E0BL0 |

### OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

283
467
721 | 733





▶ DESIGN WITH LOVE

**HOTEL PARK | MICHAL STAŠKO** PIESTANY | SLOVAKIA

LAMP-CONCEPT.CH



**RESTAURANT EN VRAC** MOUSCRON | BELGIUM

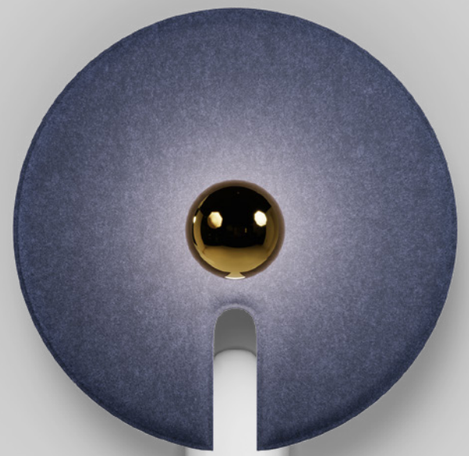

# MIRRO SOFT

*Wall* surface







## 2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 353,30 | 6322E0MF0 |
| | 353,30 | 6322E0LF0 |
| | 353,30 | 6322E0IF0 |
| | 353,30 | 6322E0AF0 |

## 3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium |PET felt material
noise absorbing material

IP20

| | CHF | CODE |
|---|---|---|
| | 574,10 | 6323E0MF0 |
| | 574,10 | 6323E0LF0 |
| | 574,10 | 6323E0IF0 |
| | 574,10 | 6323E0AF0 |

## OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

G95 5.5W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

G95 4.5W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \|375lm | 45,55 | 9003E160 |


## OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 395lm | 48,30 | 9003E157 |

G95 5.5W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 1060lm | 45,55 | 9003E163 |

G95 4.5W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \|375lm | 45,55 | 9003E160 |


285

471



# CLEA

*Wall* surface



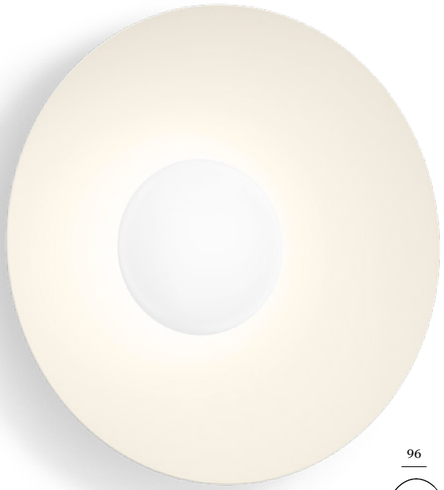










## 1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 396,10 | 181484W_ |
| | 426,45 | 181484LS_ |
| | 426,45 | 181484SG_ |
| | 426,45 | 181484FJ_ |
| | 396,10 | 181484B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 575 | >90 | 3 |
| 3000K | 610 | >90 | 5 |

## 2.0

LED COB 11W| phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 589,30 | 181584W_ |
| | 633,45 | 181584LS_ |
| | 633,45 | 181584SG_ |
| | 633,45 | 181584FJ_ |
| | 589,30 | 181584B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 575 | >90 | 3 |
| 3000K | 610 | >90 | 5 |

## 3.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 754,90 | 181684W_ |
| | 801,80 | 181684LS_ |
| | 801,80 | 181684SG_ |
| | 801,80 | 181684FJ_ |
| | 754,90 | 181684B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 565 | >90 | 3 |
| 3000K | 600 | >90 | 5 |



**MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT**
VINEUIL-SAINT-FIRMIN | FRANCE

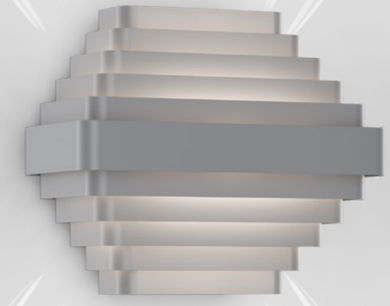

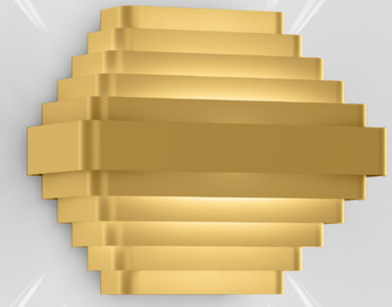

# J.J.W.

*Wall* surface



289



479




## 01

2x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 945,30 | 2054E0S0 |
| | 945,30 | 2054E0G0 |

## OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |



**FORUM OFFICE** SINT-GILLIS-WAAS | BELGIUM

# J.J.W.

*Wall* surface





289



479




## 02

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

| | CHF | CODE |
|---|---|---|
| | 586,50 | 2055E0S0 |
| | 586,50 | 2055E0Q0 |
| | 586,50 | 2055E0G0 |

## OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 245lm | 42,80 | 9003E109 |

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |





**KVÄNUM KITCHEN | KVÄNUM DESIGN STUDIO** COPENHAGEN | DENMARK

reddot award 2019
winner lighting design

# ROOMOR

*Wall* surface






## 1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-45°

| | CHF | CODE |
|---|---|---|
| | 335,35 | 338120BK1 |
| | 328,45 | 338120BB1 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905




## 3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch

IP20 0°-45°|0°-30°

| | CHF | CODE |
|---|---|---|
| | 489,90 | 339120BK1 |
| | 483,00 | 339120BB1 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905




## 3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round

IP20 0°-45°|0°-30°

| | CHF | CODE |
|---|---|---|
| | 481,65 | 339220BK1 |
| | 474,75 | 339220BB1 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

495

725 | 735




BF2


BK3


BB4

reddot award 2019
winner lighting design

# ROOMOR

*Wall* surface

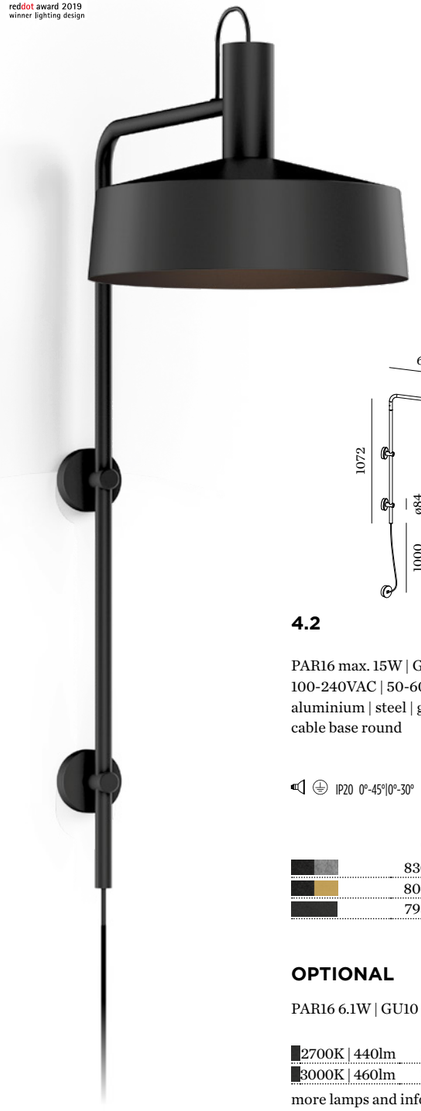




## 4.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round

IP20 0°-45°|0°-30°

| | CHF | CODE |
|---|---|---|
| | 830,80 | 339620BF2 |
| | 804,55 | 339620BK2 |
| | 793,50 | 339620BB2 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905




## 4.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round

IP20 0°-45°|0°-30°

| | CHF | CODE |
|---|---|---|
| | 937,05 | 339620BF3 |
| | 921,85 | 339620BK3 |
| | 903,90 | 339620BB3 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905




## 4.4

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round

IP20 0°-45°|0°-30°

| | CHF | CODE |
|---|---|---|
| | 995,00 | 339620BK4 |
| | 978,45 | 339620BB4 |

### OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

# DARF

*Wall* surface



**PRIVATE RESIDENCE | MAADSTUDIO MAREK SVOBODA** CZECH REPUBLIC






## 2.1

LED TUBE 10W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|75K

3000K | CRI >80 | 1530lm

| | CHF | CODE |
|---|---|---|
| | 354,70 | 2567T7B4 |




## 3.1

LED TUBE 14W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|75K

3000K | CRI >80 | 2300lm

| | CHF | CODE |
|---|---|---|
| | 361,60 | 2566T7B4 |




## 4.1

LED TUBE 23W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|60K

| | CHF | CODE |
|---|---|---|
| | 367,10 | 2569T7B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 3560 | >80 | 4 |
| 4000K | 3950 | >80 | 6 |




## 4.2

LED TUBE 23W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with dimmer switch

IP20 L70|50K

| | CHF | CODE |
|---|---|---|
| | 448,50 | 2569T8B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2780 | >90 | 3 |
| 3000K | 2940 | >90 | 5 |



**PATISSERIE BRAASKMA** LEEUWARDEN | THE NETHERLANDS

LAMP-CONCEPT.CH

**TUNE UP YOUR HEART PROJECT**
weverducre.com/tune-up



**PRIVATE RESIDENCE | SERBOLI BUREAU** SPAIN

# CG SQUARE

*Wall* surface









## 2P SMALL

QT14 2x max. 4W | G9
220-240VAC | 50-60Hz
steel

IP20

| | CHF | CODE |
|---|---|---|
| | 328,45 | 4001G0W0 |
| | 338,10 | 4001G0L0 |
| | 338,10 | 4001G0M0 |
| | 338,10 | 4001G0Q0 |
| | 328,45 | 4001G0B0 |

## OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 340lm | 24,85 | 9010G803 |
| 3000K \| 350lm | 24,85 | 9010G805 |

## 2G BIG

A60 2x max. 12W | E27
220-240VAC | 50-60Hz
steel

IP20

| | CHF | CODE |
|---|---|---|
| | 407,10 | 4002E0W0 |
| | 427,80 | 4002E0L0 |
| | 427,80 | 4002E0M0 |
| | 427,80 | 4002E0Q0 |
| | 407,10 | 4002E0B0 |

## OPTIONAL

A60 5.6W | E27 | phase-cut dim | clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 480lm | 42,80 | 9003E138 |

CHRISTOPHE CRAMER
LAMP-CONCEPT.CH

back



# DOT

*Wall* surface

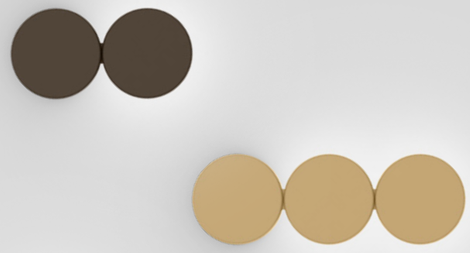












## 2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

IP20 L80|55K

| | CHF | CODE |
|---|---|---|
| | 213,90 | 330164W_ |
| | 213,90 | 330164M_ |
| | 213,90 | 330164Q_ |
| | 213,90 | 330164B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 420 | >90 | 3 |
| 3000K | 435 | >90 | 5 |

## 3.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

IP20 L80|55K

| | CHF | CODE |
|---|---|---|
| | 296,70 | 330264W_ |
| | 296,70 | 330264M_ |
| | 296,70 | 330264Q_ |
| | 296,70 | 330264B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x395 | >90 | 3 |
| 3000K | 2x425 | >90 | 5 |

## 4.0

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium |PC cover

IP20 L80|55K

| | CHF | CODE |
|---|---|---|
| | 393,30 | 330464W_ |
| | 393,30 | 330464M_ |
| | 393,30 | 330464Q_ |
| | 393,30 | 330464B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3x400 | >90 | 3 |
| 3000K | 3x405 | >90 | 5 |



**CREATE YOUR OWN TAPIS**
weverducre.com/tapis-configurator

**PRIVATE RESIDENCE | UNIQUE RENOVATIONS** BELGIUM

# TAPIS

*Wall* surface






## 1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 356,05 | 336174FJ_ |
| | 356,05 | 336174GW_ |
| | 356,05 | 336174ST_ |
| | 328,45 | 336174RA_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 480 | >90 | 5 |



**PRIVATE RESIDENCE | STUDIO 05** BELGIUM



**EOAK FLOORS SHOWROOM | VIGONARCHITECTS** HANOI | VIETNAM

**CREATE YOUR OWN TAPIS**
weverducre.com/tapis-configurator



DAS SEEHÄUSER | WOODSPACE MATTSEE | AUSTRIA

# TAPIS

*Wall* surface

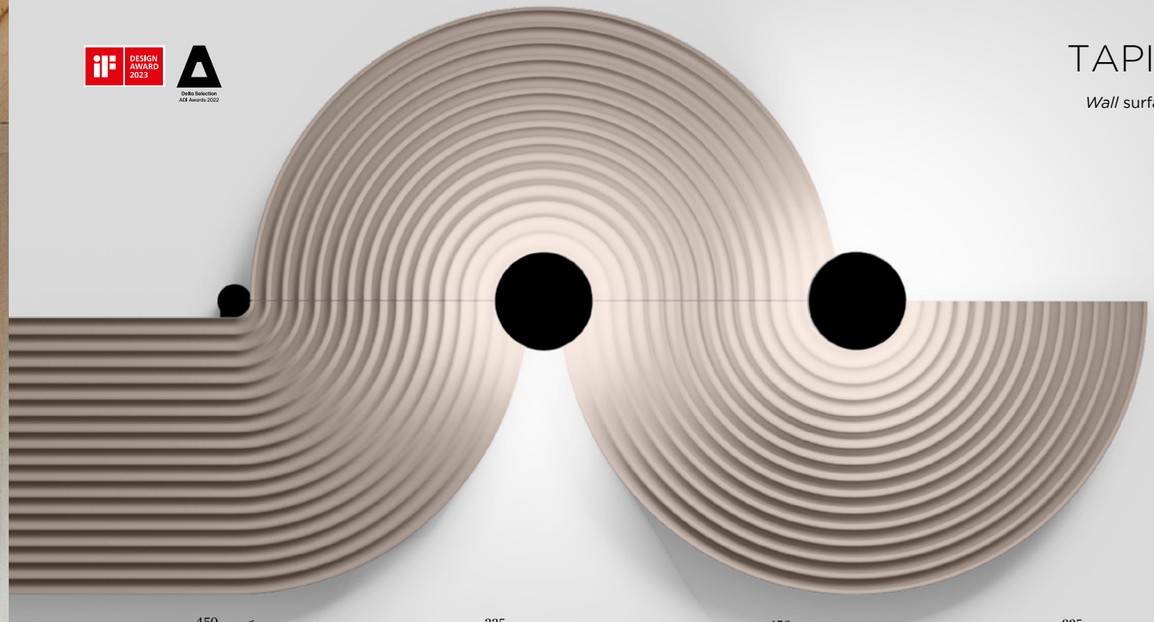




## 2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 367,10 | 336274FJ_ |
| | 367,10 | 336274GW_ |
| | 367,10 | 336274ST_ |
| | 349,15 | 336274RA_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 465 | >90 | 3 |
| 3000K | 500 | >90 | 5 |




## 3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 382,30 | 336374FJ_ |
| | 382,30 | 336374GW_ |
| | 382,30 | 336374ST_ |
| | 360,20 | 336374RA_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 465 | >90 | 3 |
| 3000K | 500 | >90 | 5 |




## 2.1

composite | aluminium

| | CHF | CODE |
|---|---|---|
| | 327,10 | 336200FJ0 |
| | 327,10 | 336200GW0 |
| | 327,10 | 336200ST0 |
| | 309,15 | 336200RA0 |




## 3.1

composite | aluminium

| | CHF | CODE |
|---|---|---|
| | 342,25 | 336300FJ0 |
| | 342,25 | 336300GW0 |
| | 342,25 | 336300ST0 |
| | 320,20 | 336300RA0 |



**HAIDRESSER JANSEN KAPPERS | EMPOWER SPACES** BEEK EN DONK | THE NETHERLANDS

mixology hotter winner

# TAPIS SOFT

*Wall* surface

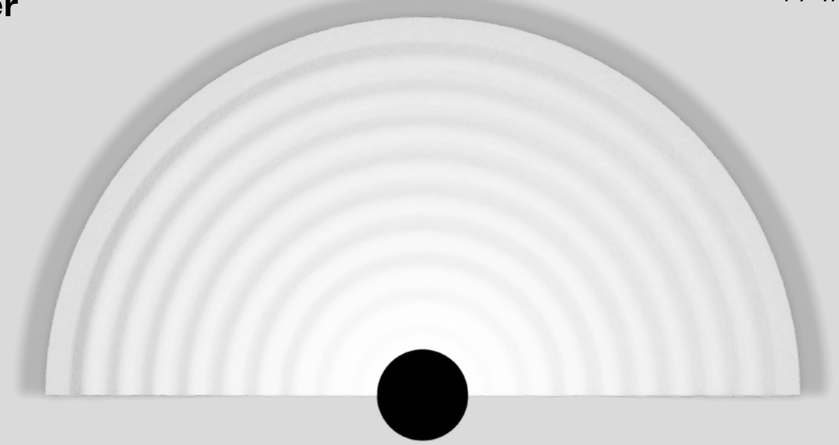










## 1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 549,25 | 336174WF_ |
| | 549,25 | 336174MF_ |
| | 549,25 | 336174LF_ |
| | 549,25 | 336174OF_ |
| | 549,25 | 336174IF_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 410 | >90 | 3 |
| 3000K | 435 | >90 | 5 |

## 2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 393,30 | 336274WF_ |
| | 393,30 | 336274MF_ |
| | 393,30 | 336274LF_ |
| | 393,30 | 336274OF_ |
| | 393,30 | 336274IF_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 440 | >90 | 3 |
| 3000K | 470 | >90 | 5 |

## 2.1

aluminium | PET felt material
noise absorbing material

| | CHF | CODE |
|---|---|---|
| | 353,30 | 336200WF0 |
| | 353,30 | 336200MF0 |
| | 353,30 | 336200LF0 |
| | 353,30 | 336200OF0 |
| | 353,30 | 336200IF0 |





**RESTAURANT L'APERICENA TIME | ARCH. LEONARDO PORCELLI - STILEMI** RIVAROLO CANAVESE | ITALY



mixology winner

# TAPIS SOFT

*Wall* surface






## 3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 412,65 | 336374WF_ |
| | 412,65 | 336374MF_ |
| | 412,65 | 336374LF_ |
| | 412,65 | 336374OF_ |
| | 412,65 | 336374IF_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 440 | >90 | 3 |
| 3000K | 470 | >90 | 5 |




## 4.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 412,65 | 336474WF_ |
| | 412,65 | 336474MF_ |
| | 412,65 | 336474LF_ |
| | 412,65 | 336474OF_ |
| | 412,65 | 336474IF_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 440 | >90 | 3 |
| 3000K | 470 | >90 | 5 |




## 3.1

aluminium | PET felt material
noise absorbing material

| | CHF | CODE |
|---|---|---|
| | 372,60 | 336300WF0 |
| | 372,60 | 336300MF0 |
| | 372,60 | 336300LF0 |
| | 372,60 | 336300OF0 |
| | 372,60 | 336300IF0 |




## 4.1

aluminium | PET felt material
noise absorbing material

| | CHF | CODE |
|---|---|---|
| | 372,60 | 336400WF0 |
| | 372,60 | 336400MF0 |
| | 372,60 | 336400LF0 |
| | 372,60 | 336400OF0 |
| | 372,60 | 336400IF0 |



**PRIVATE RESIDENCE | AJ ARCHITECTEN** BELGIUM

# MILES

*Wall* surface

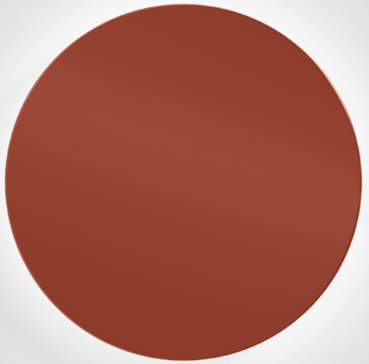









## 2.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

| | | CHF | CODE |
|---|---|---|---|
| | | 356,05 | 317578W_ |
| | | 358,80 | 317578G_ |
| | | 358,80 | 317578M_ |
| | | 358,80 | 317578Q_ |
| | | 358,80 | 317578P_ |
| | | 369,85 | 317578SG_ |
| | | 369,85 | 317578CC_ |
| | | 369,85 | 317578ME_ |
| | | 354,70 | 317578B_ |
| | marble | 445,75 | 317578MW_ |
| | marble | 445,75 | 317578MB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 610 | >90 | 3 |
| 3000K | 620 | >90 | 5 |

## 3.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

| | | CHF | CODE |
|---|---|---|---|
| | | 404,35 | 317778W_ |
| | | 409,90 | 317778G_ |
| | | 409,90 | 317778M_ |
| | | 409,90 | 317778Q_ |
| | | 409,90 | 317778P_ |
| | | 419,55 | 317778SG_ |
| | | 419,55 | 317778CC_ |
| | | 419,55 | 317778ME_ |
| | | 404,35 | 317778B_ |
| | marble | 478,90 | 317778MW_ |
| | marble | 478,90 | 317778MB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 610 | >90 | 3 |
| 3000K | 620 | >90 | 5 |












**ARGANA RESTAURANT | JOSE LARA INTERIORISMO** MADRID | SPAIN



**PRIVATE RESIDENCE | UP FOR GRABS INTERIORS** UNITED KINGDOM

# MILES

*Wall* surface











## 2.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

| | | CHF | CODE |
|---|---|---|---|
| | | 369,85 | 317478W_ |
| | | 372,60 | 317478G_ |
| | | 372,60 | 317478M_ |
| | | 372,60 | 317478Q_ |
| | | 372,60 | 317478P_ |
| | | 369,85 | 317478B_ |
| | marble | 460,95 | 317478MW_ |
| | marble | 460,95 | 317478MB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 610 | >90 | 3 |
| 3000K | 620 | >90 | 5 |

## 3.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

| | | CHF | CODE |
|---|---|---|---|
| | | 419,55 | 317678W_ |
| | | 425,05 | 317678G_ |
| | | 425,05 | 317678M_ |
| | | 425,05 | 317678Q_ |
| | | 425,05 | 317678P_ |
| | | 419,55 | 317678B_ |
| | marble | 495,45 | 317678MW_ |
| | marble | 495,45 | 317678MB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 610 | >90 | 3 |
| 3000K | 620 | >90 | 5 |





# MILES

*Wall* surface








## 9.0

LED PCB 31W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 494,05 | 317878W_ |
| | 500,95 | 317878G_ |
| | 494,05 | 317878B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1540 | >90 | 3 |
| 3000K | 1560 | >90 | 5 |




## 12.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 590,65 | 317978W_ |
| | 601,70 | 317978G_ |
| | 590,65 | 317978B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2110 | >90 | 3 |
| 3000K | 2130 | >90 | 5 |





# LARRA

*Wall* surface









## 1.0

LED TUBE 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal glass

IP20 L70|15K

| | CHF | CODE |
|---|---|---|
| | 162,85 | 1966T8W_ |
| | 162,85 | 1966T8L_ |
| | 162,85 | 1966T8M_ |
| | 162,85 | 1966T8P_ |
| | 162,85 | 1966T8Q_ |
| | 162,85 | 1966T8GM_ |
| | 162,85 | 1966T8B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 700 | >90 | 3 |
| 3000K | 720 | >90 | 5 |

## 2.0

LED TUBE 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal glass

IP20 L70|15K

| | CHF | CODE |
|---|---|---|
| | 191,85 | 1967T8W_ |
| | 191,85 | 1967T8L_ |
| | 191,85 | 1967T8M_ |
| | 191,85 | 1967T8P_ |
| | 191,85 | 1967T8Q_ |
| | 191,85 | 1967T8GM_ |
| | 191,85 | 1967T8B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 800 | >90 | 3 |
| 3000K | 820 | >90 | 5 |



**OFFICE COPTHALL BRIDGE HOUSE | EKHO STUDIO** HARROGATE | UNITED KINGDOM

DESIGN AWARD 2024

reddot winner 2023

# FINLIN

*Wall* surface



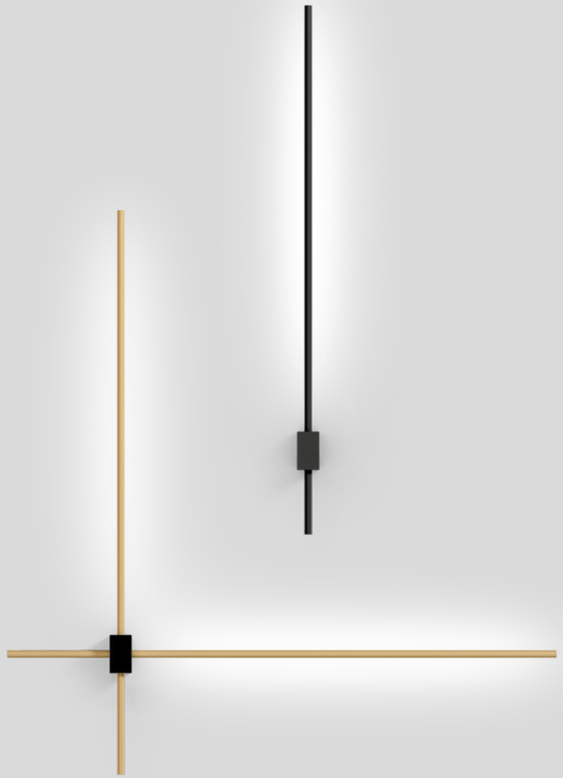







## 1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 324,30 | 370584CH_ |
| | 324,30 | 370584B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 450 | >90 | 3 |
| 3000K | 485 | >90 | 5 |

## 4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 448,50 | 370884CH_ |
| | 448,50 | 370884B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 895 | >90 | 3 |
| 3000K | 965 | >90 | 5 |

## OPTIONAL

spacer 10mm for overlapping

| | CHF | CODE |
|---|---|---|
| | 42,80 | 900195B0 |

specs on page 911



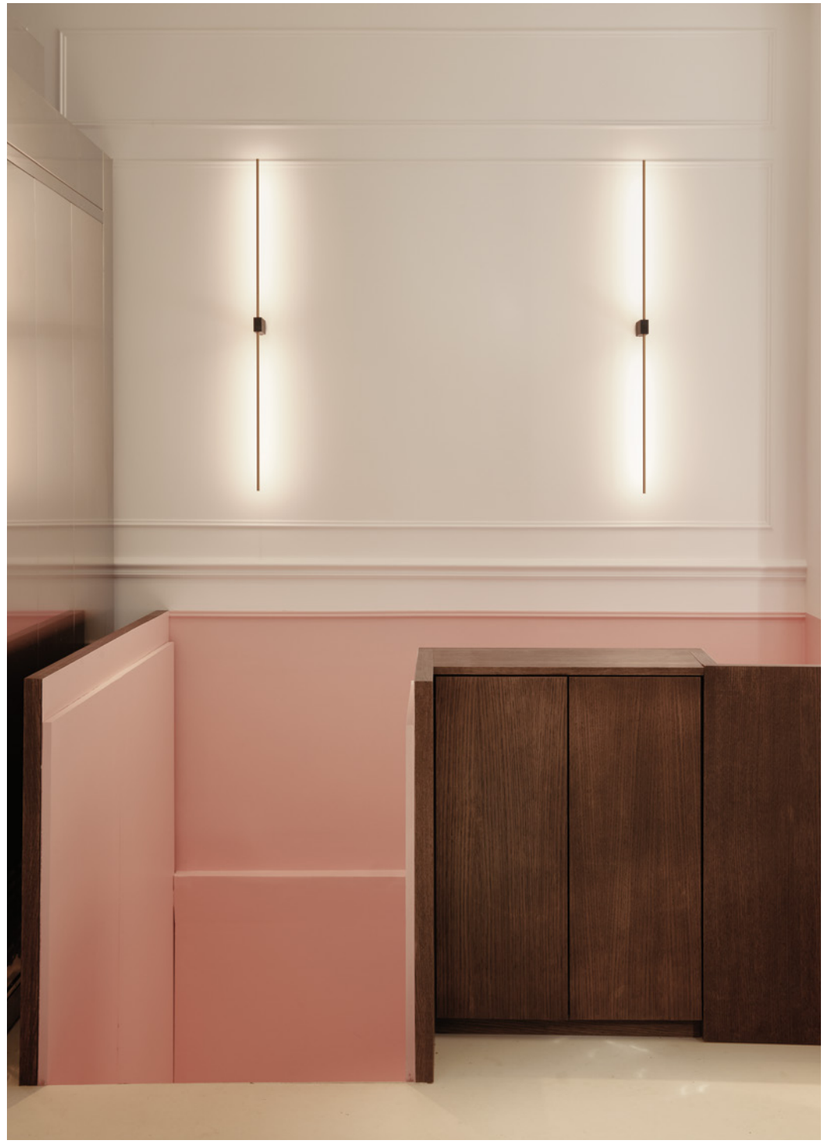

**PASTRY SHOP DONATIEN MAÎTRE ECLAIR | STUDIO CARRÉ – PAUL LEVAILLANT** PARIS | FRANCE

DESIGN AWARD 2024

reddot winner 2023

# FINLIN

*Wall* surface

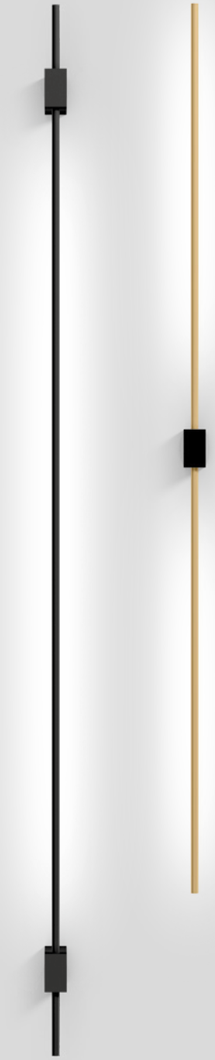







## 2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 407,10 | 370684CH_ |
| | 407,10 | 370684B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 895 | >90 | 3 |
| 3000K | 965 | >90 | 5 |

## 3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 462,30 | 370784CH_ |
| | 462,30 | 370784B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 895 | >90 | 3 |
| 3000K | 965 | >90 | 5 |

## OPTIONAL

spacer 10mm for overlapping

| | CHF | CODE |
|---|---|---|
| | 42,80 | 900195B0 |

specs on page 911



DESIGN AWARD 2024

reddot winner 2023

# FINLIN

*Wall* surface



263

433

727




## 1.0 ROUND

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 462,30 | 371184CH_ |
| | 462,30 | 371184B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1180 | >90 | 3 |
| 3000K | 1280 | >90 | 5 |



## OPTIONAL

spacer 10mm for overlapping

| | CHF | CODE |
|---|---|---|
| | 42,80 | 900196B0 |

specs on page 911




reddot winner 2024

# FIL SPIN

*Wall* surface

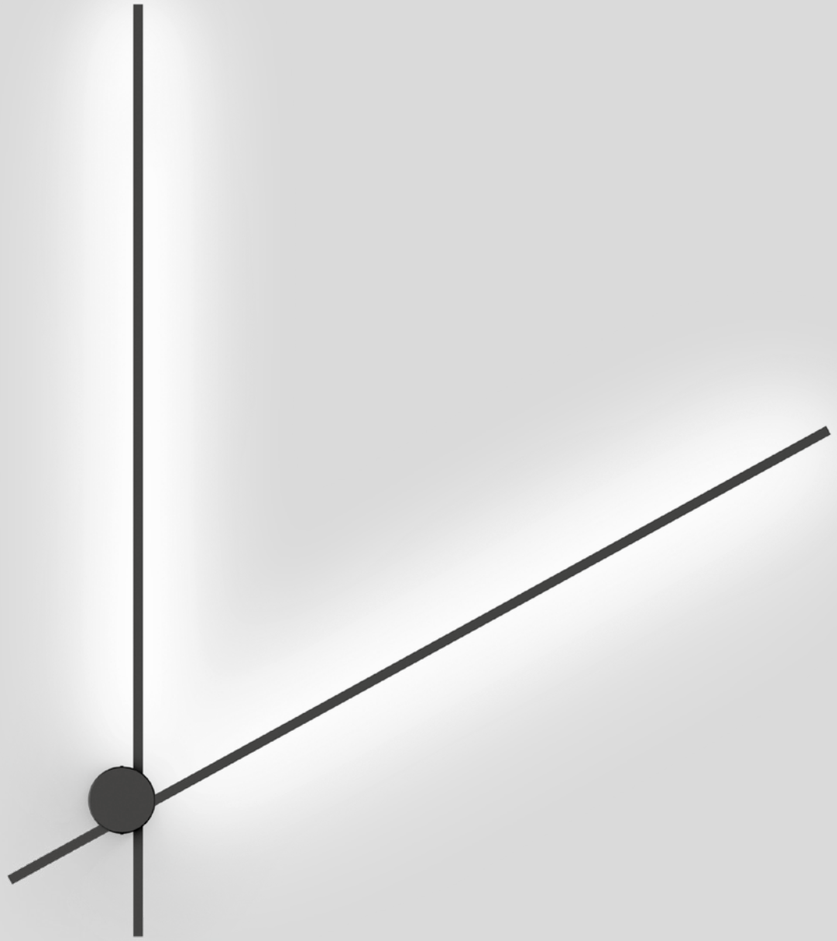







**1.0**

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

IP20 180° L80|100K

2700K | CRI >90 | 2x905lm

| | CHF | CODE |
|---|---|---|
| | 586,50 | 254584B3 |




**PRIVATE RESIDENCE | STUDIO PALINPERÄ OY** FINLAND

# VENN

*Wall* surface



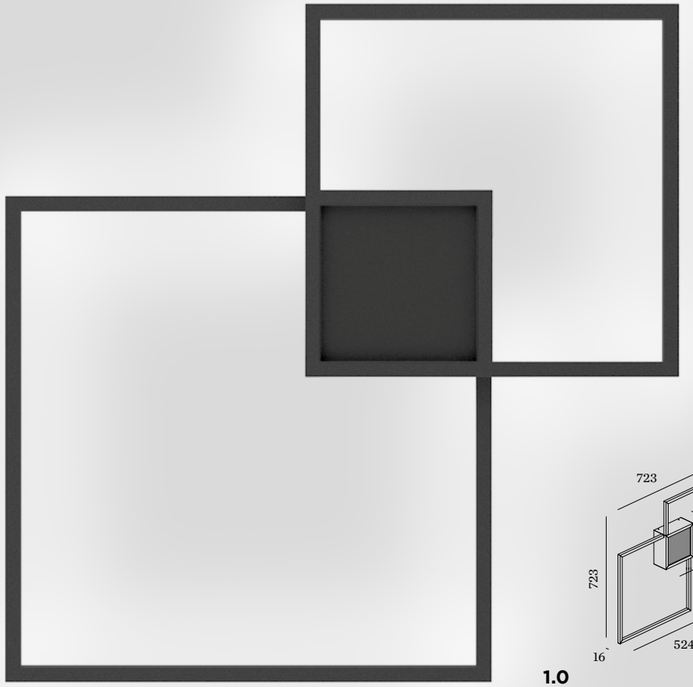




## 1.0

LED PCB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover
indirect light

IP20 L70|55K

| | CHF | CODE |
|---|---|---|
| | 938,40 | 149184W_ |
| | 938,40 | 149184Q_ |
| | 938,40 | 149184B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3410 | >90 | 3 |
| 3000K | 3510 | >90 | 5 |




## 2.0

LED PCB 49W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover dir./
indirect light

IP20 L70|55K

| | CHF | CODE |
|---|---|---|
| | 1062,60 | 149284W_ |
| | 1062,60 | 149284Q_ |
| | 1062,60 | 149284B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 480/3920 | >90 | 3 |
| 3000K | 495/4035 | >90 | 5 |

**CREATE YOUR OWN VENN**
weverducre.com/venn-configurator

LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE** AUSTRIA

reddot winner 2023

# MATCH snooze

*Wall* surface 61 | 137 | 153

193

329 | 347

415 | 509

571

723 | 729






## 1.0

LED COB 5W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off

IP20 0°-90°|350° M-30° L80|50K

| | CHF | CODE |
|---|---|---|
| | 273,25 | 177353W_ |
| | 273,25 | 177353Q_ |
| | 273,25 | 177353B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 330 | >90 | 3 |
| 3000K | 345 | >90 | 5 |



**PRIVATE RESIDENCE | NORDIC STANDARD** SPAIN

DESIGN AWARD 2021

reddot winner 2020
lighting design

# MICK snooze

*Wall* surface

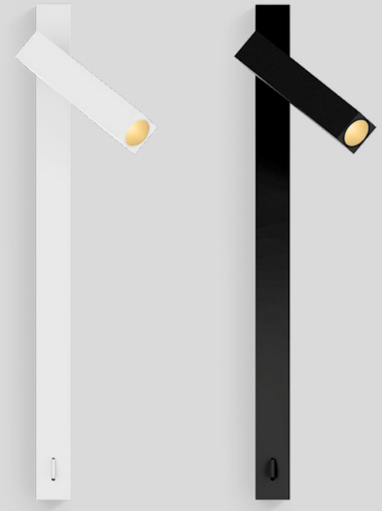




## 1.0

LED COB 8W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off

IP20 0°-90°|350° M-Z3° L80|50K





| | CHF | CODE |
|---|---|---|
| | 407,10 | 159643J_ |
| | 407,10 | 159643K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 185 | >90 | 3 |
| 3000K | 200 | >90 | 5 |

199
333
back

SAVE CONNECTION
LAMP-CONCEPT.CH



**PRIVATE RESIDENCE | IN-BETWEEN ARCHITECTS LIMITED** HONG KONG

# SARA snooze

*Wall* surface











203



365




## 1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. switch on/off

IP20 0°-90°|330°

| | CHF | CODE |
|---|---|---|
| | 213,90 | 157320W0 |
| | 219,45 | 157320G0 |
| | 219,45 | 157320K0 |
| | 213,90 | 157320B0 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905



DESIGN AWARD 2021
reddot winner 2020
lighting design

# MICK

*Wall* surface

199
333

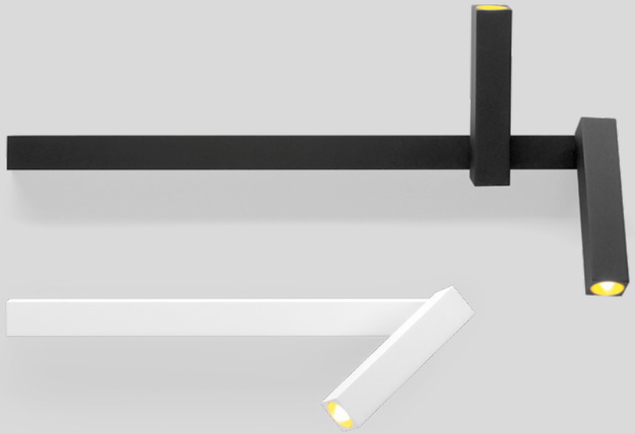







## 1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

| | CHF | CODE |
|---|---|---|
| | 369,85 | 159344J_ |
| | 369,85 | 159344K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 235 | >90 | 3 |
| 3000K | 245 | >90 | 5 |

## 2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

| | CHF | CODE |
|---|---|---|
| | 476,10 | 159244J_ |
| | 476,10 | 159244K_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x215 | >90 | 3 |
| 3000K | 2x225 | >90 | 5 |



LAMP-CONCEPT.CH

back



**PRIVATE RESIDENCE | ABOUT - ARCHITECTURE & PHOTOGRAPHY** ITALY

# DOMINO

*Wall* surface






## 1.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

| | CHF | CODE |
|---|---|---|
| | 371,25 | 3371A4W_ |
| | 371,25 | 3371A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1180 | >80 | 2 |
| 3000K | 1190 | >80 | 4 |

# SCAVA

*Wall* surface









## 1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PC cover

IP20 L80|50K

| | CHF | CODE |
|---|---|---|
| | 311,90 | 350188W_ |
| | 316,05 | 350188GB_ |
| | 311,90 | 350188B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1830 | >90 | 3 |
| 3000K | 1910 | >90 | 5 |



**PRIVATE RESIDENCE** BELGIUM

# HAJO IP44

*Wall* surface

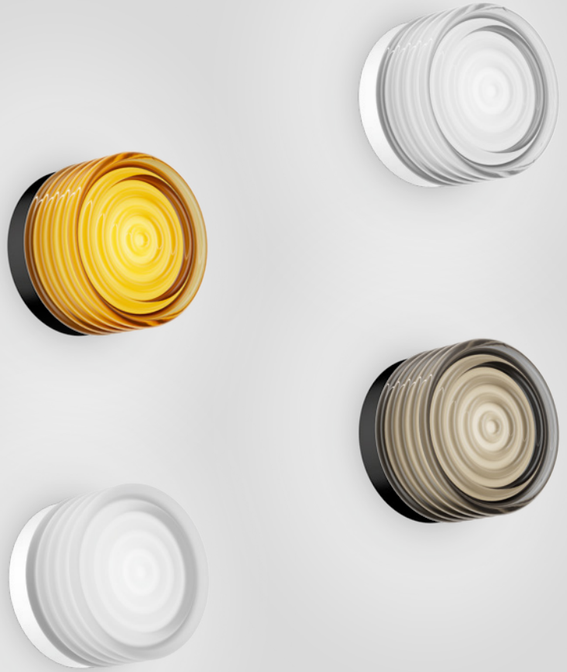




## 1.0

LED COB 9W | dimmable
220-240VAC | 50-60Hz | incl. driver
glass | aluminium

IP20 L80|50K

phase-cut dim

| | CHF | CODE |
|---|---|---|
| | 369,85 | 346184WC_ |
| | 369,85 | 346184WW_ |
| | 369,85 | 346184WA_ |
| | 369,85 | 346184WB_ |
| | 369,85 | 346184BC_ |
| | 369,85 | 346184BW_ |
| | 369,85 | 346184BA_ |
| | 369,85 | 346184BB_ |

DALI-2

| | CHF | CODE |
|---|---|---|
| | 411,25 | 346185WC_ |
| | 411,25 | 346185WW_ |
| | 411,25 | 346185WA_ |
| | 411,25 | 346185WB_ |
| | 411,25 | 346185BC_ |
| | 411,25 | 346185BW_ |
| | 411,25 | 346185BA_ |
| | 411,25 | 346185BB_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 420 | >90 | 3 |
| 3000K | 440 | >90 | 5 |

SHOP COMPLIMENTS
LAMP-CONCEPT.CH

back







# PERLEZ IP44

*Wall* surface

169

271 | 275 | 295












## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 L80|50K

50-52

| | CHF | CODE |
|---|---|---|
| | 259.45 | 192484W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 520 | >95 | 3 |
| 3000K | 550 | >95 | 5 |
| 4000K | 580 | >95 | 7 |

## 2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 L80|50K

50-52

| | CHF | CODE |
|---|---|---|
| | 273.25 | 192584W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 600 | >95 | 3 |
| 3000K | 630 | >95 | 5 |
| 4000K | 665 | >95 | 7 |

## 3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 L80|50K

50-52

| | CHF | CODE |
|---|---|---|
| | 300.85 | 192684W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 645 | >95 | 3 |
| 3000K | 665 | >95 | 5 |
| 4000K | 705 | >95 | 7 |



**PRIVATE RESIDENCE** GREECE

# PERLEZ CLIP IP44

*Wall* surface

169

271 | 275 | 295










## 1.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

IP44 L80|50K

| | CHF | CODE |
|---|---|---|
| | 269,10 | 392484W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 550 | >95 | 5 |
| 4000K | 580 | >95 | 7 |

## 2.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

IP44 L80|50K

| | CHF | CODE |
|---|---|---|
| | 282,90 | 392584W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 630 | >95 | 5 |
| 4000K | 665 | >95 | 7 |

## 3.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

IP44 L80|50K

| | CHF | CODE |
|---|---|---|
| | 296,70 | 392684W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 3000K | 665 | >95 | 5 |
| 4000K | 705 | >95 | 7 |





PRIVATE RESIDENCE | RAUMTAKT GMBH SWITZERLAND

# MIRBA IP44

*Wall* surface












## 1.0

LED PCB 4/6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|50K

| | CHF | CODE |
|---|---|---|
| | 273,25 | 328188W_ |
| | 273,25 | 328188BW_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | L 375/H 645 | >90 | 3 |
| 3000K | L 395/H 670 | >90 | 5 |

## 2.0

LED PCB 6/9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|50K

| | CHF | CODE |
|---|---|---|
| | 328,45 | 328288W_ |
| | 328,45 | 328288BW_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | L 535/H 920 | >90 | 3 |
| 3000K | L 575/H 960 | >90 | 5 |

## 3.0

LED PCB 8/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|50K

| | CHF | CODE |
|---|---|---|
| | 379,50 | 328388W_ |
| | 379,50 | 328388BW_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | L 730/H 1290 | >90 | 3 |
| 3000K | L 770/H 1350 | >90 | 5 |





# MIRBI long IP44

*Wall* surface














## 1.0

LED PCB 5/7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 338,10 | 329188W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 255/420 | >90 | 3 |
| 3000K | 265/435 | >90 | 5 |

## 2.0

LED PCB 8/13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 503,70 | 329288W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 445/815 | >90 | 3 |
| 3000K | 460/840 | >90 | 5 |

## 3.0

LED PCB 13/19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|60K

| | CHF | CODE |
|---|---|---|
| | 931,50 | 329388W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 735/1220 | >90 | 3 |
| 3000K | 755/1250 | >90 | 5 |





# RIBELLE IP65

*Wall* surface






## 1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

3000K | CRI >90 | 425lm

| | CHF | CODE |
|---|---|---|
| | 448,50 | 772184W5 |
| | 448,50 | 772184M5 |
| | 448,50 | 772184B5 |


825

867




# PAVIO IP65

*Wall* surface

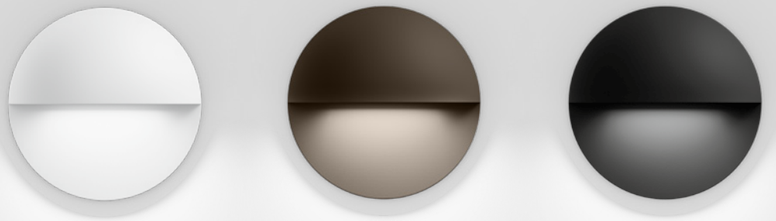




**1.0**

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 525lm

| | CHF | CODE |
|---|---|---|
| | 255,30 | 351184W5 |
| | 255,30 | 351184Q5 |
| | 255,30 | 351184B5 |

831

# Table | Floor

712 – 735

## TABLE



**DRO**
715



**DRO**
717



**CG01**
719



**MIRRO**
721



**MATCH**
723



**ROOMOR**
725

## FLOOR



**DRO**
715



**FINLIN**
727



**MATCH**
729



**DRO**
731



**MIRRO**
733



**ROOMOR**
735



APT GRAND KOLIBA | SALPIETRA & GAJDOS ARCHITECTS SLOVAKIA

# DRO

*Table / Floor*

279
373
465
623




## 1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with switch

IP20

| | CHF | CODE |
|---|---|---|
| | 255,30 | 6421G0WB0 |

### OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

| | CHF | CODE |
|---|---|---|
| 2700K \| 340lm | 24,85 | 9010G803 |
| 3000K \| 350lm | 24,85 | 9010G805 |




## 2.0

C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

| | CHF | CODE |
|---|---|---|
| | 365,70 | 6422C0WB0 |

### OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 450lm | 14,50 | 9003C103 |




## 3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

| | CHF | CODE |
|---|---|---|
| | 476,10 | 6423E0WB0 |

### OPTIONAL

A60 9W | E27 | phase-cut dim
opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |



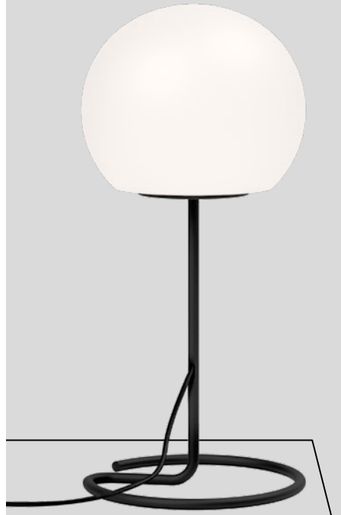

# DRO

*Table*

279

373

465

623




## 2.0

C35 max. 6W| E14 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

| | CHF | CODE |
|---|---|---|
| | 489,90 | 6432C0WB0 |

### OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 450lm | 14,50 | 9003C103 |




## 3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

| | CHF | CODE |
|---|---|---|
| | 627,90 | 6433E0WB0 |

### OPTIONAL

A60 9W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |



**PRIVATE RESIDENCE** BELGIUM



CHRISTOPHE CRAKE

LAMP-CONCEPT.CH

back

# CG01

*Table*




## CG01

T25 max. 6W | E14
220-240VAC | 50-60Hz
steel
cable plug with dimmer switch

IP20

| | CHF | CODE |
|---|---|---|
| | 1352,40 | 4011C0YE0 |
| | 1352,40 | 4011C0RE0 |
| | 1352,40 | 4011C0AU0 |
| | 1352,40 | 4011C0BE0 |
| | 1352,40 | 4011C0B0 |

## OPTIONAL

T25-85 5W | E14 | phase-cut dim
gold tinted

| | CHF | CODE |
|---|---|---|
| 2200K \| 460lm | 40,05 | 9003C108 |
| 2500K \| 480lm | 40,05 | 9003C107 |
| 2700K \| 500lm | 40,05 | 9003C106 |




# MIRRO

*Table*

283

467

625




## 1.0

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective composite panel
cable plug with dimmer switch

IP20

| | CHF | CODE |
|---|---|---|
| | 407,10 | 6301E0GB0 |
| | 407,10 | 6301E0NB0 |
| | 407,10 | 6301E0LB0 |
| | 407,10 | 6301E0BL0 |

## OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 405lm | 44,20 | 9003E139 |

A60 5.5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 405lm | 44,20 | 9003E140 |

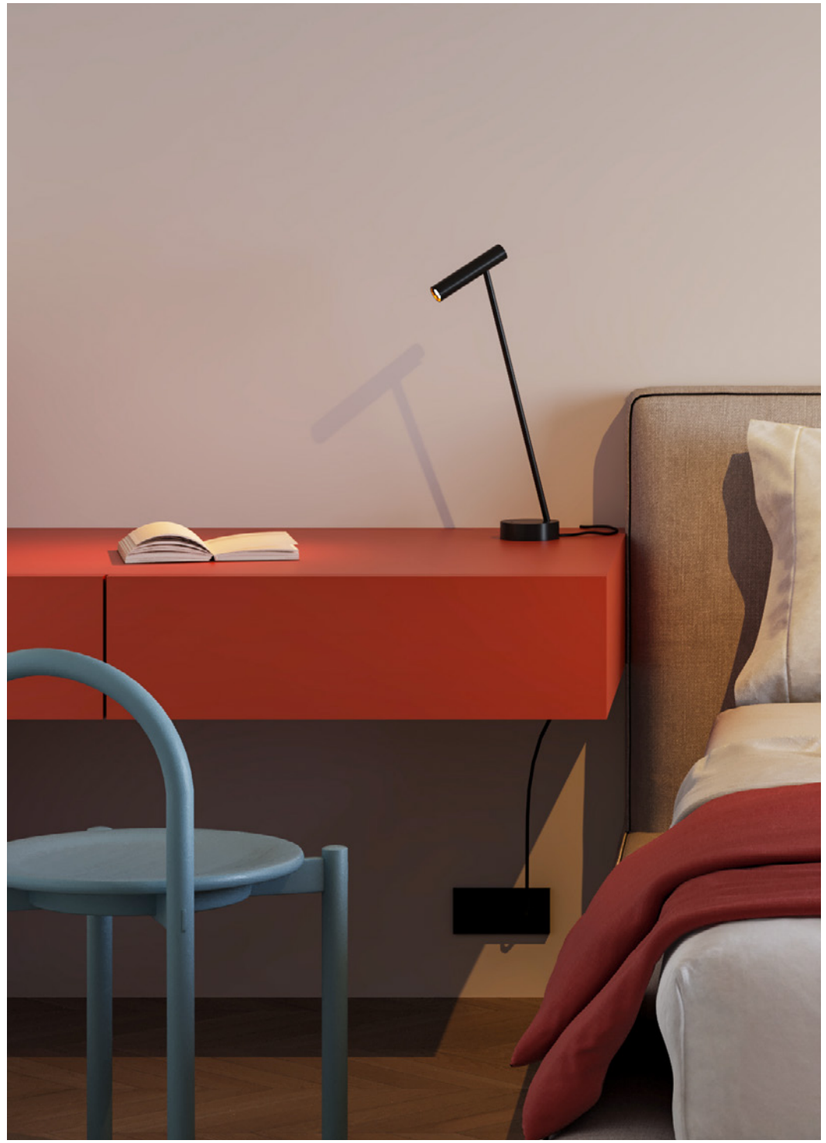



# MATCH

*Table* 61 | 137 | 153

193

329 | 347

415 | 509

571

589 | 685




**1.0**

LED COB 8W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
incl. USB-C port

IP20 45°|0°-145° M-30° L80|50K

2700K | CRI >90 | 505lm

| | CHF | CODE |
|---|---|---|
| | 379,50 | 477254W3 |
| | 379,50 | 477254B3 |



**HOTEL LOPESAN | EMILIO PELLEJERO** FARO | SPAIN

reddot award 2019
winner lighting design



LAMP-CONCEPT.CH




back

# ROOMOR

*Table*




## 1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch
CH and UK variants online

IP20 0°-45°|0°-30°

| | CHF | CODE |
|---|---|---|
| | 361,60 | 637120GG1 |
| | 361,60 | 637120RR1 |
| | 361,60 | 637120BK1 |
| | 354,70 | 637120BB1 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 445lm | 22,80 | 901228W3 |
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 465lm | 22,80 | 901228W5 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

# FINLIN

*Floor*











263

433

673 | 679

**1.0**

LED PCB 16W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser
cable plug with dimmer switch

IP20 0°-10°|360° L80|50K

2700K | CRI >90 | 1360lm

| | CHF | CODE |
|---|---|---|
| | 545,10 | 470184W3 |
| | 545,10 | 470184B3 |

# MATCH

*Floor* 61 | 137 | 153

193

329 | 347

415 | 509

571

589 | 685



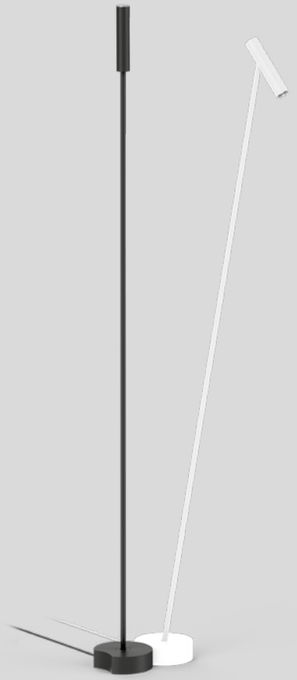










**1.0**

LED COB 8W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium
integrated dimmer button

IP20 0°-10°|360°|0°-145° M-30° L80|50K

2700K | CRI >90 | 505lm

| | CHF | CODE |
|---|---|---|
| | 448,50 | 477354W3 |
| | 448,50 | 477354B3 |



**PRIVATE RESIDENCE | ERIBO STIJLBOUWERS** BELGIUM

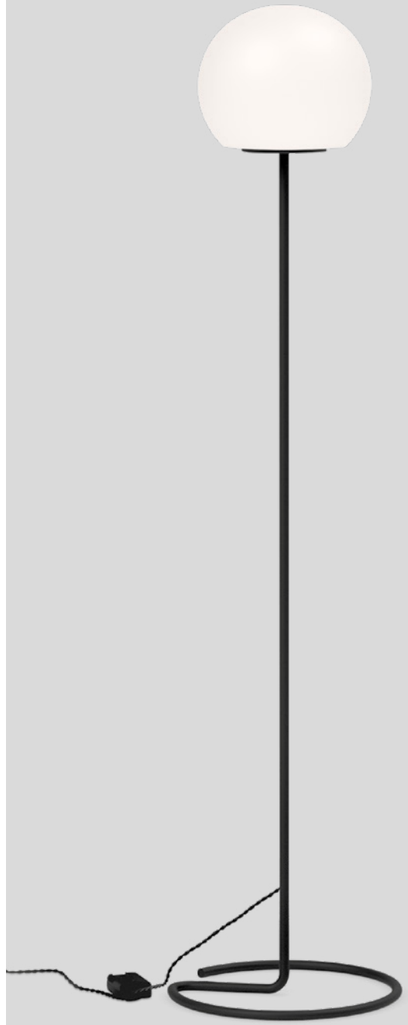

# DRO

*Floor*

279

373

465

623




## 3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

| | CHF | CODE |
|---|---|---|
| | 821,10 | 6442E0WB0 |

## OPTIONAL

A60 9W | E27 | phase-cut dim | opal

| | CHF | CODE |
|---|---|---|
| 2700K \| 800lm | 20,05 | 9003E152 |





# MIRRO

*Floor*






## 2.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective composite panel
cable plug with dimmer switch

IP20

| | CHF | CODE |
|---|---|---|
| | 589,30 | 6311E0GB0 |
| | 589,30 | 6311E0NB0 |
| | 589,30 | 6311E0LB0 |
| | 589,30 | 6311E0BL0 |

### OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 955lm | 48,30 | 9003E157 |




## 3.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective composite panel
cable plug with dimmer switch

IP20

| | CHF | CODE |
|---|---|---|
| | 810,10 | 6312E0GB0 |
| | 810,10 | 6312E0NB0 |
| | 810,10 | 6312E0LB0 |
| | 810,10 | 6312E0BL0 |

### OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

| | CHF | CODE |
|---|---|---|
| 2200K \| 370lm | 48,30 | 9003E156 |
| 2700K \| 410lm | 48,30 | 9003E142 |

G95 5W | E27 | phase-cut dim
silver mirror

| | CHF | CODE |
|---|---|---|
| 2700K \| 955lm | 48,30 | 9003E157 |



**BV PARSHIP | JOPPICH & RIECKHOFF | SEEL BOBSIN PARTNER** HAMBURG | GERMANY

reddot award 2019
winner lighting design

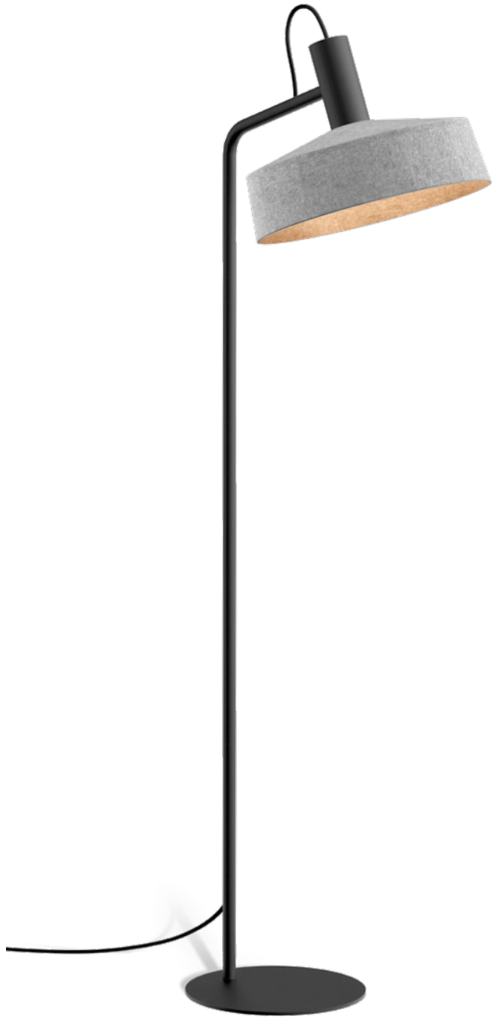

# ROOMOR

*Floor*




## 1.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch
CH and UK variants online

IP20 0°-45°|0°-30°

| | CHF | CODE |
|---|---|---|
| | 692,80 | 638120BF2 |
| | 666,55 | 638120BK2 |
| | 655,50 | 638120BB2 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905




## 1.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch
CH and UK variants online

IP20 0°-45°|0°-30°

| | CHF | CODE |
|---|---|---|
| | 799,05 | 638120BF3 |
| | 783,85 | 638120BK3 |
| | 765,90 | 638120BB3 |

## OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

| | CHF | CODE |
|---|---|---|
| 2700K \| 440lm | 22,80 | 901228B3 |
| 3000K \| 460lm | 22,80 | 901228B5 |

more lamps and info on page 905

495
639

outdoor

# *Ceiling* recessed

738 – 749

RECESSED



**DEEP BIJOU**
741



**DEEP PETIT**
743



**DEEP**
745



**TAIO**
747



**INTRA**
749



**PRIVATE RESIDENCE | MINDAUGAS LELIŪGA** LITHUANIA

LAMP-CONCEPT.CH

# DEEP bijou

*Outdoor*
*Ceiling* recessed

99 | 157






## 1.0

LED COB 4W | 500mA | 8V
aluminium

IP65 M-30° L80|55K

wire springs 50-52 85 4-25

| | CHF | CODE |
|---|---|---|
| | 95,95 | 165361W_ |
| | 95,95 | 165361Q_ |
| | 95,95 | 165361B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 470 | >90 | 3 |
| 3000K | 495 | >90 | 5 |

IC rated

## ALWAYS USE

driver | IP67

| | CHF | CODE |
|---|---|---|
| 7W \| 500mA | 64,20 | 90214301 |

more options and specs on page 899

**MORE VERSIONS ONLINE**
weverducre.com/more-deep-bijou-ip65

back



**PRIVATE RESIDENCE** GREECE

# DEEP petit

*Outdoor*
*Ceiling* recessed

101 | 159






## 1.0

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs 68-70 85 4-25

| | CHF | CODE |
|---|---|---|
| | 132,50 | 153761W_ |
| | 132,50 | 153761Q_ |
| | 132,50 | 153761B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 590 | >90 | 3 |
| 3000K | 610 | >90 | 5 |




## ALWAYS USE

driver | 350mA | IP68

| | CHF | CODE |
|---|---|---|
| 17W | 95,25 | 90213602 |

more options and specs on page 897



# DEEP

*Outdoor*
*Ceiling* recessed

105 | 161






## 1.0

LED COB 6/9W | 350/500mA | 17V
aluminium

IP65 M-33° L80|55K

wire springs 86-89 85 4-27

| | CHF | CODE |
|---|---|---|
| | 150,45 | 184161W_ |
| | 150,45 | 184161Q_ |
| | 150,45 | 184161B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 485/640 | >90 | 3 |
| 3000K | 510/690 | >90 | 5 |

## ALWAYS USE

driver | IP68

| | CHF | CODE |
|---|---|---|
| 17W \| 350mA | 95,25 | 90213602 |
| 24W \| 500mA | 102,15 | 90214702 |

more options and specs on page 897

**MORE VERSIONS ONLINE**
weverducre.com/more-deep-ip65

IC rated











# TAIO

*Outdoor*
*Ceiling* recessed




## 1.0

LED COB 6/9W | 350/500mA | 18V
aluminium
opal glass convex lens

IP65 W-105° L80|55K g

wire springs Ø68-73 80 4-27

| | CHF | CODE |
|---|---|---|
| | 131,10 | 180781W_ |
| | 131,10 | 180781G_ |
| | 131,10 | 180781Q_ |
| | 131,10 | 180781B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 340/455 | >90 | 3 |
| 3000K | 370/495 | >90 | 5 |




## ALWAYS USE

driver | IP68

| | CHF | CODE |
|---|---|---|
| 17W \| 350mA | 95,25 | 90213602 |
| 24W \| 500mA | 102,15 | 90214702 |

more options and specs on page 897

165
299
757
803



PRIVATE RESIDENCE | KILLIAN GARTNER AUSTRIA

# INTRA

*Outdoor*
*Ceiling* recessed









## 1.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP65 L70|60K

blade springs 76-79 70 min. 8

3000K | CRI >90 | 410lm

| | CHF | CODE |
|---|---|---|
| | 186,30 | 733188W5 |
| | 186,30 | 733188A5 |
| | 186,30 | 733188B5 |

## 2.0 SPOT

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
clear lens

IP65 W-45° L70|50K

blade springs 76-79 70 min. 8

3000K | CRI >90 | 560lm

| | CHF | CODE |
|---|---|---|
| | 186,30 | 733268W5 |
| | 186,30 | 733268A5 |
| | 186,30 | 733268B5 |

# *Ceiling* surface / suspended

750 – 777

## SURFACE



**TRAM**
753



**TUBE**
755



**TAIO**
757



**RAY**
759



**TRAIN**
761



**TUBE CARRÉ**
763



**BOX**
765



**BLAS 1.0**
767



**BLAS 2.0**
767



**ROB**
769



**ROSS**
771



**TRADORA**
775

## SUSPENDED



**TRADORA**
777



**PRIVATE RESIDENCE | ATELIER B** AUSTRIA

# TRAM

*Outdoor*
*Ceiling* surface






**1.0**

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 555lm

| | CHF | CODE |
|---|---|---|
| | 196,00 | 747768W5 |
| | 196,00 | 747768A5 |
| | 196,00 | 747768Q5 |
| | 196,00 | 747768B5 |

797

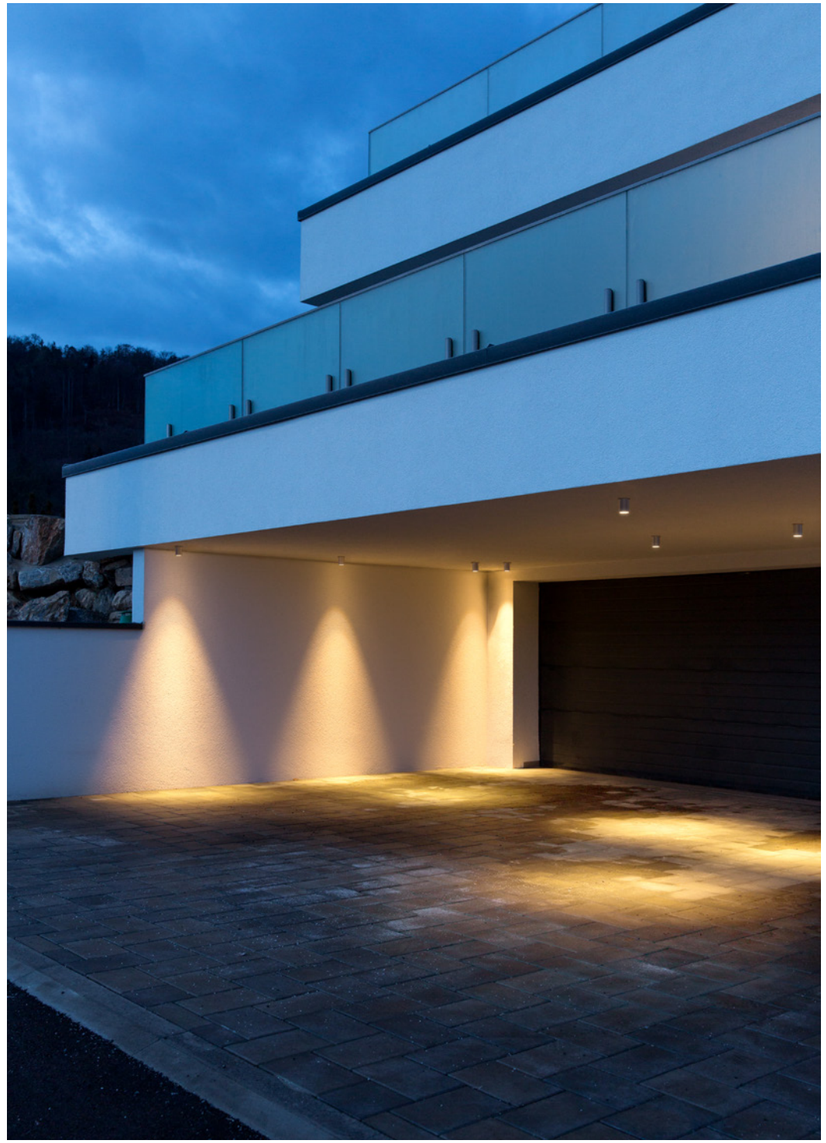

**PRIVATE RESIDENCE** AUSTRIA

# TUBE

*Outdoor*
*Ceiling* surface









## 1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 620lm

| | CHF | CODE |
|---|---|---|
| | 287,05 | 734364W5 |
| | 287,05 | 734364D5 |
| | 287,05 | 734364A5 |
| | 287,05 | 734364B5 |

## 1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65

| | CHF | CODE |
|---|---|---|
| | 162,85 | 734120W0 |
| | 162,85 | 734120D0 |
| | 162,85 | 734120A0 |
| | 162,85 | 734120Q0 |
| | 162,85 | 734120B0 |

## OPTIONAL

PAR16 3.7W | GU10

| | CHF | CODE |
|---|---|---|
| 2700K \| 350lm | 17,95 | 905227S2 |
| 3000K \| 350lm | 17,95 | 905227S4 |



**PRIVATE RESIDENCE** BELGIUM

# TAIO

*Outdoor*
*Ceiling* surface






## 1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

IP65 W-105° L80|55K

| | CHF | CODE |
|---|---|---|
| | 273,25 | 180884W_ |
| | 273,25 | 180884A_ |
| | 273,25 | 180884Q_ |
| | 273,25 | 180884B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 455 | >90 | 3 |
| 3000K | 510 | >90 | 5 |

165
299
747
803



**SHOP PHILMODE | ERIC FRANSSENS** BEAUFAYS | BELGIUM

# RAY

*Outdoor*
*Ceiling* surface









## OPTIONAL

inner cover

| | CHF | CODE |
|---|---|---|
| | 31,75 | 911041W1 |
| | 31,75 | 911041D1 |
| | 31,75 | 911041A1 |
| | 31,75 | 911041B1 |

## 1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-21° L70|50K

| | CHF | CODE |
|---|---|---|
| | 241,50 | 735458W_ |
| | 241,50 | 735458D_ |
| | 241,50 | 735458A_ |
| | 241,50 | 735458B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 670 | >90 | 3 |
| 3000K | 700 | >90 | 5 |
| 2000-3000K | 470 | >90 | 9 |

251
341 | 377 | 393
537
615
805



# TRAIN

*Outdoor*
*Ceiling* surface

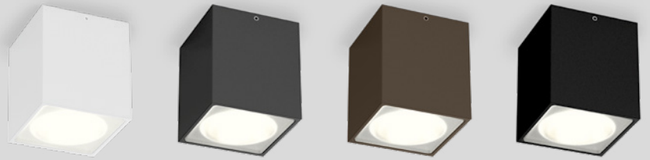




## 1.0

LED COB 6W| phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 530lm

| | CHF | CODE |
|---|---|---|
| | 196,00 | 718668W5 |
| | 196,00 | 718668A5 |
| | 196,00 | 718668Q5 |
| | 196,00 | 718668B5 |

807



**PRIVATE RESIDENCE | SPADO ARCHITECTS** AUSTRIA

# TUBE CARRÉ

*Outdoor*
*Ceiling* surface

















## 1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-32° L80|60K

3000K | CRI >90 | 720lm

| | CHF | CODE |
|---|---|---|
| | 314,65 | 734464W5 |
| | 314,65 | 734464D5 |
| | 314,65 | 734464A5 |
| | 314,65 | 734464B5 |

## 1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65

| | CHF | CODE |
|---|---|---|
| | 215,30 | 734220W0 |
| | 215,30 | 734220D0 |
| | 215,30 | 734220A0 |
| | 215,30 | 734220Q0 |
| | 215,30 | 734220B0 |

## OPTIONAL

PAR16 3.7W | GU10

| | CHF | CODE |
|---|---|---|
| 2700K \| 350lm | 17,95 | 905227S2 |
| 3000K \| 350lm | 17,95 | 905227S4 |

811



**PRIVATE RESIDENCE** FRANCE

# BOX

*Outdoor*
*Ceiling* surface

235
335
607
815



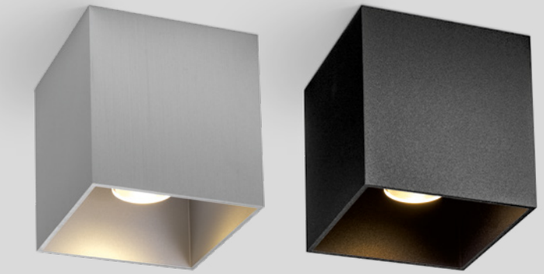












## 1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-21° L70|50K

## OPTIONAL

inner reflector

| | CHF | CODE |
|---|---|---|
| | 29,00 | 911211W1 |
| | 29,00 | 911211D1 |
| | 29,00 | 911211Q1 |
| | 29,00 | 911211B1 |

inner cover

| | CHF | CODE |
|---|---|---|
| | 31,75 | 911011W1 |
| | 31,75 | 911011D1 |
| | 31,75 | 911011Q1 |
| | 31,75 | 911011B1 |

| | CHF | CODE |
|---|---|---|
| | 241,50 | 735258W_ |
| | 241,50 | 735258D_ |
| | 241,50 | 735258A_ |
| | 241,50 | 735258Q_ |
| | 241,50 | 735258B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 600 | >90 | 3 |
| 3000K | 620 | >90 | 5 |
| 2000-3000K | 415 | >90 | 9 |



**PRIVATE RESIDENCE | PETER RANEBURGER** AUSTRIA

# BLAS

*Outdoor*
*Ceiling* surface

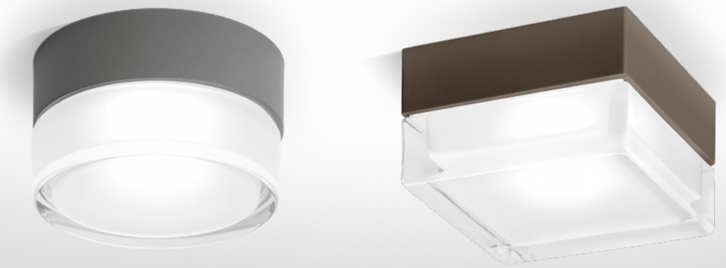







## 1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

| | CHF | CODE |
|---|---|---|
| | 314,65 | 736387W5 |
| | 314,65 | 736387A5 |
| | 314,65 | 736387Q5 |
| | 314,65 | 736387B5 |

## 2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

| | CHF | CODE |
|---|---|---|
| | 336,75 | 736487W5 |
| | 336,75 | 736487A5 |
| | 336,75 | 736487Q5 |
| | 336,75 | 736487B5 |




827



**PRIVATE RESIDENCE** BELGIUM

# ROB

*Outdoor*
*Ceiling* surface

301






ø160




ø256




ø345

## 1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 0.70kg

| | CHF | CODE |
|---|---|---|
| | 231,85 | 701188W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1170 | >90 | 3 |
| 3000K | 1220 | >90 | 5 |

## 2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 1.20kg

| | CHF | CODE |
|---|---|---|
| | 338,10 | 701288W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 1800 | >90 | 3 |
| 3000K | 1810 | >90 | 5 |

## 3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 1.90kg

| | CHF | CODE |
|---|---|---|
| | 462,30 | 701388W_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 3340 | >90 | 3 |
| 3000K | 3360 | >90 | 5 |



# ROSS

*Outdoor*
*Ceiling* surface

307





ø260



ø320



ø450

3-step output selector

3000K – 6000K colour switch

## 1.0

LED PCB 9/11/15W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
960lm/1170lm/1630lm

| | CHF | CODE |
|---|---|---|
| | 109,05 | 715184W9 |

## 2.0

LED PCB 10/15/20W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
1270lm/1810lm/2360lm

| | CHF | CODE |
|---|---|---|
| | 178,05 | 715284W9 |

## 3.0

LED PCB 28/33/37W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
4350lm/5000lm/5570lm

| | CHF | CODE |
|---|---|---|
| | 310,50 | 715384W9 |



**TRADORA**
**CEILING SUSPENDED**
page 777

**TRADORA**
**CEILING SURFACE**
page 775

**TRADORA**
**WALL SURFACE**
page 823

**CLASCO**
**WALL SURFACE**
page 791

# classic

# collection

OH, HOW ROMANTIC

Wer Belgien besucht hat, kennt die romantischen Landhäuser mit hölzernen Fensterläden, in die man am liebsten sofort einziehen würde. Ihr verspielter historischer Stil macht sie so warm und einladend – mit Elementen von handgefertigten Möbeln bis zu den traditionellen Leuchten der neuen CLASSIC COLLECTION.

Qui a visité la Belgique connaît ces maisons de campagne romantiques aux volets en bois, dans lesquelles on voudrait aussitôt s'installer. Leur style historique et ludique leur confère une atmosphère chaleureuse – des meubles faits main aux luminaires traditionnels de la nouvelle CLASSIC COLLECTION.

weverducre.com/classic-collection

# TRADORA

*Outdoor*
*Ceiling* surface






## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

IP65 L80|50K

2700K | CRI >90 | 350lm

| | CHF | CODE |
|---|---|---|
| | 503,70 | 760284CL3 |
| | 503,70 | 760284CQ3 |
| | 489,90 | 760284B3 |

777
823





# TRADORA

*Outdoor*
*Ceiling* suspended




**1.0**

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

IP65 L80|50K

2700K | CRI >90 | 350lm

| | CHF | CODE |
|---|---|---|
| | 517,50 | 760384CL3 |
| | 517,50 | 760384CQ3 |
| | 503,70 | 760384B3 |


775

823

back

# *Wall* recessed

778 – 787

**GUIDE LIGHTS**



**RETO 0.8**
781



**RETO 1.3**
781



**RETO 2.0**
783



**ORIS 0.7**
785



**ORIS 2.0**
785



**ORIS 0.8**
787



**ORIS 1.3**
787

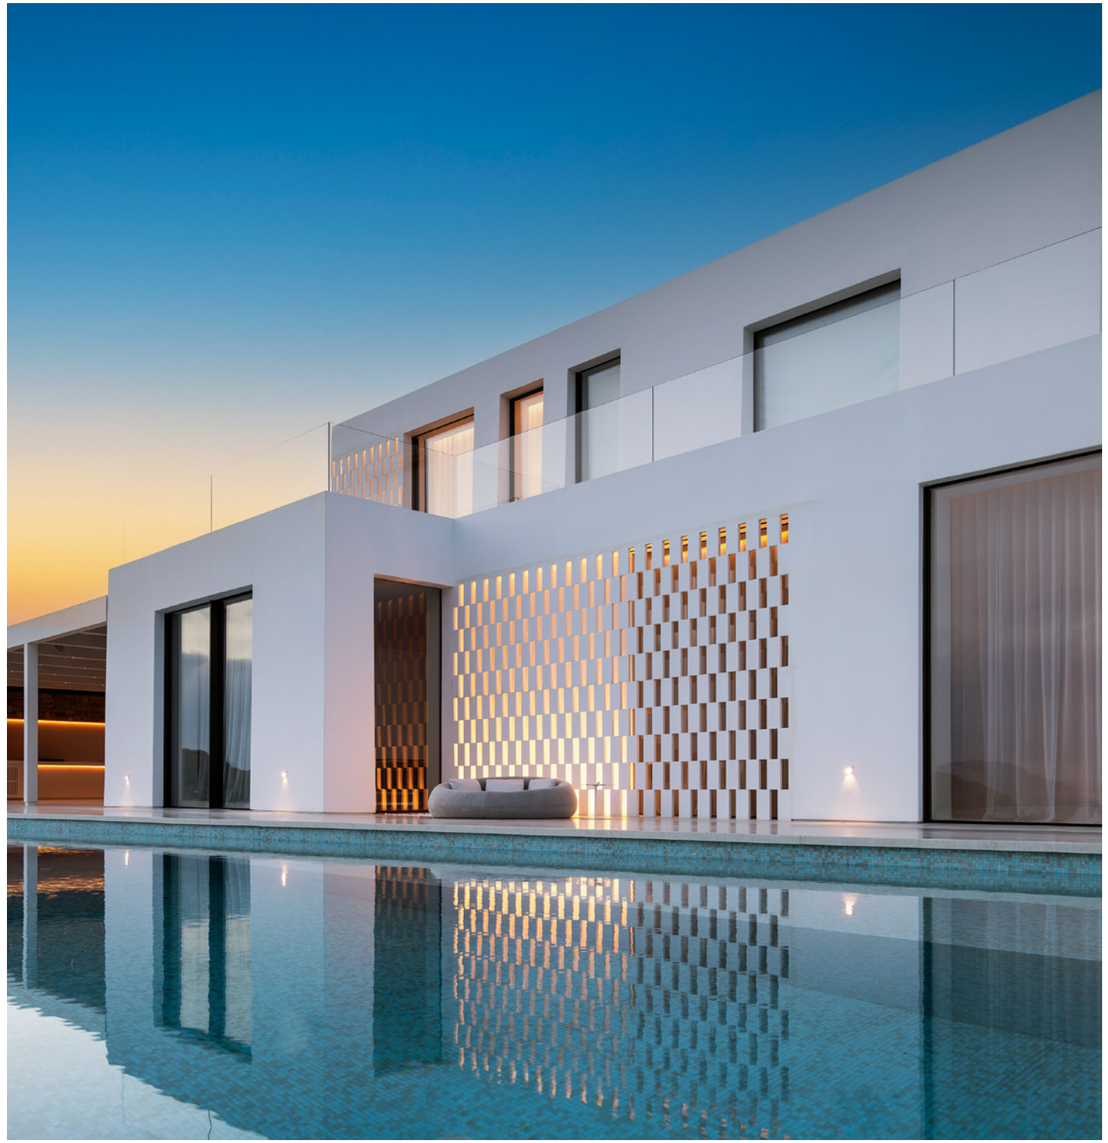

**PRIVATE RESIDENCE** GREECE

# RETO

*Outdoor*
*Wall* recessed







## 0.8

LED PCB 3W | const. volt. | 24V
aluminium

IP65 L80|50K

66x66 40 min. 12

3000K | CRI >90 | 75lm

| | CHF | CODE |
|---|---|---|
| | 143,55 | 7451A2A5 |
| | 143,55 | 7451A2Q5 |
| | 143,55 | 7451A2B5 |

## 1.3

LED PCB 5W | const. volt. | 24V
aluminium

IP65 L80|50K

115x117 40 min. 12

3000K | CRI >90 | 170lm

| | CHF | CODE |
|---|---|---|
| | 198,75 | 7452A2A5 |
| | 198,75 | 7452A2Q5 |
| | 198,75 | 7452A2B5 |

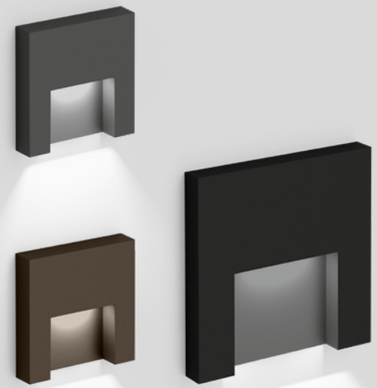

## ALWAYS USE

driver | IP67

| | CHF | CODE |
|---|---|---|
| 24V \| 35W | 67,65 | 90212802 |
| 24V \| 100W | 199,55 | 90212903 |

specs on page 901

## ALWAYS USE

driver | IP67

| | CHF | CODE |
|---|---|---|
| 24V \| 35W | 67,65 | 90212802 |
| 24V \| 100W | 199,55 | 90212903 |

specs on page 901

## OPTIONAL

recessed housing incl. plasterkit*

| | CHF | CODE |
|---|---|---|
| | 63,50 | 90012047 |

concrete housing*

| | CHF | CODE |
|---|---|---|
| | 44,20 | 90012046 |

*driver to be placed externally

## OPTIONAL

recessed housing incl. plasterkit*

| | CHF | CODE |
|---|---|---|
| | 71,80 | 90012041 |

concrete housing*

| | CHF | CODE |
|---|---|---|
| | 53,85 | 90012040 |

*driver to be placed externally

573
835

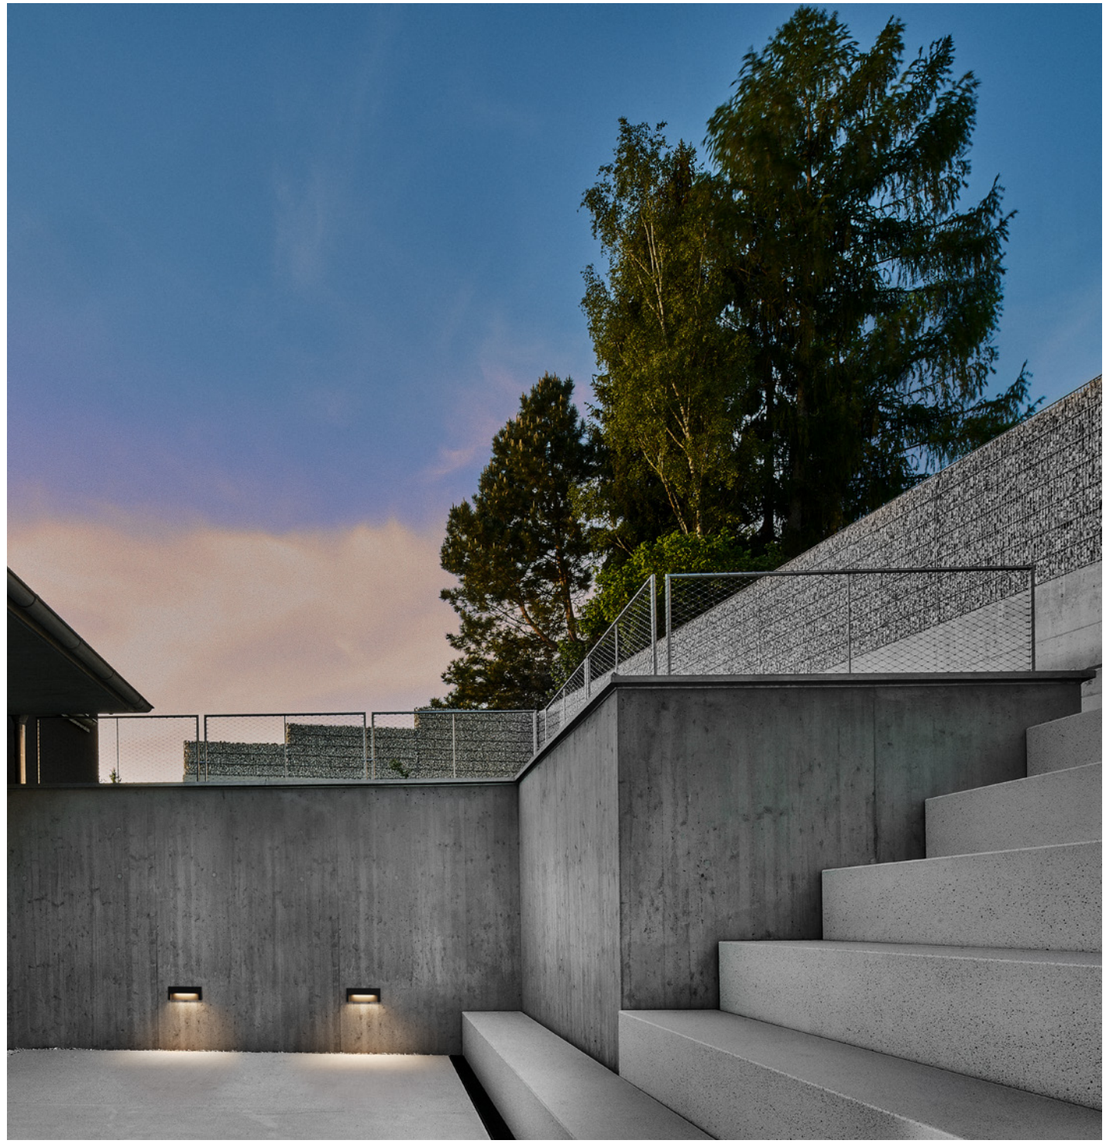

**PRIVATE RESIDENCE** AUSTRIA

# RETO

*Outdoor*
*Wall* recessed

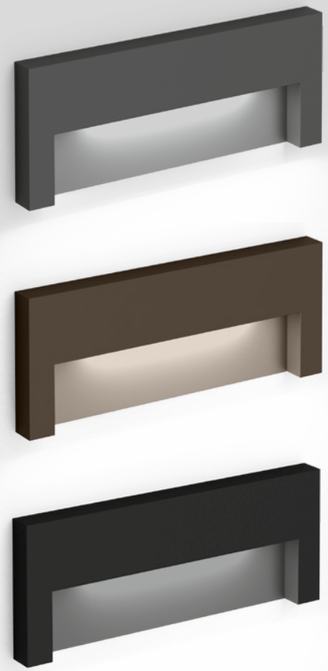




## 2.0

LED PCB 7W | const. volt. | 24V
aluminium

IP65 L80|50K

47x182 L40 min. 12

3000K | CRI >90 | 330lm

| | CHF | CODE |
|---|---|---|
| | 241,50 | 7453A2A5 |
| | 241,50 | 7453A2Q5 |
| | 241,50 | 7453A2B5 |

## ALWAYS USE

driver | IP67

| | CHF | CODE |
|---|---|---|
| 24V \| 35W | 67,65 | 90212802 |
| 24V \| 100W | 199,55 | 90212903 |

specs on page 901

## OPTIONAL

recessed housing incl. plasterkit*

| | CHF | CODE |
|---|---|---|
| | 62,10 | 90012039 |

concrete housing*

| | CHF | CODE |
|---|---|---|
| | 52,45 | 90012044 |

*driver to be placed externally

573
835



**PRIVATE RESIDENCE | SPADO ARCHITECTS** AUSTRIA

# ORIS

*Outdoor*
*Wall* recessed

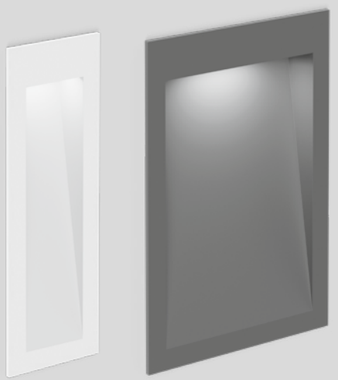




## 0.7

LED PCB 2/5W| 350/700mA | 6V
aluminium

IP65 L70|60K

47x182 40 min. 12

3000K | CRI >90 | 70/120lm

| | CHF | CODE |
|---|---|---|
| | 149,05 | 7091A1W5 |
| | 149,05 | 7091A1D5 |
| | 149,05 | 7091A1B5 |

### ALWAYS USE

driver | IP66

| | CHF | CODE |
|---|---|---|
| 3W \| 350mA | 48,30 | 90213101 |
| 7W \| 500mA | 64,20 | 90214301 |
| 7W \| 700mA | 50,40 | 90215301 |

more options and specs on page 897

### OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 62,10 | 90012039 |

concrete housing

| | CHF | CODE |
|---|---|---|
| | 52,45 | 90012044 |




## 2.0

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP65 L70|60K

115x185 40 min. 12

3000K | CRI >90 | 140/225lm

| | CHF | CODE |
|---|---|---|
| | 182,20 | 7097A1W5 |
| | 182,20 | 7097A1D5 |
| | 182,20 | 7097A1B5 |

### ALWAYS USE

driver | IP66

| | CHF | CODE |
|---|---|---|
| 3W \| 350mA | 48,30 | 90213101 |
| 7W \| 500mA | 64,20 | 90214301 |
| 7W \| 700mA | 50,40 | 90215301 |

more options and specs on page 897

### OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 80,05 | 90012043 |

concrete housing

| | CHF | CODE |
|---|---|---|
| | 58,00 | 90012042 |

581



PRIVATE RESIDENCE ARTIO STUDIO/MARTA DE LOZOYA SPAIN

# ORIS

*Outdoor*
*Wall* recessed







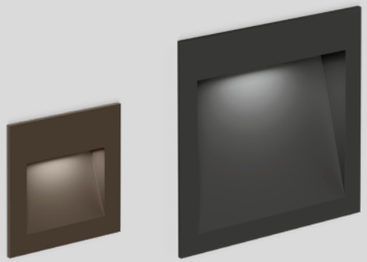

## 0.8

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP65 L70|60K

66x66 40 min. 12

3000K | CRI >90 | 90/150lm

| | CHF | CODE |
|---|---|---|
| | 135,25 | 7094A1W5 |
| | 135,25 | 7094A1A5 |
| | 135,25 | 7094A1Q5 |
| | 135,25 | 7094A1B5 |

## ALWAYS USE

driver | IP66

| | CHF | CODE |
|---|---|---|
| 3W \| 350mA | 48,30 | 90213101 |
| 7W \| 500mA | 64,20 | 90214301 |
| 7W \| 700mA | 50,40 | 90215301 |

more options and specs on page 897

## OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 63,50 | 90012047 |

concrete housing

| | CHF | CODE |
|---|---|---|
| | 44,20 | 90012046 |

## 1.3

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP65 L70|60K

115x117 40 min. 12

3000K | CRI >90 | 145/220lm

| | CHF | CODE |
|---|---|---|
| | 168,40 | 7096A1W5 |
| | 168,40 | 7096A1D5 |
| | 168,40 | 7096A1A5 |
| | 168,40 | 7096A1Q5 |
| | 168,40 | 7096A1B5 |

## ALWAYS USE

driver | IP66

| | CHF | CODE |
|---|---|---|
| 3W \| 350mA | 48,30 | 90213101 |
| 7W \| 500mA | 64,20 | 90214301 |
| 7W \| 700mA | 50,40 | 90215301 |

more options and specs on page 897

## OPTIONAL

recessed housing incl. plasterkit

| | CHF | CODE |
|---|---|---|
| | 71,80 | 90012041 |

concrete housing

| | CHF | CODE |
|---|---|---|
| | 53,85 | 90012040 |

main 581

# *Wall* surface

788 – 835

## LUMINAIRES



CLASCO
791



KIOSK
793



TRAM
797



TUBE 1.0
799



TUBE 2.0
801



TAIO
803



RAY 1.0 | 2.0
805



RAY 4.0
805



TRAIN
807



CENTRAL
809



TUBE CARRÉ 1.0
811



TUBE CARRÉ 2.0
813



BOX 1.0 | 2.0
815



BOX 4.0
815



TAPE
817



PALOS 1.0
819



PALOS 2.0
819



PALOS 3.0
819



SWAM
821



TRADORA
823



RIBELLE
825



BLAS 1.0
827



BLAS 2.0
827

## SPOT LIGHTS



X-BEAM
829



X-BEAM ROUND
829

## GUIDE LIGHTS



PAVIO
831



RETO ROUND
833



RETO
835



# CLASCO

*Outdoor*
*Wall* surface






## 1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 W-105° L80|50K

| | CHF | CODE |
|---|---|---|
| | 255,30 | 759174CL_ |
| | 245,65 | 759174A_ |
| | 255,30 | 759174AB_ |
| | 255,30 | 759174CQ_ |
| | 245,65 | 759174Q_ |
| | 245,65 | 759174B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 505 | >90 | 3 |
| 3000K | 520 | >90 | 5 |

# KIOSK

*Outdoor*
*Wall* surface











## 1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

| | CHF | CODE |
|---|---|---|
| | 311,90 | 707174W_ |
| | 311,90 | 707174A_ |
| | 311,90 | 707174Q_ |
| | 311,90 | 707174B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x480 | >90 | 3 |
| 3000K | 2x500 | >90 | 5 |

## 2.0

LED PCB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

| | CHF | CODE |
|---|---|---|
| | 434,70 | 707574W_ |
| | 434,70 | 707574A_ |
| | 434,70 | 707574Q_ |
| | 434,70 | 707574B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x960 | >90 | 3 |
| 3000K | 2x1000 | >90 | 5 |

857







**PRIVATE RESIDENCE** AUSTRIA

# TRAM

*Outdoor*
*Wall* surface

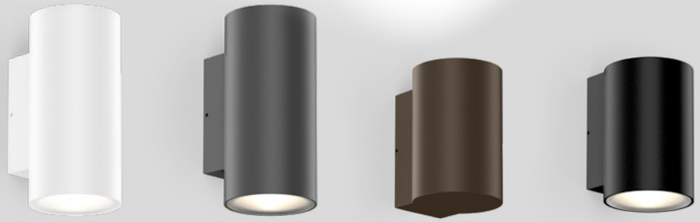










## 1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 555lm

| | CHF | CODE |
|---|---|---|
| | 231,85 | 747568W5 |
| | 231,85 | 747568A5 |
| | 231,85 | 747568Q5 |
| | 231,85 | 747568B5 |

## 2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 2x360lm

| | CHF | CODE |
|---|---|---|
| | 300,85 | 747668W5 |
| | 300,85 | 747668A5 |
| | 300,85 | 747668Q5 |
| | 300,85 | 747668B5 |



HOTEL VALAMAR GIRANDELLA & TUI RESORT | STUDIO 92 RABAC | CROATIA

# TUBE

*Outdoor*
*Wall* surface

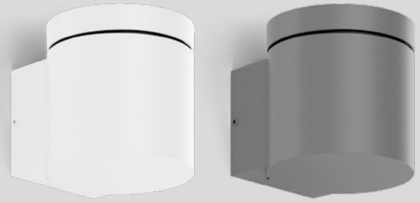









## 1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 635lm

| | CHF | CODE |
|---|---|---|
| | 259,45 | 711364W5 |
| | 259,45 | 711364D5 |
| | 259,45 | 711364A5 |
| | 259,45 | 711364B5 |

## 1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

| | CHF | CODE |
|---|---|---|
| | 129,75 | 711120W0 |
| | 129,75 | 711120D0 |
| | 129,75 | 711120A0 |
| | 129,75 | 711120Q0 |
| | 129,75 | 711120B0 |

## OPTIONAL

PAR16 3.7W | GU10

| | CHF | CODE |
|---|---|---|
| 2700K \| 350lm | 17,95 | 905227S2 |
| 3000K \| 350lm | 17,95 | 905227S4 |

755

LIGHTS



PRIVATE RESIDENCE | BUITENHUIS TUINONDERNEMINGEN BELGIUM

# TUBE

*Outdoor*
*Wall* surface

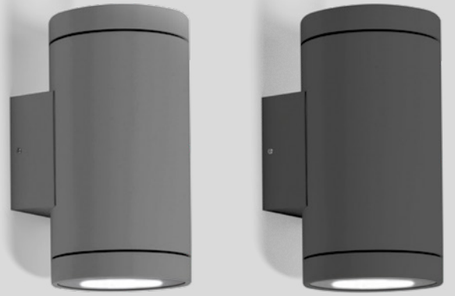







## 2.0 LED

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 2x635lm

| | CHF | CODE |
|---|---|---|
| | 397,45 | 711464W5 |
| | 397,45 | 711464D5 |
| | 397,45 | 711464A5 |
| | 397,45 | 711464B5 |

## 2.0 PAR16

2x PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

| | CHF | CODE |
|---|---|---|
| | 176,65 | 711220W0 |
| | 176,65 | 711220D0 |
| | 176,65 | 711220A0 |
| | 176,65 | 711220Q0 |
| | 176,65 | 711220B0 |

## OPTIONAL

PAR16 3.7W | GU10

| | CHF | CODE |
|---|---|---|
| 2700K \| 350lm | 17,95 | 905227S2 |
| 3000K \| 350lm | 17,95 | 905227S4 |








PRIVATE RESIDENCE | GC ARCHITECTEN BELGIUM

# TAIO

*Outdoor*
*Wall* surface













## 1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

IP65 W-105° L80|55K

| | CHF | CODE |
|---|---|---|
| | 255,30 | 180584W_ |
| | 255,30 | 180584A_ |
| | 255,30 | 180584Q_ |
| | 255,30 | 180584B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 435 | >90 | 3 |
| 3000K | 490 | >90 | 5 |

## 2.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

IP65 W-105° L80|55K

| | CHF | CODE |
|---|---|---|
| | 393,30 | 180684W_ |
| | 393,30 | 180684A_ |
| | 393,30 | 180684Q_ |
| | 393,30 | 180684B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x435 | >90 | 3 |
| 3000K | 2x490 | >90 | 5 |

165
299
747
757
SIZES



**PIARISTENGASSE 23 |** © **LIV.AT** VIENNA | AUSTRIA

# RAY

*Outdoor*
*Wall* surface






251


341 | 377 | 393


537


615


759


100
ø150


100
ø150


160
ø150

## 1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

| | CHF | CODE |
|---|---|---|
| | 273,25 | 749168W_ |
| | 273,25 | 749168B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 350 | >90 | 3 |
| 3000K | 370 | >90 | 5 |

## 2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

| | CHF | CODE |
|---|---|---|
| | 302,25 | 749148W_ |
| | 302,25 | 749148B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x440 | >90 | 3 |
| 3000K | 2x460 | >90 | 5 |

## 4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

| | CHF | CODE |
|---|---|---|
| | 322,25 | 749248W_ |
| | 322,25 | 749248B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x325 | >90 | 3 |
| 3000K | 2x345 | >90 | 5 |

**LOXONE VERSIONS ONLINE**
weverducre.com/more-ray-wall




GALLOP EXTENSION AT SINGAPORE BOTANIC GARDENS | KAY NGEE TAN ARCHITECTS SINGAPORE

# TRAIN

*Outdoor*
*Wall* surface

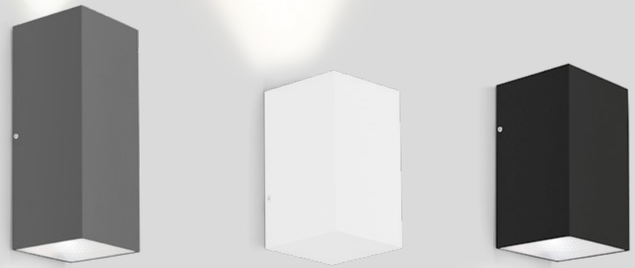













## 1.0 NARROW

LED PCB 6W
220-240VAC | 50-60Hz | incl. driver
aluminium
narrow up or narrow down lens

IP65 W-55°x5° L80|60K

3000K | CRI >80 | 170lm

| | CHF | CODE |
|---|---|---|
| | 245,65 | 718143B4 |

## 1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-38° L70|55K

3000K | CRI >90 | 530lm

| | CHF | CODE |
|---|---|---|
| | 231,85 | 718868W5 |
| | 231,85 | 718868A5 |
| | 231,85 | 718868B5 |

## 2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-38° L70|55K

3000K | CRI >90 | 2x375lm

| | CHF | CODE |
|---|---|---|
| | 300,85 | 718968W5 |
| | 300,85 | 718968A5 |
| | 300,85 | 718968B5 |



**PRIVATE RESIDENCE | OLSTE & HOPROM** BELGIUM

# CENTRAL

*Outdoor*
*Wall* surface









## 1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

3000K | CRI >90 | 620lm

| | CHF | CODE |
|---|---|---|
| | 300,85 | 313774W5 |
| | 300,85 | 313774A5 |
| | 300,85 | 313774Q5 |
| | 300,85 | 313774B5 |

## 2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

3000K | CRI >90 | 2x330lm

| | CHF | CODE |
|---|---|---|
| | 351,90 | 313874W5 |
| | 351,90 | 313874A5 |
| | 351,90 | 313874Q5 |
| | 351,90 | 313874B5 |

617




**PRIVATE RESIDENCE | TRANSFORM ARCHITECTUUR** BELGIUM

# TUBE CARRÉ

*Outdoor*
*Wall* surface











## 1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-32° L80|60K

3000K | CRI >90 | 715lm

| | CHF | CODE |
|---|---|---|
| | 287,05 | 744364W5 |
| | 287,05 | 744364D5 |
| | 287,05 | 744364A5 |
| | 287,05 | 744364B5 |

## 1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

| | CHF | CODE |
|---|---|---|
| | 187,70 | 744120W0 |
| | 187,70 | 744120D0 |
| | 187,70 | 744120A0 |
| | 187,70 | 744120Q0 |
| | 187,70 | 744120B0 |

## OPTIONAL

PAR16 3.7W | GU10

| | CHF | CODE |
|---|---|---|
| 2700K \| 350lm | 17,95 | 905227S2 |
| 3000K \| 350lm | 17,95 | 905227S4 |

763

back



**PRIVATE RESIDENCE | MAA ARCHITECTURE STUDIO & ZPLUS ARCHITECTURE** BELGIUM

# TUBE CARRÉ

*Outdoor*
*Wall* surface









## 2.0 LED

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 2x745lm

| | CHF | CODE |
|---|---|---|
| | 426,45 | 744464W5 |
| | 426,45 | 744464D5 |
| | 426,45 | 744464A5 |
| | 426,45 | 744464B5 |

## 2.0 PAR16

2x PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

| | CHF | CODE |
|---|---|---|
| | 247,05 | 744220W0 |
| | 247,05 | 744220D0 |
| | 247,05 | 744220A0 |
| | 247,05 | 744220Q0 |
| | 247,05 | 744220B0 |

## OPTIONAL

PAR16 3.7W | GU10

| | CHF | CODE |
|---|---|---|
| 2700K \| 350lm | 17,95 | 905227S2 |
| 3000K \| 350lm | 17,95 | 905227S4 |

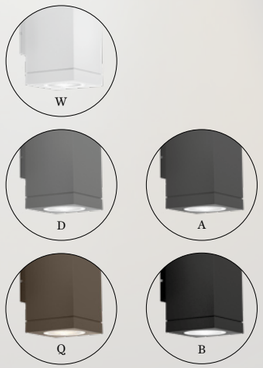


763



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN

# BOX

*Outdoor*
*Wall* surface































**MORE VERSIONS + LOXONE ONLINE**
weverducre.com/more-box-wall

## 1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

| | CHF | CODE |
|---|---|---|
| | 273,25 | 748168W_ |
| | 273,25 | 748168D_ |
| | 273,25 | 748168A_ |
| | 273,25 | 748168Q_ |
| | 273,25 | 748168B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 350 | >90 | 3 |
| 3000K | 370 | >90 | 5 |

## 2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

| | CHF | CODE |
|---|---|---|
| | 302,25 | 748148W_ |
| | 302,25 | 748148D_ |
| | 302,25 | 748148A_ |
| | 302,25 | 748148Q_ |
| | 302,25 | 748148B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x440 | >90 | 3 |
| 3000K | 2x460 | >90 | 5 |

## 4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

| | CHF | CODE |
|---|---|---|
| | 322,95 | 748248W_ |
| | 322,95 | 748248D_ |
| | 322,95 | 748248Q_ |
| | 322,95 | 748248B_ |

incl. adjustable flaps

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x325 | >90 | 3 |
| 3000K | 2x345 | >90 | 5 |

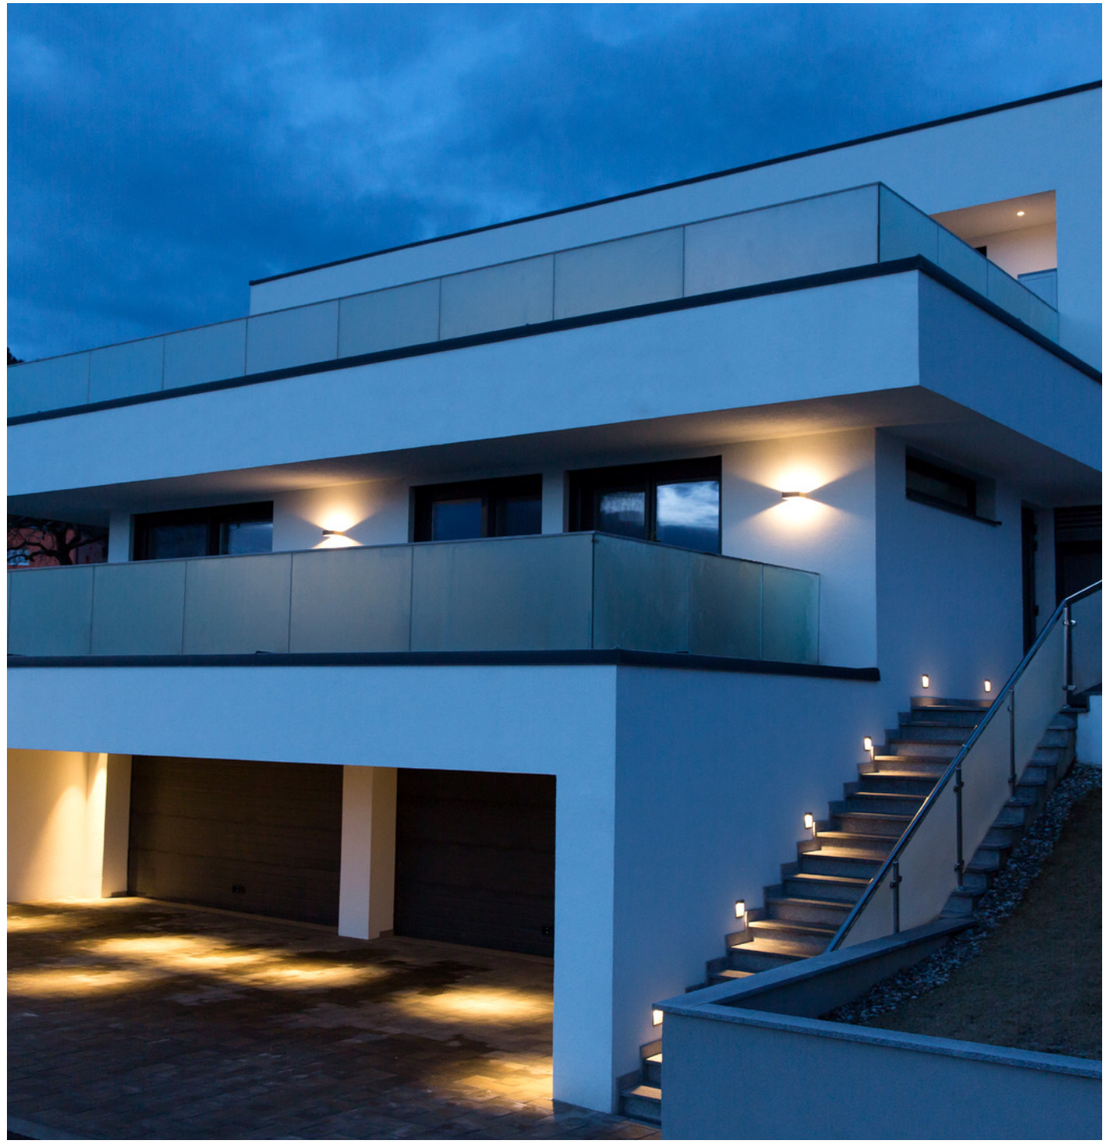

**PRIVATE RESIDENCE** AUSTRIA

# TAPE

*Outdoor*
*Wall* surface






## 1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K




3000K | CRI >90 | 425lm

| | CHF | CODE |
|---|---|---|
| | 411,25 | 722174W5 |
| | 411,25 | 722174D5 |
| | 411,25 | 722174A5 |
| | 411,25 | 722174B5 |

back



**PRIVATE RESIDENCE | BAUBUREAU OG 27** SWITZERLAND

# PALOS

*Outdoor*
*Wall* surface

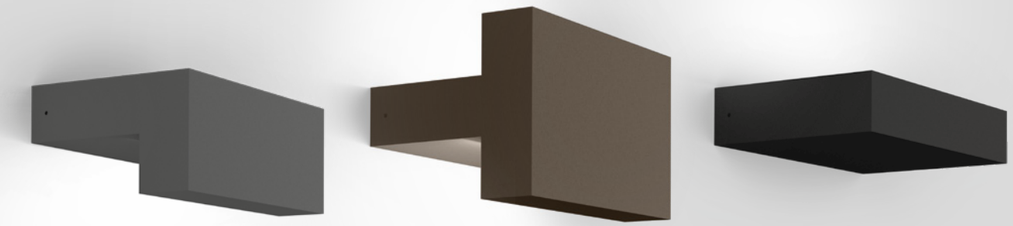




## 1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 365,70 | 4161A4A_ |
| | 365,70 | 4161A4Q_ |
| | 365,70 | 4161A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 680 | >80 | 2 |
| 3000K | 700 | >80 | 4 |




## 2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 452,65 | 4162A4A_ |
| | 452,65 | 4162A4Q_ |
| | 452,65 | 4162A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x600 | >80 | 2 |
| 3000K | 2x620 | >80 | 4 |




## 3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 310,50 | 4163A4A_ |
| | 310,50 | 4163A4Q_ |
| | 310,50 | 4163A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 745 | >80 | 2 |
| 3000K | 770 | >80 | 4 |

877



**PRIVATE RESIDENCE | ELLEMVIE - ART & INTERIEUR** THE NETHERLANDS

# SWAM

*Outdoor*
*Wall* surface










Q


K


B

## 1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 410lm

| | CHF | CODE |
|---|---|---|
| | 329,85 | 746278Q3 |
| | 342,25 | 746278K3 |
| | 329,85 | 746278B3 |

## 2.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 670lm

| | CHF | CODE |
|---|---|---|
| | 390,55 | 746378Q3 |
| | 405,75 | 746378K3 |
| | 390,55 | 746378B3 |

859

# TRADORA

*Outdoor*
*Wall* surface






## 1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

IP65 L80|50K

2700K | CRI >90 | 350lm

| | CHF | CODE |
|---|---|---|
| | 503,70 | 760184CL3 |
| | 503,70 | 760184CQ3 |
| | 489,90 | 760184B3 |


775
777
STEP

# RIBELLE

*Outdoor*
*Wall* surface






**1.0**

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

| | CHF | CODE |
|---|---|---|
| | 448,50 | 772184A_ |
| | 448,50 | 772184Q_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 415 | >90 | 3 |
| 3000K | 425 | >90 | 5 |


709
867
back

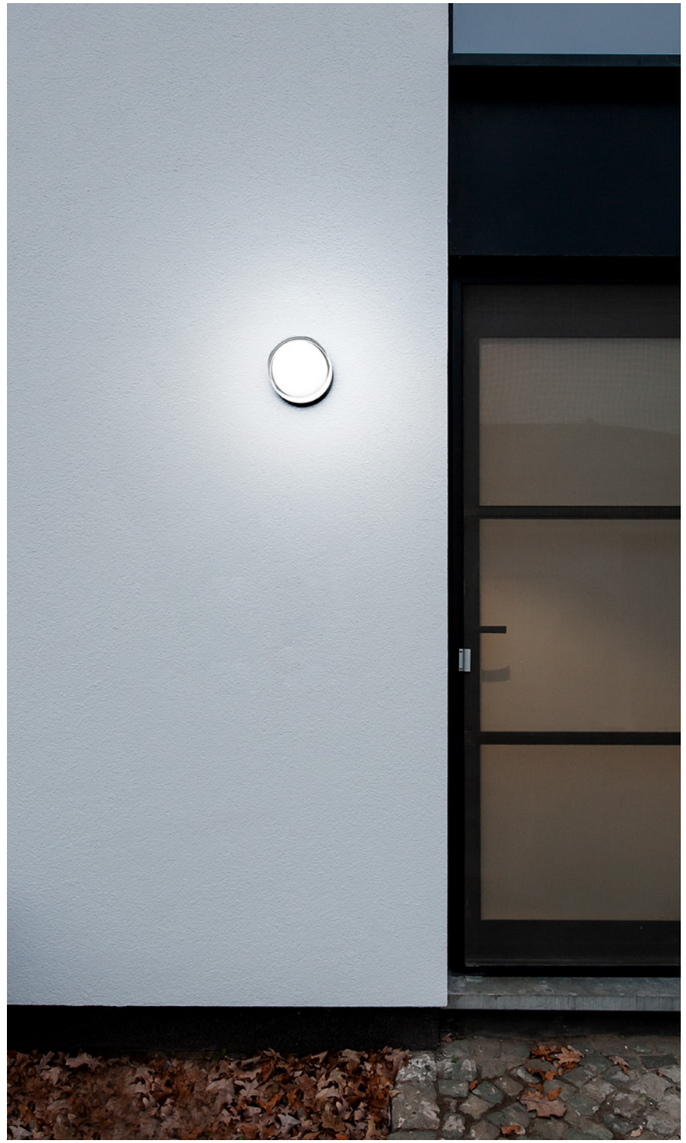

**PRIVATE RESIDENCE** BELGIUM

# BLAS

*Outdoor*
*Wall* surface












## 1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

| | CHF | CODE |
|---|---|---|
| | 314,65 | 736387W5 |
| | 314,65 | 736387B5 |

## 2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

| | CHF | CODE |
|---|---|---|
| | 336,75 | 736487W5 |
| | 336,75 | 736487B5 |








**SHOWROOM CHILLOUT AREA** GRAZ | AUSTRIA

# X-BEAM

*Outdoor*
*Wall* surface













## OPTIONAL

snoot

| | CHF | CODE |
|---|---|---|
| | 48,30 | 90019023 |

snoot round

| | CHF | CODE |
|---|---|---|
| | 48,30 | 90019031 |

specs on page 911




## 1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1590lm

| | CHF | CODE |
|---|---|---|
| | 476,10 | 700374D4 |
| | 476,10 | 700374A4 |
| | 476,10 | 700374B4 |

## 1.0 ROUND

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1520lm

| | CHF | CODE |
|---|---|---|
| | 476,10 | 700474A4 |
| | 476,10 | 700474Q4 |
| | 476,10 | 700474B4 |

IP65
865

# PAVIO

*Outdoor*
*Wall* surface



58
ø150

711

**1.0**

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 525lm

| | CHF | CODE |
|---|---|---|
| | 255,30 | 351184W5 |
| | 255,30 | 351184Q5 |
| | 255,30 | 351184B5 |



**PRIVATE RESIDENCE** SPAIN

# RETO ROUND

*Outdoor*
*Wall* surface

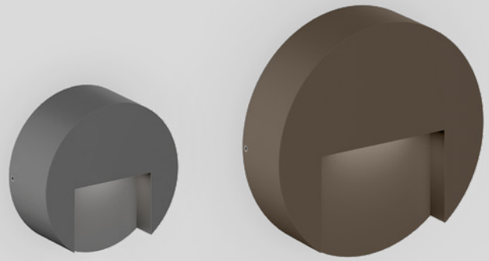







## 0.8

LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 105lm

| | CHF | CODE |
|---|---|---|
| | 218,05 | 7457A4A5 |
| | 218,05 | 7457A4Q5 |
| | 218,05 | 7457A4B5 |

## 1.3

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 160lm

| | CHF | CODE |
|---|---|---|
| | 273,25 | 7458A4A5 |
| | 273,25 | 7458A4Q5 |
| | 273,25 | 7458A4B5 |



**PRIVATE RESIDENCE | RARDO ARCHITECTS** SPAIN

# RETO

*Outdoor*
*Wall* surface

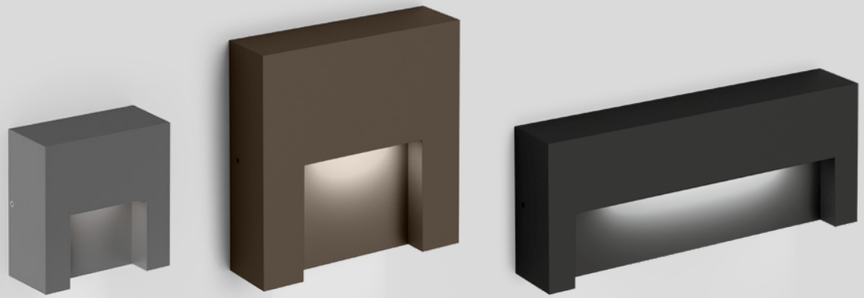










## 0.8

LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 105lm

| | CHF | CODE |
|---|---|---|
| | 218,05 | 7454A4A5 |
| | 218,05 | 7454A4Q5 |
| | 218,05 | 7454A4B5 |

## 1.3

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 160lm

| | CHF | CODE |
|---|---|---|
| | 273,25 | 7455A4A5 |
| | 273,25 | 7455A4Q5 |
| | 273,25 | 7455A4B5 |

## 2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 335lm

| | CHF | CODE |
|---|---|---|
| | 259,45 | 7456A4A5 |
| | 259,45 | 7456A4Q5 |
| | 259,45 | 7456A4B5 |

573
781
RETO

# *Floor* recessed

836 – 853

## RECESSED



**BLINK TRIMLESS**
839



**BLINK**
839



**CARD 0.1**
843



**CARD 0.2**
843



**MAP**
845



**MAP ASYM**
849



**CHART**
851



**CHART ASYM**
853

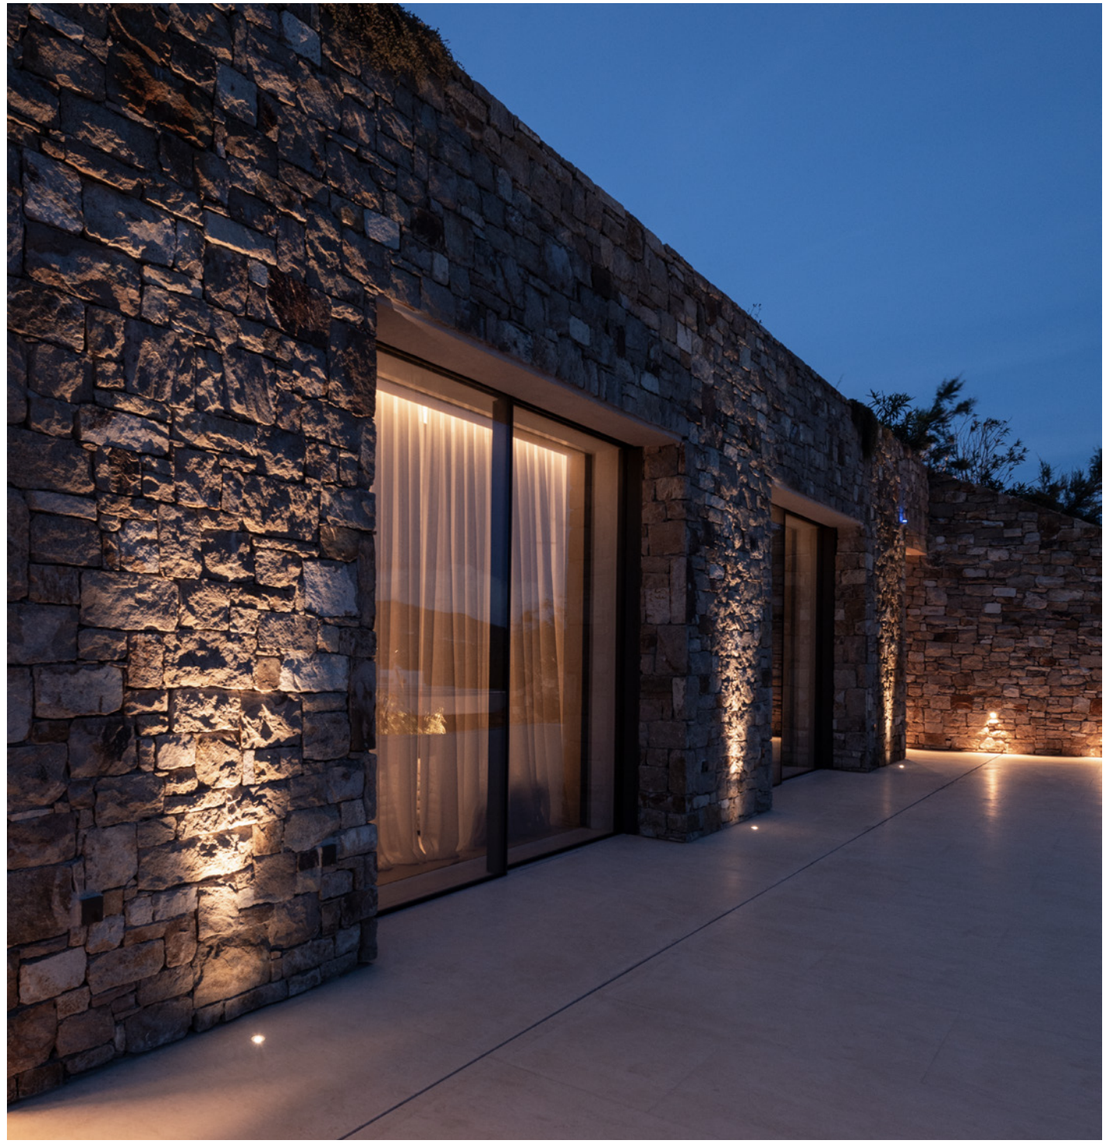

**PRIVATE RESIDENCE** GREECE

# BLINK

*Outdoor*
*trimless / Floor* recessed




## 1.0 TRIMLESS

LED COB 6W | 500mA | 9V
aluminium | glass

IP65 IK08 M-30° L80|50K

3000K | CRI >90 | 410lm

| | CHF | CODE |
|---|---|---|
| | 300,85 | 721261B5 |

## ALWAYS USE

driver | 500mA

| | CHF | CODE |
|---|---|---|
| 7W dim | 35,20 | 90224301 |
| 7W IP67 | 64,20 | 90214301 |

more options and specs on page 898

## ALWAYS USE

recessed ground housing | polyamide

137 110




| | CHF | CODE |
|---|---|---|
| | 34,50 | 90012201 |




## 1.0

LED COB 6W | 500mA | 9V
aluminium | glass

IP65 IK08 M-30° L80|50K

47-49

3000K | CRI >90 | 410lm

| | CHF | CODE |
|---|---|---|
| | 282,90 | 721161B5 |

## ALWAYS USE

driver | 500mA

| | CHF | CODE |
|---|---|---|
| 7W dim | 35,20 | 90224301 |
| 7W IP67 | 64,20 | 90214301 |

more options and specs on page 898

## OPTIONAL

recessed ground housing | polyamide

137 110




| | CHF | CODE |
|---|---|---|
| | 34,50 | 90012201 |



# BLINK

*Outdoor*
*trimless / Floor* recessed




## 2.0 TRIMLESS

LED COB 11W | 500mA | 20V
aluminium | glass

IP65 IK08 M-38° L80|50K

3000K | CRI >90 | 700lm

| | CHF | CODE |
|---|---|---|
| | 329,85 | 721461B5 |

## ALWAYS USE

driver | 500mA

| | CHF | CODE |
|---|---|---|
| 20W dim | 62,80 | 90224602 |
| 24W IP68 | 102,15 | 90214702 |

more options and specs on page 898

## ALWAYS USE

recessed ground housing | polyamide

137 130




| | CHF | CODE |
|---|---|---|
| | 46,95 | 90012202 |




## 2.0

LED COB 11W | 500mA | 20V
aluminium | glass

IP65 IK08 M-38° L80|50K

84-86

3000K | CRI >90 | 700lm

| | CHF | CODE |
|---|---|---|
| | 316,05 | 721361B5 |

## ALWAYS USE

driver | 500mA

| | CHF | CODE |
|---|---|---|
| 20W dim | 62,80 | 90224602 |
| 24W IP68 | 102,15 | 90214702 |

more options and specs on page 898

## OPTIONAL

recessed ground housing | polyamide

137 130




| | CHF | CODE |
|---|---|---|
| | 46,95 | 90012202 |





**DIJLEPAD** MECHELEN | BELGIUM

# CARD

*Outdoor*
*Floor* recessed




## 0.1

LED PCB 2W | 350mA | 3V
aluminium | stainless steel | glass

IP67 IK07 N-16° L70|60K

22-24 60

3000K | CRI >80 | 90lm

| | CHF | CODE |
|---|---|---|
| | 118,70 | 750141I4 |

### ALWAYS USE

driver | IP66

| | CHF | CODE |
|---|---|---|
| 3W | 350mA | 48,30 | 90213101 |

more options and specs on page 897




## 0.2

LED PCB 2W | 350mA | 3V
aluminium | stainless steel | glass

IP67 IK07 N-16° L70|60K

22-24 60

3000K | CRI >80 | 90lm

| | CHF | CODE |
|---|---|---|
| | 146,30 | 750241I4 |

### ALWAYS USE

driver | IP66

| | CHF | CODE |
|---|---|---|
| 3W | 350mA | 48,30 | 90213101 |

more options and specs on page 897







**PRIVATE RESIDENCE | RARDO ARCHITECTS** SPAIN

# MAP

*Outdoor*
*Floor* recessed




## 0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-43° L70|55K

100

3000K | CRI >90 | 310lm

| | CHF | CODE |
|---|---|---|
| | 282,90 | 751168I5 |

## OPTIONAL

recessed ground housing | polyamide

137 110




| | CHF | CODE |
|---|---|---|
| | 34,50 | 90012201 |




## 0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 M-35° L70|55K

135

3000K | CRI >90 | 685lm

| | CHF | CODE |
|---|---|---|
| | 314,65 | 751268I5 |

## OPTIONAL

recessed ground housing | polyamide

137 130




| | CHF | CODE |
|---|---|---|
| | 46,95 | 90012202 |





**TOPSPORTSCHOOL | UAU COLLECTIVE** HASSELT | BELGIUM

# MAP

*Outdoor*
*Floor* recessed




## 1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-44° L70|55K

120

3000K | CRI >90 | 995lm

| | CHF | CODE |
|---|---|---|
| | 383,65 | 751368I5 |

## OPTIONAL

recessed ground housing | polyamide

190 158




| | CHF | CODE |
|---|---|---|
| | 64,90 | 90012203 |




## 1.6

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK09 M-38° L70|55K

185

3000K | CRI >90 | 1260lm

| | CHF | CODE |
|---|---|---|
| | 565,80 | 75146815 |

## OPTIONAL

recessed ground housing | polyamide

220 184




| | CHF | CODE |
|---|---|---|
| | 84,20 | 90012204 |





PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

# MAP ASYM

*Outdoor*
*Floor* recessed




## 1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK08 L70|55K

160

3000K | CRI >90 | 565lm

| | CHF | CODE |
|---|---|---|
| | 411,25 | 7515A8I5 |

## OPTIONAL

recessed ground housing | polyamide

190 158




| | CHF | CODE |
|---|---|---|
| | 64,90 | 90012203 |




## 1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 L70|55K

185

3000K | CRI >90 | 845lm

| | CHF | CODE |
|---|---|---|
| | 607,20 | 7516A8I5 |

## OPTIONAL

recessed ground housing | polyamide

220 184




| | CHF | CODE |
|---|---|---|
| | 84,20 | 90012204 |







**PRIVATE RESIDENCE** FRANCE

# CHART

*Outdoor*
*Floor* recessed




## 0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-43° L70|55K

L118

3000K | CRI >90 | 310lm

| CHF | CODE |
|---|---|
| 287,05 | 752168I5 |

## OPTIONAL

recessed ground housing | polyamide

Ø137 L110




| CHF | CODE |
|---|---|
| 34,50 | 90012201 |




## 0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 M-35° L70|55K

L135

3000K | CRI >90 | 640lm

| CHF | CODE |
|---|---|
| 322,95 | 752268I5 |

## OPTIONAL

recessed ground housing | polyamide

Ø137 L130




| CHF | CODE |
|---|---|
| 46,95 | 90012202 |




## 1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-44° L70|55K

L175

3000K | CRI >90 | 995lm

| CHF | CODE |
|---|---|
| 393,30 | 752368I5 |

## OPTIONAL

recessed ground housing | polyamide

Ø190 L158




| CHF | CODE |
|---|---|
| 64,90 | 90012203 |




## 1.6

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK09 M-38° L70|55K

L185

3000K | CRI >90 | 1260lm

| CHF | CODE |
|---|---|
| 586,50 | 752468I5 |

## OPTIONAL

recessed ground housing | polyamide

Ø220 L184




| CHF | CODE |
|---|---|
| 84,20 | 90012204 |

# CHART ASYM

*Outdoor*
*Floor* recessed




## 1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK08 L70|55K

160

3000K | CRI >90 | 565lm

| | CHF | CODE |
|---|---|---|
| | 420,90 | 7525A8I5 |




## 1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 L70|55K

185

3000K | CRI >90 | 845lm

| | CHF | CODE |
|---|---|---|
| | 627,90 | 7526A8I5 |



## OPTIONAL

recessed ground housing | polyamide

190 158




| | CHF | CODE |
|---|---|---|
| | 64,90 | 90012203 |

## OPTIONAL

recessed ground housing | polyamide

220 184




| | CHF | CODE |
|---|---|---|
| | 84,20 | 90012204 |

# *Floor* surface

854 - 891

## LUMINAIRES



**KIOSK 1.1**
857



**KIOSK 1.2**
857



**KIOSK 1.3**
857



**SWAM**
859



**SWAM**
859

## PROJECTORS



**STIPO 1.0**
863



**STIPO 4.0**
863



**X-BEAM**
865



**X-BEAM ROUND**
865

## BOLLARDS



**RIBELLE**
867



**GATE ROUND 1.0**
869



**GATE ROUND 2.0**
869



**GATE CARRÉ 1.0**
871



**GATE CARRÉ 2.0**
871



**PALOS ROUND**
873



**PALOS CARRÉ**
877



**LINUS**
881

## PLUG & PLAY



**GEO 1.0**
885



**GEO 2.0**
885



**REED 1.0**
887



**REED 2.0**
887



**POLA 2.0**
889



**POLA 2.1**
889



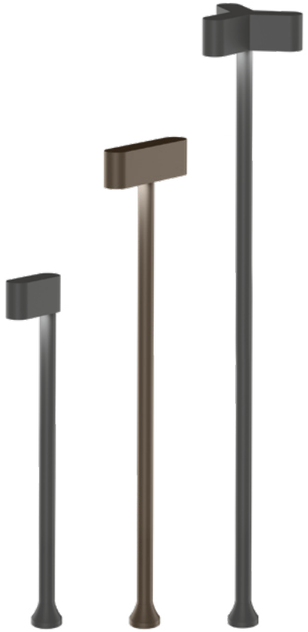

# KIOSK

*Outdoor*
*Floor* surface




## 1.1

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 395lm

| | CHF | CODE |
|---|---|---|
| | 242,90 | 7072A4A5 |
| | 242,90 | 7072A4Q5 |

### ALWAYS USE

pole | incl. ground spike

| | CHF | CODE |
|---|---|---|
| 400 | 157,35 | 910101_0 |
| 600 | 172,50 | 910102_0 |
| 800 | 190,45 | 910103_0 |

| | CODE |
|---|---|
| | A |
| | Q |

order fixation separately

### OPTIONAL

ground fixation plate

| | CHF | CODE |
|---|---|---|
| | 30,40 | 90019019 |




## 1.2

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 2x380lm

| | CHF | CODE |
|---|---|---|
| | 273,25 | 7073A4A5 |
| | 273,25 | 7073A4Q5 |

### ALWAYS USE

pole | incl. ground spike

| | CHF | CODE |
|---|---|---|
| 400 | 157,35 | 910101_0 |
| 600 | 172,50 | 910102_0 |
| 800 | 190,45 | 910103_0 |

| | CODE |
|---|---|
| | A |
| | Q |

order fixation separately

### OPTIONAL

ground fixation plate

| | CHF | CODE |
|---|---|---|
| | 30,40 | 90019019 |




## 1.3

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 3x375lm

| | CHF | CODE |
|---|---|---|
| | 328,45 | 7074A4A5 |
| | 328,45 | 7074A4Q5 |

### ALWAYS USE

pole | incl. ground spike

| | CHF | CODE |
|---|---|---|
| 400 | 157,35 | 910101_0 |
| 600 | 172,50 | 910102_0 |
| 800 | 190,45 | 910103_0 |

| | CODE |
|---|---|
| | A |
| | Q |

order fixation separately

### OPTIONAL

ground fixation plate

| | CHF | CODE |
|---|---|---|
| | 30,40 | 90019019 |

793



**PRIVATE RESIDENCE** AUSTRIA

# SWAM

*Outdoor*
*Floor* surface






## 1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 310lm

| | CHF | CODE |
|---|---|---|
| | 379,50 | 746178Q3 |
| | 390,55 | 746178K3 |
| | 379,50 | 746178B3 |

## ALWAYS USE

straight pole | incl. ground spike

| | CHF | CODE |
|---|---|---|
| 400 | 142,15 | 910090_0 |
| 600 | 158,70 | 910091_0 |
| 800 | 176,65 | 910092_0 |

| | CODE |
|---|---|
| | B |
| | Q |

order fixation separately

## OPTIONAL

ground fixation plate

| | CHF | CODE |
|---|---|---|
| | 30,40 | 90019019 |




## 1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 310lm

| | CHF | CODE |
|---|---|---|
| | 379,50 | 746178Q3 |
| | 390,55 | 746178K3 |
| | 379,50 | 746178B3 |

## ALWAYS USE

curved pole | incl. ground spike

| | CHF | CODE |
|---|---|---|
| 400 | 196,00 | 910093_0 |
| 600 | 198,75 | 910094_0 |
| 800 | 213,90 | 910095_0 |

| | CODE |
|---|---|
| | B |
| | Q |

order fixation separately

## OPTIONAL

ground fixation plate

| | CHF | CODE |
|---|---|---|
| | 30,40 | 90019019 |

821












**SHOWROOM CHILLOUT AREA** GRAZ | AUSTRIA

# STIPO

*Outdoor*
*Floor* surface













## 1.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 450lm

| | CHF | CODE |
|---|---|---|
| | 274,65 | 737168A5 |
| | 274,65 | 737168Q5 |

## 2.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 500lm

| | CHF | CODE |
|---|---|---|
| | 271,90 | 737268A5 |
| | 271,90 | 737268Q5 |

## 3.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 450lm

| | CHF | CODE |
|---|---|---|
| | 270,50 | 737368A5 |
| | 270,50 | 737368Q5 |

### ALWAYS USE

pole

| | CHF | CODE |
|---|---|---|
| 200 | 46,95 | 910062_0 |
| 400 | 52,45 | 910064_0 |
| 600 | 56,60 | 910066_0 |

| | CODE |
|---|---|
| | A |
| | Q |

order spike separately

### OPTIONAL

ground spike

| | CHF | CODE |
|---|---|---|
| | 37,30 | 90013106 |

## 4.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 500lm

| | CHF | CODE |
|---|---|---|
| | 267,75 | 737468A5 |
| | 267,75 | 737468Q5 |

### ALWAYS USE

pole

| | CHF | CODE |
|---|---|---|
| 200 | 46,95 | 910062_0 |
| 400 | 52,45 | 910064_0 |
| 600 | 56,60 | 910066_0 |

| | CODE |
|---|---|
| | A |
| | Q |

order spike separately

### OPTIONAL

ground spike

| | CHF | CODE |
|---|---|---|
| | 37,30 | 90013106 |

### OPTIONAL

ground spike

| | CHF | CODE |
|---|---|---|
| | 37,30 | 90013106 |

### OPTIONAL

ground spike

| | CHF | CODE |
|---|---|---|
| | 37,30 | 90013106 |



# X-BEAM

*Outdoor*
*Floor* surface













## OPTIONAL

ground spike

| | CHF | CODE |
|---|---|---|
| | 40,05 | 90013115 |

snoot

| | CHF | CODE |
|---|---|---|
| | 48,30 | 90019023 |

snoot round

| | CHF | CODE |
|---|---|---|
| | 48,30 | 90019031 |




## 1.0

LED COB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1590lm

| | CHF | CODE |
|---|---|---|
| | 476,10 | 700374D4 |
| | 476,10 | 700374A4 |
| | 476,10 | 700374B4 |

## 1.0 ROUND

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1520lm

| | CHF | CODE |
|---|---|---|
| | 476,10 | 700474A4 |
| | 476,10 | 700474Q4 |
| | 476,10 | 700474B4 |

829

# RIBELLE

*Outdoor*
*Floor* surface






## 1.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

| | CHF | CODE |
|---|---|---|
| | 524,40 | 772284A_ |
| | 524,40 | 772284Q_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 590 | >90 | 3 |
| 3000K | 610 | >90 | 5 |




## 2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

| | CHF | CODE |
|---|---|---|
| | 614,10 | 772384A_ |
| | 614,10 | 772384Q_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 590 | >90 | 3 |
| 3000K | 610 | >90 | 5 |

709
825

# GATE ROUND

*Outdoor*
*Floor* surface

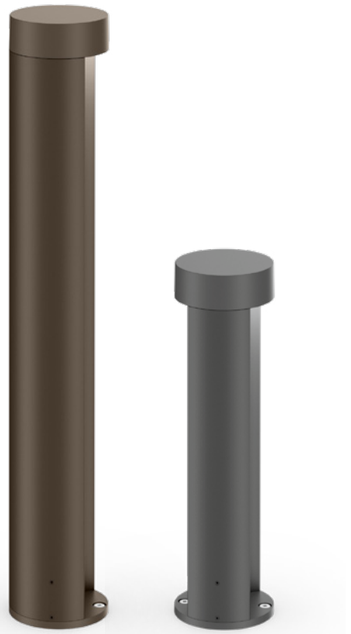




## 1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

| | CHF | CODE |
|---|---|---|
| | 213,90 | 7581A4A_ |
| | 213,90 | 7581A4Q_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 400 | >80 | 2 |
| 3000K | 420 | >80 | 4 |

### ALWAYS USE

pole with fixation plate

| | CHF | CODE |
|---|---|---|
| 250 | 80,05 | 910121_0 |
| 450 | 95,25 | 910122_0 |
| 650 | 121,45 | 910123_0 |

| | CODE |
|---|---|
| | A |
| | Q |




## 2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

| | CHF | CODE |
|---|---|---|
| | 255,30 | 7582A4A_ |
| | 255,30 | 7582A4Q_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x290 | >80 | 2 |
| 3000K | 2x305 | >80 | 4 |

### ALWAYS USE

pole with fixation plate

| | CHF | CODE |
|---|---|---|
| 250 | 80,05 | 910124_0 |
| 450 | 95,25 | 910125_0 |
| 650 | 121,45 | 910126_0 |

| | CODE |
|---|---|
| | A |
| | Q |

# GATE CARRÉ

*Outdoor*
*Floor* surface

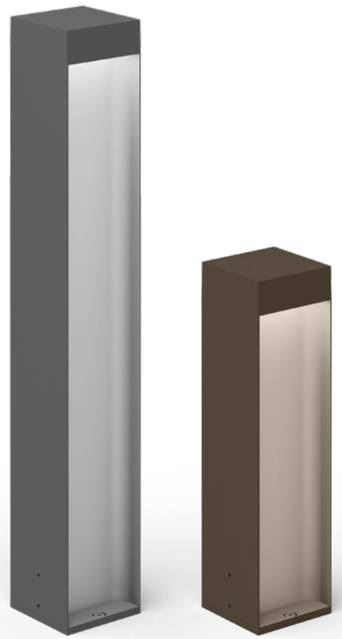




## 1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

| | CHF | CODE |
|---|---|---|
| | 218,05 | 7583A4A_ |
| | 218,05 | 7583A4Q_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 400 | >80 | 2 |
| 3000K | 420 | >80 | 4 |

## ALWAYS USE

pole with fixation plate

| | CHF | CODE |
|---|---|---|
| 250 | 91,10 | 910111_0 |
| 450 | 106,30 | 910112_0 |
| 650 | 132,50 | 910113_0 |

| | CODE |
|---|---|
| | A |
| | Q |




## 2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

| | CHF | CODE |
|---|---|---|
| | 259,45 | 7584A4A_ |
| | 259,45 | 7584A4Q_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x290 | >80 | 2 |
| 3000K | 2x305 | >80 | 4 |

## ALWAYS USE

pole with fixation plate

| | CHF | CODE |
|---|---|---|
| 250 | 91,10 | 910114_0 |
| 450 | 106,30 | 910115_0 |
| 650 | 132,50 | 910116_0 |

| | CODE |
|---|---|
| | A |
| | Q |



# PALOS ROUND

*Outdoor*
*Floor* surface




**1.0**

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 300,85 | 4166A4A_ |
| | 300,85 | 4166A4Q_ |
| | 300,85 | 4166A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 680 | >80 | 2 |
| 3000K | 700 | >80 | 4 |

**ALWAYS USE**

pole with fixation plate

| | CHF | CODE |
|---|---|---|
| 170 | 135,25 | 910013_0 |
| 270 | 149,05 | 910014_0 |
| 470 | 169,75 | 910016_0 |
| 670 | 187,70 | 910018_0 |
| 870 | 213,90 | 910010_0 |

| | CODE |
|---|---|
| | A |
| | Q |
| | B |




**1.0**

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 300,85 | 4166A4A_ |
| | 300,85 | 4166A4Q_ |
| | 300,85 | 4166A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 680 | >80 | 2 |
| 3000K | 700 | >80 | 4 |

**ALWAYS USE**

pole with concrete fixation

| | CHF | CODE |
|---|---|---|
| 170 | 171,15 | 910073_0 |
| 270 | 187,70 | 910074_0 |
| 470 | 204,25 | 910076_0 |
| 670 | 223,60 | 910078_0 |
| 870 | 259,45 | 910070_0 |

| | CODE |
|---|---|
| | A |
| | Q |
| | B |

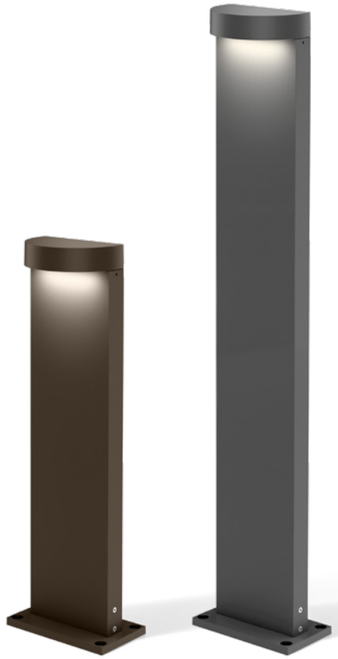



# PALOS ROUND

*Outdoor*
*Floor* surface

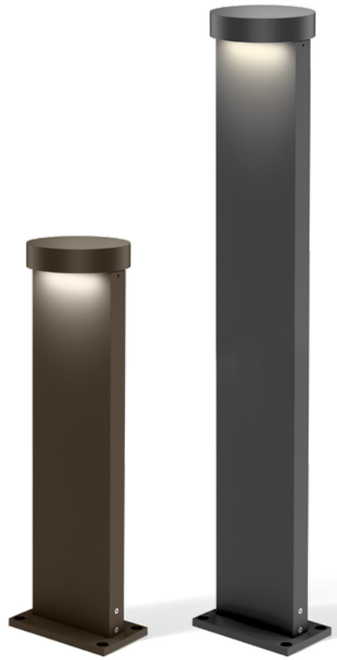




## 2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 411,25 | 4167A4A_ |
| | 411,25 | 4167A4Q_ |
| | 411,25 | 4167A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x655 | >80 | 2 |
| 3000K | 2x675 | >80 | 4 |

## ALWAYS USE

pole with fixation plate

| | CHF | CODE |
|---|---|---|
| 170 | 135,25 | 910013_0 |
| 270 | 149,05 | 910014_0 |
| 470 | 169,75 | 910016_0 |
| 670 | 187,70 | 910018_0 |
| 870 | 213,90 | 910010_0 |

| | CODE |
|---|---|
| | A |
| | Q |
| | B |




## 2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 411,25 | 4167A4A_ |
| | 411,25 | 4167A4Q_ |
| | 411,25 | 4167A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x655 | >80 | 2 |
| 3000K | 2x675 | >80 | 4 |

## ALWAYS USE

pole with concrete fixation

| | CHF | CODE |
|---|---|---|
| 170 | 171,15 | 910073_0 |
| 270 | 187,70 | 910074_0 |
| 470 | 204,25 | 910076_0 |
| 670 | 223,60 | 910078_0 |
| 870 | 259,45 | 910070_0 |

| | CODE |
|---|---|
| | A |
| | Q |
| | B |



**PRIVATE RESIDENCE | OPEN ARCHITECTES** BELGIUM

# PALOS CARRÉ

*Outdoor*
*Floor* surface

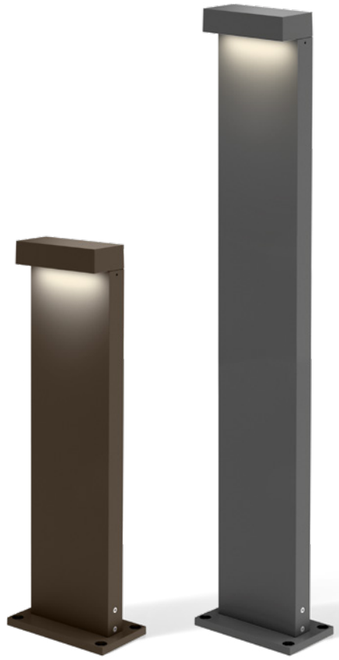




## 1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 300,85 | 4164A4A_ |
| | 300,85 | 4164A4Q_ |
| | 300,85 | 4164A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 680 | >80 | 2 |
| 3000K | 700 | >80 | 4 |

## ALWAYS USE

pole with fixation plate

| | CHF | CODE |
|---|---|---|
| 170 | 135,25 | 910013_0 |
| 270 | 149,05 | 910014_0 |
| 470 | 169,75 | 910016_0 |
| 670 | 187,70 | 910018_0 |
| 870 | 213,90 | 910010_0 |

| | CODE |
|---|---|
| | A |
| | Q |
| | B |




## 1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K g

| | CHF | CODE |
|---|---|---|
| | 300,85 | 4164A4A_ |
| | 300,85 | 4164A4Q_ |
| | 300,85 | 4164A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 680 | >80 | 2 |
| 3000K | 700 | >80 | 4 |

## ALWAYS USE

pole with concrete fixation

| | CHF | CODE |
|---|---|---|
| 170 | 171,15 | 910073_0 |
| 270 | 187,70 | 910074_0 |
| 470 | 204,25 | 910076_0 |
| 670 | 223,60 | 910078_0 |
| 870 | 259,45 | 910070_0 |

| | CODE |
|---|---|
| | A |
| | Q |
| | B |

819



# PALOS CARRÉ

*Outdoor*
*Floor* surface

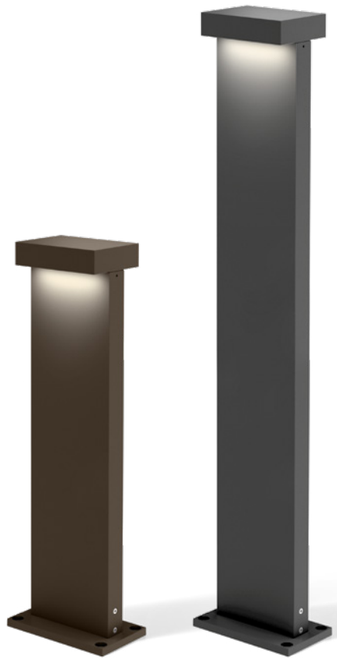




## 2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 411,25 | 4165A4A_ |
| | 411,25 | 4165A4Q_ |
| | 411,25 | 4165A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x655 | >80 | 2 |
| 3000K | 2x675 | >80 | 4 |

## ALWAYS USE

pole with fixation plate

| | CHF | CODE |
|---|---|---|
| 170 | 135,25 | 910013_0 |
| 270 | 149,05 | 910014_0 |
| 470 | 169,75 | 910016_0 |
| 670 | 187,70 | 910018_0 |
| 870 | 213,90 | 910010_0 |

| | CODE |
|---|---|
| | A |
| | Q |
| | B |




## 2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

| | CHF | CODE |
|---|---|---|
| | 411,25 | 4165A4A_ |
| | 411,25 | 4165A4Q_ |
| | 411,25 | 4165A4B_ |

| LIGHT COLOUR | LUMEN | CRI | CODE |
|---|---|---|---|
| 2700K | 2x655 | >80 | 2 |
| 3000K | 2x675 | >80 | 4 |

## ALWAYS USE

pole with concrete fixation

| | CHF | CODE |
|---|---|---|
| 170 | 171,15 | 910073_0 |
| 270 | 187,70 | 910074_0 |
| 470 | 204,25 | 910076_0 |
| 670 | 223,60 | 910078_0 |
| 870 | 259,45 | 910070_0 |

| | CODE |
|---|---|
| | A |
| | Q |
| | B |

819

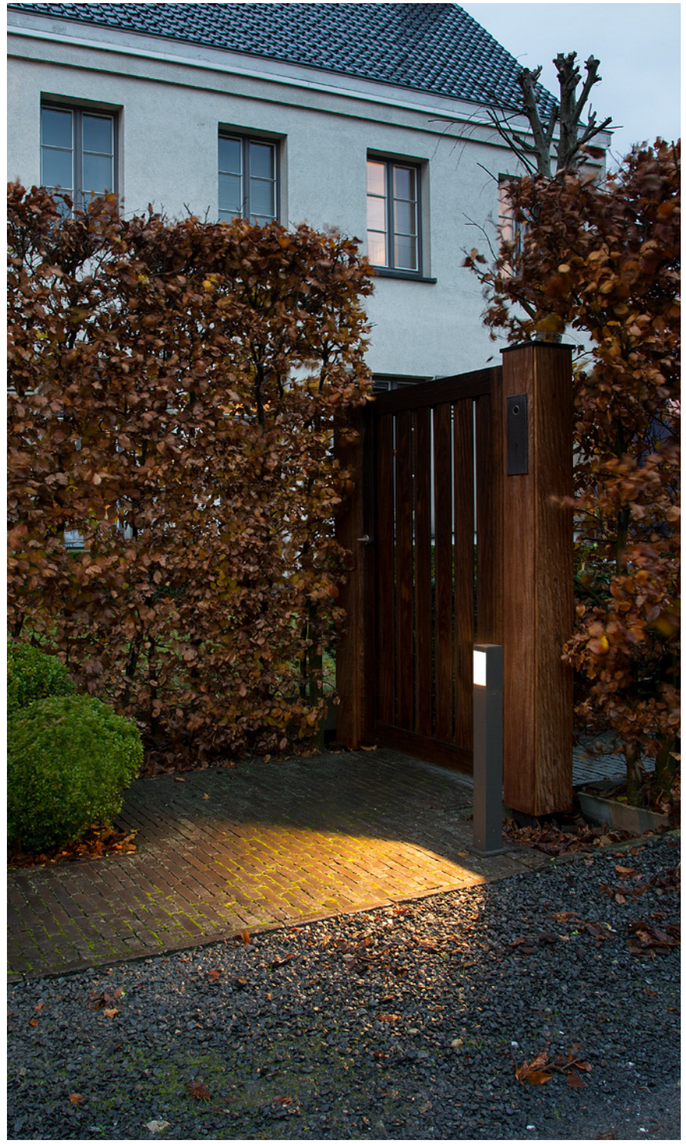

**PRIVATE RESIDENCE** BELGIUM

# LINUS

*Outdoor*
*Floor* surface




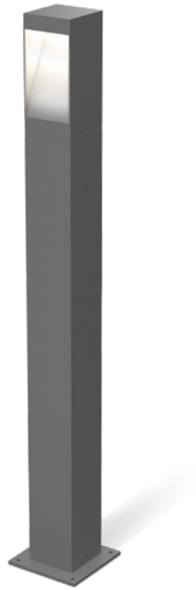

## 3.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L70|50K

3000K | CRI >90 | 215lm

| | CHF | CODE |
|---|---|---|
| | 233,25 | 726378D5 |
| | 233,25 | 726378A5 |
| | 233,25 | 726378Q5 |

## OPTIONAL

ground spike

| | CHF | CODE |
|---|---|---|
| | 85,60 | 90013103 |

ground fixation

| | CHF | CODE |
|---|---|---|
| | 85,60 | 90013302 |

## ALWAYS USE

pole

| | CHF | CODE |
|---|---|---|
| 150 | 114,55 | 910024_0 |
| 350 | 150,45 | 910026_0 |
| 550 | 191,85 | 910028_0 |

| | CODE |
|---|---|
| | D |
| | A |
| | Q |

# driver

ONE DRIVER IS ALL YOU NEED

Sie setzen Fassaden in Szene, beleuchten den Garten und machen Wege im Dunkeln sichtbar – moderne Outdoor-Leuchten sind echte Alleskönner. Mit dem 24V Plug & Play Connector System gelingt die Installation besonders leicht: Steckdose, passender Treiber und schon lassen sich mehrere Leuchten anschließen.

Elles mettent les façades en valeur, éclairent le jardin et rendent les allées visibles la nuit – les luminaires extérieurs modernes sont de véritables polyvalents. Avec le système 24V Plug & Play, l'installation est simple : une prise, un driver adapté et plusieurs luminaires se connectent facilement.

weverducre.com/24V-plugplay

## 1 CHOOSE YOUR LUMINAIRES



**GEO**
page 885

**REED**
page 887

**POLA**
page 889

Two, three, four, or even more, the choice is yours! The number of lights and the sum of their individual wattages is the first thing you need to know to get started with your Plug & Play Connector System.

GOOD TO KNOW
24V Plug & Play Connector System recommends adding 2 or more luminaires to the driver.

## 2 DEFINE THE DISTANCE BETWEEN DRIVER AND LUMINAIRE

Adjacent or far away. The distance between the driver and the first light is very important as it determines the further options of your 24V Plug & Play Connector System lighting solution. You can find detailed information about your options at weverducre.com/24V-cable-length

GOOD TO KNOW
Each driver is supplied with two 2.5m cables, one for each side.

## 3 CHOOSE YOUR DRIVER AND SET UP YOUR LUMINAIRES

Accessory options on page 927

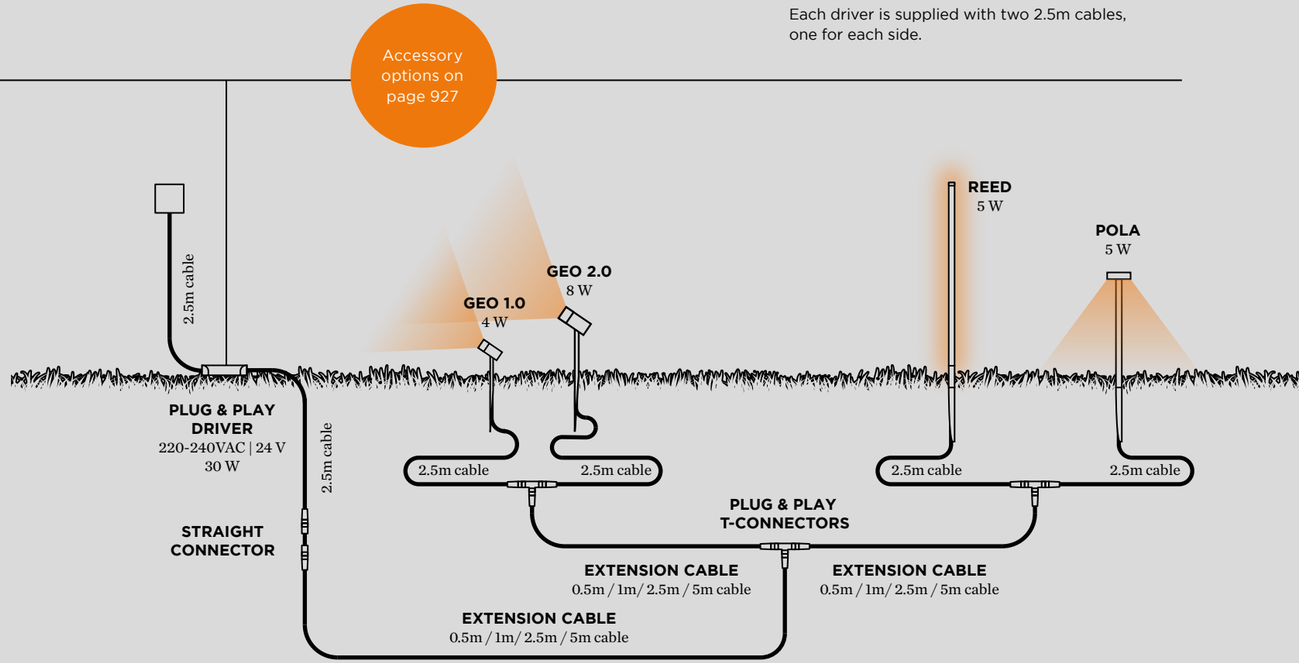






# GEO

*Outdoor*
*Floor* surface

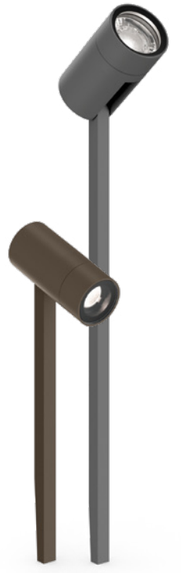

Plug & Play
24V




## ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

| CHF | CODE |
|---|---|
| 13,15 | 90014504 |

Plug & Play t-connector IP67
3x 24V female connector

| CHF | CODE |
|---|---|
| 21,40 | 90014501 |

## OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

| | CHF | CODE |
|---|---|---|
| 0.5m | 22,10 | 90014505 |
| 1m | 35,90 | 90014506 |
| 2.5m | 52,45 | 90014502 |
| 5m | 80,05 | 90014503 |




## 1.0

LED PCB 4W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F 0°-135° M-30° L80|50K

2700K | CRI >90 | 245lm

| | CHF | CODE |
|---|---|---|
| | 178,05 | 767562A3 |
| | 178,05 | 767562Q3 |

## ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

| | CHF | CODE |
|---|---|---|
| 30W | 136,65 | 90018014 |
| 75W | 164,25 | 90018015 |




## 2.0

LED PCB 8W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F 0°-135° M-33° L80|50K

2700K | CRI >90 | 440lm

| | CHF | CODE |
|---|---|---|
| | 317,40 | 767662A3 |
| | 317,40 | 767662Q3 |

## ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

| | CHF | CODE |
|---|---|---|
| 30W | 136,65 | 90018014 |
| 75W | 164,25 | 90018015 |



# REED

*Outdoor*
*Floor* surface



Plug & Play
24V

## ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

| | CHF | CODE |
|---|---|---|
| | 13,15 | 90014504 |

Plug & Play t-connector IP67
3x 24V female connector

| | CHF | CODE |
|---|---|---|
| | 21,40 | 90014501 |

## OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

| | CHF | CODE |
|---|---|---|
| 0.5m | 22,10 | 90014505 |
| 1m | 35,90 | 90014506 |
| 2.5m | 52,45 | 90014502 |
| 5m | 80,05 | 90014503 |




## 1.0

LED PCB 5W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|50K

2700K | CRI >90 | 330lm

| | CHF | CODE |
|---|---|---|
| | 196,00 | 770182A3 |
| | 196,00 | 770182Q3 |

## ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

| | CHF | CODE |
|---|---|---|
| 30W | 136,65 | 90018014 |
| 75W | 164,25 | 90018015 |




## 2.0

LED PCB 6W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|50K

2700K | CRI >90 | 395lm

| | CHF | CODE |
|---|---|---|
| | 237,40 | 770282A3 |
| | 237,40 | 770282Q3 |

## ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

| | CHF | CODE |
|---|---|---|
| 30W | 136,65 | 90018014 |
| 75W | 164,25 | 90018015 |



PRIVATE RESIDENCE AUSTRIA

# POLA

*Outdoor*
*Floor* surface

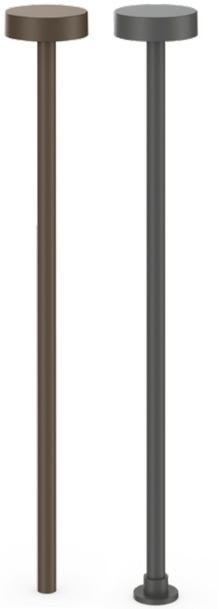

Plug & Play
24V

## ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

| CHF | CODE |
|---|---|
| 13,15 | 90014504 |

Plug & Play t-connector IP67
3x 24V female connector

| CHF | CODE |
|---|---|
| 21,40 | 90014501 |

## OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

| | CHF | CODE |
|---|---|---|
| 0.5m | 22,10 | 90014505 |
| 1m | 35,90 | 90014506 |
| 2.5m | 52,45 | 90014502 |
| 5m | 80,05 | 90014503 |




## 2.0

LED PCB 5W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|100K

2700K | CRI >90 | 250lm

| | CHF | CODE |
|---|---|---|
| | 273,25 | 7381A2A3 |
| | 273,25 | 7381A2Q3 |

## ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

| | CHF | CODE |
|---|---|---|
| 30W | 136,65 | 90018014 |
| 75W | 164,25 | 90018015 |




## 2.1

LED PCB 5W | 24V | fixation plate
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|100K

2700K | CRI >90 | 250lm

| | CHF | CODE |
|---|---|---|
| | 270,50 | 7382A2A3 |
| | 270,50 | 7382A2Q3 |

## ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

| | CHF | CODE |
|---|---|---|
| 30W | 136,65 | 90018014 |
| 75W | 164,25 | 90018015 |

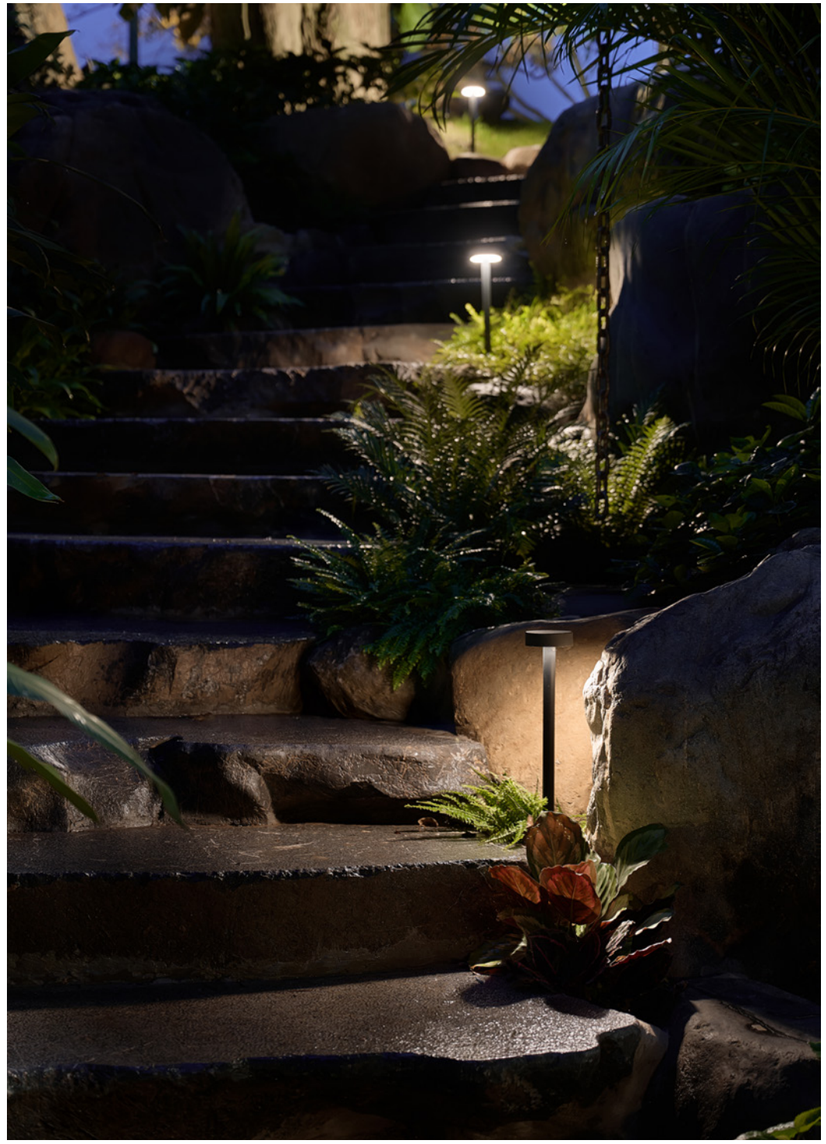



# acces

# sories

# DRIVER | CONTROL GEAR

*Accessories*




easy and fast installation with
quick connectors pre assembled
on our drivers and modules

## DRIVER 180mA 7.5W DIM

7.5W | 180mA | 27-42V | phase-cut dim
220-240VAC | precabled 150mm wire
and quick connector to luminaire
50-60Hz
L/W/H 68x33x22
IP20 CE




| | CHF | CODE |
|---|---|---|
| | 45,55 | 90226202 |

## DRIVER 180mA 7.2W DALI

7.2W | 180mA | 10-40V | DALI-2 | push
dim | 220-240VAC | precabled 150mm
wire and quick connector to luminaire
50-60Hz
L/W/H 166x29x21
IP20 CE




| | CHF | CODE |
|---|---|---|
| | 89,05 | 90246301 |

## DRIVER 200mA 10W DIM

10W | 200mA | 30-42V | phase-cut dim
220-240VAC
50-60Hz | 10-100%
L/W/H 85x22x41
IP20 CE




| | CHF | CODE |
|---|---|---|
| | 45,55 | 90226402 |

## DRIVER 200mA 8W DALI

8W | 200mA | 10-40V | DALI-2 | push
dim | 220-240VAC | precabled 150mm
wire and quick connector to luminaire
50-60Hz | 1-100%
L/W/H 166x29x21

IP20 CE




| | CHF | CODE |
|---|---|---|
| | 89,05 | 90246302 |

## DRIVER 250mA 5W DIM

5W | 250mA |10-20V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | wire through
50-60Hz
L/W/H 96x45x26
IP20 CE




| | CHF | CODE |
|---|---|---|
| | 45,55 | 90226403W |

## DRIVER 250mA 5W DIM

5W | 250mA |12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 50-60Hz
L/W/H 68x33x22
IP20 CE




| | CHF | CODE |
|---|---|---|
| | 45,55 | 90226201 |

## DRIVER 250mA 5W DIM

5W | 250mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 3 pole wire
through box | 50-60Hz
L/W/H 68x33x22
IP20 CE




| | CHF | CODE |
|---|---|---|
| 1 pc. | 56,60 | 90226201W |
| 20 pcs. | 905,30 | 90226201WM |

## DRIVER 250mA 10.5W DIM

10.5W | preset at 250mA | 26-42V
phase-cut dim | 220-240VAC
50-60Hz | 10-100%
L/W/H 122x41x23
IP20 CE




| | CHF | CODE |
|---|---|---|
| | 45,55 | 90226501 |

## DRIVER 250mA 10W DALI

10W | 250mA | 10-40V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | 50-60Hz
L/W/H 166x29x21
IP20 CE




| | CHF | CODE |
|---|---|---|
| | 89,05 | 90246403 |

## DRIVER 250mA 10W DALI

10W | 250mA | 10-40V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | wire through
50-60Hz
L/W/H 185x30x21
IP20 CE




| | CHF | CODE |
|---|---|---|
| 1 pc. | 100,05 | 90246403W |
| 20 pcs. | 1600,80 | 90246403WM |

### DRIVER 350mA 3.5W
3.5W | 350mA | 2.7-10V
220-240VAC | 50-60Hz
L/W/H 65x29x18
IP20




| | CHF | CODE |
|---|---|---|
| | 46,95 | 90213102 |

### DRIVER 350mA 6W
6W | 350mA | 8.6-18V
100-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 66x39x22
IP20




| | CHF | CODE |
|---|---|---|
| | 35,20 | 90213303 |

### DRIVER 350mA 6W
6W | 350mA | 8.6-18V
100-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 66x39x22
IP20




| | CHF | CODE |
|---|---|---|
| 1 pc. | 46,25 | 90213303W |
| 20 pcs. | 739,70 | 90213303WM |

### DRIVER 350mA 7.7W
7.7W | 350mA | 3-22V
200-240VAC | 50-60Hz
L/W/H 68x35x21
IP20




| | CHF | CODE |
|---|---|---|
| | 48,30 | 90213202 |

### DRIVER 350mA 7W DIM
7W | 350mA | 10-20V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | wire through
50-60Hz
L/W/H 96x45x26
IP20




| | CHF | CODE |
|---|---|---|
| | 49,00 | 90223407W |

### DRIVER 350mA 7W DIM
7W | 350mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 68x33x22
IP20




| | CHF | CODE |
|---|---|---|
| | 46,25 | 90223301 |

### DRIVER 350mA 7W DIM
7W | 350mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 68x33x22
IP20




| | CHF | CODE |
|---|---|---|
| 1 pc. | 57,30 | 90223301W |
| 20 pcs. | 916,35 | 90223301WM |

### DRIVER 350mA 10W DIM
10W | 350mA | 13-26V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 115x41x25
IP20




| | CHF | CODE |
|---|---|---|
| | 49,00 | 90223406 |

### DRIVER 350mA 10W DIM
10W | 350mA | 13-26V | phase-cut dim
220-240VAC | precabled 150mm wire and quick connector to luminaire
3 pole wire through box | 50-60Hz
L/W/H 115x41x25
IP20




| | CHF | CODE |
|---|---|---|
| 1 pc. | 60,05 | 90223406W |
| 20 pcs. | 960,50 | 90223406WM |

### DRIVER 350mA 10W DIM
10W | 350mA | 14-28V | 1-10V
phase-cut dim | 220-240VAC | 50-60Hz
10-100%
L/W/H 102x51x30
IP20




| | CHF | CODE |
|---|---|---|
| | 42,10 | 90223401 |

### DRIVER 350mA 13W DIM
13W | 350mA | 26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20




| | CHF | CODE |
|---|---|---|
| | 58,65 | 90223404 |

### DRIVER 350mA 14.7W DIM
14.7W | 350mA | 26-42V | phase-cut dim
220-240VAC | 50-60Hz
10-100%
L/W/H 125x41x23
IP20




| | CHF | CODE |
|---|---|---|
| | 51,75 | 90223504 |

### DRIVER 350mA 14W DALI
14W | preset at 350mA | 10-40V
DALI-2 | push dim | 220-240VAC
precabled 150mm wire and quick connector to luminaire | 50-60Hz
1-100%
L/W/H 166x29x21
IP20 68 85 | 78 73 | 88 65




| | CHF | CODE |
|---|---|---|
| | 89,05 | 90243502 |

### DRIVER 350mA 14W DALI
14W | preset at 350mA | 10-40V
DALI-2 | push dim | 220-240VAC
precabled 150mm wire and quick connector to luminaire | wire through
50-60Hz | 1-100%
L/W/H 185x30x21
IP20




| | CHF | CODE |
|---|---|---|
| 1 pc. | 100,05 | 90243502W |
| 20 pcs. | 1600,80 | 90243502WM |

### DRIVER 350mA 4.2W IP66
4.2W | 350mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 38x29x23
IP66




| | CHF | CODE |
|---|---|---|
| | 48,30 | 90213101 |

### DRIVER 350mA 17W IP68
17W | 350mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68




| | CHF | CODE |
|---|---|---|
| | 95,25 | 90213602 |

### DRIVER 350mA 4.5W DIM IP44
4.5W | 350mA | 8-13V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 38x30x20
IP44




| | CHF | CODE |
|---|---|---|
| | 45,55 | 90223101 |

### DRIVER 350/500/700mA 17.5-20W
350/500/700mA output selection
17.5W | 350mA | 25-50V
20W | 500mA | 20-40V
20W | 700mA | 14-28.5V
220-240VAC | 50-60Hz
L/W/H 102x51x30
IP20




| | CHF | CODE |
|---|---|---|
| | 53,85 | 90218601 |

### DRIVER 350/500/700mA 17-32W DIM
350/500/700mA | dipswitch selection
17W | 350mA | 2-47V
24W | 500mA | 2-47V
32W | 700mA | 2-46V
phase-cut dim | not for ambient dim
220-240VAC | 50-60Hz | push dim
L/W/H 166x46x34
IP20




| | CHF | CODE |
|---|---|---|
| | 85,60 | 90228801 |

### DRIVER 500mA 6W
6W | 500mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 68x35x21
IP20




| | CHF | CODE |
|---|---|---|
| | 45,55 | 90214201 |

### DRIVER 500mA 10W
10W | 500mA | 13-20V
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 60x39x20
IP20




| | CHF | CODE |
|---|---|---|
| | 35,20 | 90214406 |

### DRIVER 500mA 10W
10W | 500mA | 13-20V
220-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 60x39x20
IP20




| | CHF | CODE |
|---|---|---|
| 1 pc. | 46,25 | 90214406W |
| 20 pcs. | 739,70 | 90214406WM |

### DRIVER 500mA 6.5W DIM
6.5W | preset at 500mA
7-13V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20




| | CHF | CODE |
|---|---|---|
| | 35,20 | 90224301 |

### DRIVER 500mA 10W DIM
10W | 500mA | 10-20V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | wire through 50-60Hz
L/W/H 96x45x26
IP20




| | CHF | CODE |
|---|---|---|
| | 51,75 | 90224404W |

### DRIVER 500mA 10W DIM
10W | 500mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 115x41x25
IP20




| | CHF | CODE |
|---|---|---|
| | 51,75 | 90224403 |

### DRIVER 500mA 10W DIM
10W | 500mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 115x41x25
IP20




| | CHF | CODE |
|---|---|---|
| 1 pc. | 62,80 | 90224403W |
| 20 pcs. | 1004,65 | 90224403WM |

### DRIVER 500mA 19W DIM
19W | preset at 500mA
26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20




| | CHF | CODE |
|---|---|---|
| | 62,80 | 90224602 |

### DRIVER 500mA 10W 1-10V DIM
10W | 500mA | 10-20V | 1-10V dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 102x51x30
IP20




| | CHF | CODE |
|---|---|---|
| | 49,00 | 90234401 |

### DRIVER 500mA 15W DALI
15W | 500mA |10-31V | DALI-2
push dim | 220-240VAC | precabled with 150mm wire and quick connector to luminaire | wire through
50-60Hz 10-100%
L/W/H 166x29x21
IP20




| | CHF | CODE |
|---|---|---|
| | 89,05 | 90244501 |

### DRIVER 500mA 15W DALI
15W | 500mA |10-31V | DALI-2
push dim | 220-240VAC | precabled with 150mm wire and quick connector to luminaire | wire through
50-60Hz 10-100%
L/W/H 185x30x21
IP20




| | CHF | CODE |
|---|---|---|
| 1 pc. | 100,05 | 90244501W |
| 20 pcs. | 1600,80 | 90244501WM |

### DRIVER 500mA 24W DALI
24W | preset at 500mA | 6-49V
DALI-2 | push dim | 220-240VAC
precabled with quick connector to luminaire | 50-60Hz | 1-100%
L/W/H 143x43x30
IP20




| | CHF | CODE |
|---|---|---|
| | 92,50 | 90244701 |

### DRIVER 500mA 7W IP67
7W | 500mA | 5-14.5V
100-240VAC | 47-63Hz
L/W/H 57x41x24
IP67




| | CHF | CODE |
|---|---|---|
| | 64,20 | 90214301 |

### DRIVER 500mA 24W IP68
24W | 500mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68




| | CHF | CODE |
|---|---|---|
| | 102,15 | 90214702 |

### DRIVER 700mA 6W
6W | 700mA | 3-8.4V
230-240VAC | 50-60Hz
L/W/H 68x35x21
IP20




| CHF | CODE |
|---|---|
| 47,65 | 90215203 |

### DRIVER 700mA 10W DIM
10W | preset at 700mA
8-14V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20




| CHF | CODE |
|---|---|
| 51,75 | 90225402 |

### DRIVER 700mA 14W DIM
14W | preset at 700mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20




| CHF | CODE |
|---|---|
| 53,85 | 90225502 |

### DRIVER 700mA 20W DIM
20W | preset at 700mA
15-28V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20




| CHF | CODE |
|---|---|
| 62,80 | 90225604 |

### DRIVER 700mA 25W DIM
25W | 700mA | 17-35V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 145x51x30
IP20




| CHF | CODE |
|---|---|
| 65,55 | 90225701 |

### DRIVER 700mA 30W DIM
30W | preset at 700mA
26-42V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20




| CHF | CODE |
|---|---|
| 65,55 | 90225702 |

### DRIVER 700mA 28W DALI
28W | preset at 700mA | 6-40V
DALI-2 | push dim | 220-240VAC
precabled with quick connector to luminaire | 50-60Hz | 1-100%
L/W/H 97x43x30
IP20




| CHF | CODE |
|---|---|
| 92,50 | 90245704 |

### DRIVER 700mA 7W IP67
7W | 700mA | 3-10.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.07kg




| CHF | CODE |
|---|---|
| 50,40 | 90215301 |

### DRIVER 24V/15W
15W | 24V
220-240VAC | 50-60Hz
L/W/H 107x33x22
IP20




| CHF | CODE |
|---|---|
| 53,85 | 90212501 |

### DRIVER 24V/25W
2.4-25W | 24V | phase-cut dim | trailing edge only | 220-240VAC | 50-60Hz
L/W/H 128x52x30
IP20




| CHF | CODE |
|---|---|
| 63,50 | 90222701 |

### DRIVER 24V/35W
35W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 142x43x30
IP20




| CHF | CODE |
|---|---|
| 58,00 | 90212801 |

### DRIVER 24V/50W
12-50W | 24V | phase-cut dim | trailing edge only | 220-240VAC | 50-60Hz
L/W/H 166x52x32
IP20




| CHF | CODE |
|---|---|
| 93,85 | 90222901 |

### DRIVER 24V/100W
100W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20




| CHF | CODE |
|---|---|
| 101,85 | 90212902 |

### DRIVER 24V/100W DALI
100W | 24V | DALI
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20




| CHF | CODE |
|---|---|
| 213,90 | 90242901 |

### DRIVER 24V/35W IP67
35W | 24V
100-277VAC | 50-60Hz
L/W/H 199x42x43
IP67




| CHF | CODE |
|---|---|
| 67,65 | 90212802 |

### DRIVER 24V/100W IP67
100W | 24V
100-277VAC | 50-60Hz
L/W/H 178x68x39
IP67




| CHF | CODE |
|---|---|
| 199,55 | 90212903 |

**DRIVER-CONFIGURATOR**
weverducre.com/driver-configurator



## WIRE THROUGH CONNECTOR BOX

3 pole
L/W/H 105x58x30
IP20 min.66




| CHF | CODE |
|---|---|
| 20,70 | 90059145 |

## WIRE THROUGH CONNECTOR BOX

3 pole + DALI
L/W/H 105x58x30
IP20 min.66




| CHF | CODE |
|---|---|
| 24,15 | 90059146 |

## WIRE THROUGH CONNECTOR BOX

3 pole IP68 | quick IP connection box with Gel included
L/W/H 90x43x20
IP68 min.48

| CHF | CODE |
|---|---|
| 49,70 | 90059149 |

## PAR16 FLAT HEAD

PAR16 | GU10
220-240VAC | 50-60Hz
IP20




| CHF | CODE |
|---|---|
| 11,05 | 90059125 |

## CONNECTION BOX 3P PAR16

incl. strain relief | 3 pole push connector | incl. PAR16 socket incl. through-wiring
L/W/H 75x35x25




| CHF | CODE |
|---|---|
| 16,60 | 90059126 |

## DALI TO PHASE-CUT DIMMING MODULE

for converting a DALI signal to phase-cut dim | for max. 20 devices
LED | 10-300W | 230V
L/W/H 120x30x22
IP20

| CHF | CODE |
|---|---|
| 309,15 | 90270901 |

## DIMMER DIN RAIL

max. 200W LED | 230V
phase-cut dim
L/W/H 17x55x90
IP30




| CHF | CODE |
|---|---|
| 218,05 | 90019018 |

## DIMMER FOR SWITCH

max. 200W LED | 230V
phase-cut dim
L/W/H 48x18x46
IP30




| CHF | CODE |
|---|---|
| 171,15 | 90019017 |

## LED MODULE HO

12W | 350mA | 35Vf
1800-3000K | CRI >90 | 1050lm
compatibility on request
IP20 CE M-26°




| | CHF | CODE |
|---|---|---|
| | 104,90 | 905251W9 |
| | 104,90 | 905251B9 |

## LED MODULE HO 2700K

12W | 350mA | 35Vf
2700K | CRI >90 | 1340lm
compatibility on request
IP20 CE M-26°




| | CHF | CODE |
|---|---|---|
| | 104,90 | 905251W3 |
| | 104,90 | 905251B3 |

## LED MODULE HO 3000K

12W | 350mA | 35Vf
3000K | CRI >90 | 1410lm
compatibility on request
IP20 CE M-26°




| | CHF | CODE |
|---|---|---|
| | 104,90 | 905251W5 |
| | 104,90 | 905251B5 |

## LED MODULE HO 4000K

12W | 350mA | 35Vf
4000K | CRI >90 | 1420lm
compatibility on request
IP20 CE M-26°




| | CHF | CODE |
|---|---|---|
| | 104,90 | 905251W7 |
| | 104,90 | 905251B7 |

## LED MODULE CABLE

extension cable between LED module and driver




| | CHF | CODE |
|---|---|---|
| 1m | 7,60 | 90019200 |
| 2m | 9,00 | 90019201 |
| 3m | 10,35 | 90019202 |

## PAR11 LED 2700K

4.3W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
2700K | CRI >90 | 240lm
IP20 CE W-50°




| | CHF | CODE |
|---|---|---|
| | 20,05 | 901128W3 |
| | 20,05 | 901128B3 |

## PAR11 LED 3000K

4.3W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
3000K | CRI >90 | 255lm
IP20 CE W-50°




| | CHF | CODE |
|---|---|---|
| | 20,05 | 901128W5 |
| | 20,05 | 901128B5 |

## PAR16 LED 2700K

6.1W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
2700K | CRI >90 | 445lm
IP20 CE M-35°




| | CHF | CODE |
|---|---|---|
| | 22,80 | 901228W3 |
| | 22,80 | 901228B3 |

## PAR16 LED 3000K

6.1W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
3000K | CRI >90 | 465lm
IP20 CE M-35°




| | CHF | CODE |
|---|---|---|
| | 22,80 | 901228W5 |
| | 22,80 | 901228B5 |

## PAR16 LED HE 2700K

5W | GU10 | 106 lm/W | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 530lm
IP20 CE M-35°




| | CHF | CODE |
|---|---|---|
| | 26,95 | 907228W3 |
| | 26,95 | 907228B3 |

## PAR16 LED HE 3000K

5W | GU10 | 107 lm/W | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 535lm
IP20 CE M-35°




| | CHF | CODE |
|---|---|---|
| | 26,95 | 907228W5 |
| | 26,95 | 907228B5 |

## PAR16 LED 2700K

3.7W | GU10
220-240VAC | 50-60Hz
2700K | CRI >80 | 350lm
IP20 CE M-36°




| | CHF | CODE |
|---|---|---|
| | 17,95 | 905227S2 |

## PAR16 LED 3000K

3.7W | GU10
220-240VAC | 50-60Hz
3000K | CRI >80 | 350lm
IP20 CE M-36°




| | CHF | CODE |
|---|---|---|
| | 17,95 | 905227S4 |

## METAL SPRING CLIP

alternative front lamp fixation spring
for ø 50 lamp rings
LED | PAR16 | max. 12W
**DEEP ADJUST** | **DEEP** 2.0
**PLANO** | **STRANGE** ceiling
**SOLID**




| | CHF | CODE |
|---|---|---|
| | 2,80 | 90019700 |

## SPRING CLIP

lamp fixation | push-in system
for ø 50 lamp rings
LED | PAR16 | max. 12W
**DEEP ADJUST** | **DEEP** 2.0
**PLANO** | **STRANGE** ceiling
**SOLID**

| | CHF | CODE |
|---|---|---|
| | 2,80 | 900198W0 |
| | 2,80 | 900198S0 |
| | 2,80 | 900198G0 |
| | 2,80 | 900198M0 |
| | 2,80 | 900198Q0 |
| | 2,80 | 900198B0 |

### QT14 LED 3000K
3W | G9
220-240VAC | 50-60Hz
3000K | CRI >80 | 300lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| clear | 20,05 | 9019G703 |

### QT14 LED 2700K
3.5W | G9
220-240VAC | 50-60Hz
2700K | CRI >90 | 340lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| opal | 24,85 | 9010G803 |

### QT14 LED 3000K
3.5W | G9 | phase-cut dim
220-240VAC | 50-60Hz
3000K | CRI >90 | 350lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| opal | 24,85 | 9010G805 |

### C35 LED 2700K
5.5W | E14 | phase-cut dim | 20-100%
220-240VAC | 50-60Hz
2700K | CRI >90 | 450lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| opal | 14,50 | 9003C103 |

### ST64 LED 2200K DIM
5.9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 435lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 48,30 | 9003E110 |

### T25-85 LED 2200K
5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 460lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 40,05 | 9003C108 |

### T25-85 LED 2500K
5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2500K | CRI >90 | 480lm
IP20 0.02kg CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 40,05 | 9003C107 |

### T25-85 LED 2700K
5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 500lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 40,05 | 9003C106 |

### T30-225 LED 2200K
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 380lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 53,85 | 9003E129 |

### T30-225 LED 2700K
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 425lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 53,85 | 9003E136 |

### T30-300 LED 2200K
7.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 585lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 59,35 | 9003E130 |

### T30-300 LED 2700K
7.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 610lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 59,35 | 9003E135 |

### A60 LED 2700K DIM
5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 480lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| clear | 42,80 | 9003E138 |

### A60 LED 2700K
9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 800lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| opal | 20,05 | 9003E152 |

### A65 LED 2700K
14.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1375lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| opal | 30,40 | 9003E153 |

### A60 LED 2200K
3.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 245lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 42,80 | 9003E109 |

### A60 LED 2700K
5.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 405lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold mirror | 44,20 | 9003E139 |
| silver mirror | 44,20 | 9003E140 |

### G95 LED 2700K
4.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 375lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| clear | 45,55 | 9003E160 |

### G95 LED 2700K
11.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1100lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| opal | 40,05 | 9003E154 |

### G95 LED 2700K
10W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1060lm
ceramic soft look
IP20 CE




| | CHF | CODE |
|---|---|---|
| opal | 45,55 | 9003E163 |

### G95 LED 2200K
5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 380lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 45,55 | 9003E111 |

### G95 LED 2200K
5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 370lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold mirror | 48,30 | 9003E156 |

### G95 LED 2700K
5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 395/410lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold mirror | 48,30 | 9003E142 |
| silver mirror | 48,30 | 9003E157 |

### G125 LED 2200K
6.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 450lm
IP20 CE




| | CHF | CODE |
|---|---|---|
| gold tinted | 46,95 | 9003E112 |

## REPLACEMENT PLUG
for Switzerland | Liechtenstein




| | CHF | CODE |
|---|---|---|
| | 30,40 | 90019211 |

## REPLACEMENT PLUG
for UK | Ireland | Malta | Arabic peninsila




| | CHF | CODE |
|---|---|---|
| | 30,40 | 90019212 |

## HONEYCOMB LOUVER
**BLIEK PETIT | CENO | LECA PIRRO | QITO**




| | CHF | CODE |
|---|---|---|
| | 20,05 | 915230B0 |

## LIKO 1.0 HONEYCOMB LOUVER




| | CHF | CODE |
|---|---|---|
| | 20,05 | 915231B0 |

## LIKO 2.0 HONEYCOMB LOUVER




| | CHF | CODE |
|---|---|---|
| | 22,10 | 915232B0 |

## LIKO 3.0 HONEYCOMB LOUVER




| | CHF | CODE |
|---|---|---|
| | 24,15 | 915233B0 |

## ODREY
inner cover for 1.6




| | CHF | CODE |
|---|---|---|
| | 40,05 | 911420W0 |
| | 40,05 | 911420G0 |
| | 40,05 | 911420B0 |

## MATCH TRIMLESS DRILLING TOOL
for easy plaster finish




| | CHF | CODE |
|---|---|---|
| | 53,85 | 90019300 |

## FINLIN COVER PLATE ADAPTER
for concrete housings




| | CHF | CODE |
|---|---|---|
| | 17,25 | 900194B0 |

## FINLIN
wall/base spacer for overlapping luminaires




| | CHF | CODE |
|---|---|---|
| | 42,80 | 900195B0 |

## FINLIN ROUND
wall/base spacer for overlapping luminaires




| | CHF | CODE |
|---|---|---|
| | 42,80 | 900196B0 |

## BOX | RAY
flaps for adjustable beam angle white | for BOX/RAY QT14 only




| | CHF | CODE |
|---|---|---|
| | 53,85 | 900401W0 |

## X-BEAM
snoot




| | CHF | CODE |
|---|---|---|
| | 48,30 | 90019023 |

## X-BEAM
snoot round




| | CHF | CODE |
|---|---|---|
| | 48,30 | 90019031 |

## DEEP ADJUST PETIT TRIMLESS | BLIEK PETIT TRIMLESS | QITO TRIMLESS

aluminium plasterkit

Ⓓ 78-80 ⎍ 80 ⟡ 12.5, 15, 20, 25




| | CHF | CODE |
|---|---|---|
| | 30,40 | 90017210 |

## DEEP ADJUST TRIMLESS

aluminium plasterkit

Ⓓ 105-110 ⟡ 12.5, 15, 20, 25




| | CHF | CODE |
|---|---|---|
| | 35,90 | 90017209 |

## STRANGE PETIT TRIMLESS 1.0

aluminium plasterkit

Ⓤ 64x64 ⟡ 7-32




| | CHF | CODE |
|---|---|---|
| | 51,10 | 90017202 |

## STRANGE PETIT TRIMLESS 2.0

aluminium plasterkit

Ⓤ 64x117 ⟡ 7-32




| | CHF | CODE |
|---|---|---|
| | 53,85 | 90017205 |

## STRANGE PETIT TRIMLESS 3.0

aluminium plasterkit

Ⓤ 64x169 ⟡ 7-32




| | CHF | CODE |
|---|---|---|
| | 59,35 | 90017208 |

## STRANGE TRIMLESS 1.0 SNEAK TRIMLESS 1.0

aluminium plasterkit

Ⓤ 86x86 ⟡ 7-32




| | CHF | CODE |
|---|---|---|
| | 56,60 | 90017120 |

## STRANGE TRIMLESS 2.0 SNEAK TRIMLESS 2.0

aluminium plasterkit

Ⓤ 156x86 ⟡ 7-32




| | CHF | CODE |
|---|---|---|
| | 62,10 | 90017121 |

## LITO

plasterkit




| | CHF | CODE |
|---|---|---|
| | 22,80 | 90017119 |

### PLANO 1.0
plasterkit




| CHF | CODE |
|---|---|
| 26,25 | 90017104 |

### PLANO 2.0
plasterkit




| CHF | CODE |
|---|---|
| 36,60 | 90017105 |

### STRIPE 0.4 | 0.7
recessed housing incl. plasterkit
75x75 ⎍65




| CHF | CODE |
|---|---|
| 33,15 | 90012037 |

### STRIPE 2.2
recessed housing incl. plasterkit
251x76 ⎍65




| CHF | CODE |
|---|---|
| 59,35 | 90012038 |

### ORIS 0.7 | RETO 2.0
recessed housing incl. plasterkit
191x58 ⎍75




| CHF | CODE |
|---|---|
| 62,10 | 90012039 |

### ORIS 0.8 | RETO 0.8
recessed housing incl. plasterkit
70x70 ⎍80




| CHF | CODE |
|---|---|
| 63,50 | 90012047 |

### ORIS 1.3 | RETO 1.3
recessed housing incl. plasterkit
122x122 ⎍75




| CHF | CODE |
|---|---|
| 71,80 | 90012041 |

### ORIS 2.0
recessed housing incl. plasterkit
123x191 ⎍75




| CHF | CODE |
|---|---|
| 80,05 | 90012043 |



### LITO
always use in combination with plasterkit
122x90 ⎍45




| CHF | CODE |
|---|---|
| 36,60 | 90012027 |

### ORIS 0.7 | RETO 2.0
concrete housing
192x58 ⎍60




| CHF | CODE |
|---|---|
| 52,45 | 90012044 |

### ORIS 0.8 | RETO 0.8
concrete housing
70x70 ⎍65




| CHF | CODE |
|---|---|
| 44,20 | 90012046 |

### ORIS 1.3 | RETO 1.3
concrete housing
122x122 ⎍60




| CHF | CODE |
|---|---|
| 53,85 | 90012040 |

### ORIS 2.0
concrete housing
123x191 ⎍60




| CHF | CODE |
|---|---|
| 58,00 | 90012042 |

### MAP 0.6 | CHART 0.6 BLINK | TRIMLESS
ground housing
137 ⎍110




| CHF | CODE |
|---|---|
| 34,50 | 90012201 |

### MAP 0.9 | CHART 0.9
ground housing
137 ⎍130




| CHF | CODE |
|---|---|
| 46,95 | 90012202 |

### MAP 1.2 | CHART 1.2 MAP ASYM 1.2 | CHART ASYM 1.2
ground housing
190 ⎍158




| CHF | CODE |
|---|---|
| 64,90 | 90012203 |

### MAP 1.6 | CHART 1.6 MAP ASYM 1.6 | CHART ASYM 1.6
ground housing
220 ⎍184




| CHF | CODE |
|---|---|
| 84,20 | 90012204 |

## FLYRA SINGLE/MULTI BASE

max. 25W | const. volt. | 24V
phase-cut dim | W/H ø62x102
polycarbonate




| | CHF | CODE |
|---|---|---|
| | 75,90 | 914224M0 |
| | 75,90 | 914224B0 |

## FLYRA MULTI BASE

max. 50W | const. volt. | 24V
phase-cut dim | W/H ø200x38
polycarbonate




| | CHF | CODE |
|---|---|---|
| | 103,50 | 914225M0 |
| | 103,50 | 914225B0 |

## FLYRA CABLE CONNECTOR

cable from one luminaire to another
incl. plugs




| | CHF | CODE |
|---|---|---|
| 0.3m | 20,05 | 915210B0 |
| 0.6m | 26,25 | 915211B0 |
| 0.9m | 31,75 | 915212B0 |
| 1.2m | 37,30 | 915213B0 |

## FLYRA FIX CONNECTOR

electrical | mechanical | straight
central suspension




| | CHF | CODE |
|---|---|---|
| | 33,15 | 915221B0 |

## ILANE BLACK DIFFUSER

only for 1.0




| | CHF | CODE |
|---|---|---|
| 2m | 19,35 | 911902B1 |
| 3m | 29,00 | 911903B1 |

## ILANE BLACK DIFFUSER

only for 3.0




| | CHF | CODE |
|---|---|---|
| 2m | 23,50 | 911912B1 |
| 3m | 31,75 | 911913B1 |

## ILANE MINI CONNECTOR

strip to strip - continuous




| | CHF | CODE |
|---|---|---|
| IP20 | 3,60 | 90014272 |

## ILANE MINI CONNECTOR

strip to wire




| | CHF | CODE |
|---|---|---|
| IP20 | 2,50 | 90014268 |

## ILANE MINI CONNECTOR

strip to strip




| | CHF | CODE |
|---|---|---|
| IP20 | 4,60 | 90014269 |



## STREX DRIVER 48V/100W

100W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20




| | CHF | CODE |
|---|---|---|
| | 122,85 | 90218901 |

## STREX DRIVER 48V/150W

150W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20




| | CHF | CODE |
|---|---|---|
| | 149,05 | 90218902 |

## STREX DRIVER 48V/250W

250W | 48V
220-240VAC | 50-60Hz
L/W/H 400x40x22
IP20




| | CHF | CODE |
|---|---|---|
| | 186,30 | 90218903 |

## STREX DALI SELV DEVICE

for 48V system | max. 300W | 48VDC
L/W/H 212x37x26




| | CHF | CODE |
|---|---|---|
| | 218,05 | 90019193 |

## RECESSED

track | custom cuts | 48V | 15A | DALI




| | | CHF | CODE |
|---|---|---|---|
| | < 1m | 178,05 | 904111W0CC |
| | < 1m | 178,05 | 904111B0CC |
| | < 2m | 343,65 | 904112W0CC |
| | < 2m | 343,65 | 904112B0CC |
| | < 3m | 500,95 | 904113W0CC |
| | < 3m | 500,95 | 904113B0CC |

CC = for lengths specifications please add four digits in mm

## SURFACE

track | custom cuts | 48V | 15A | DALI




| | | CHF | CODE |
|---|---|---|---|
| | < 1m | 142,15 | 904211W0CC |
| | < 1m | 142,15 | 904211B0CC |
| | < 2m | 259,45 | 904212W0CC |
| | < 2m | 306,40 | 904212L0CC |
| | < 2m | 306,40 | 904212M0CC |
| | < 2m | 306,40 | 904212Q0CC |
| | < 2m | 259,45 | 904212B0CC |
| | < 3m | 375,40 | 904213W0CC |
| | < 3m | 445,75 | 904213L0CC |
| | < 3m | 445,75 | 904213M0CC |
| | < 3m | 445,75 | 904213Q0CC |
| | < 3m | 375,40 | 904213B0CC |

CC = for lengths specifications please add four digits in mm

## SUSPENDED

track | custom cuts | 48V | 15A | DALI




| | | CHF | CODE |
|---|---|---|---|
| | < 1m | 142,15 | 904211W0CC |
| | < 1m | 142,15 | 904211B0CC |
| | < 2m | 259,45 | 904212W0CC |
| | < 2m | 306,40 | 904212L0CC |
| | < 2m | 306,40 | 904212M0CC |
| | < 2m | 306,40 | 904212Q0CC |
| | < 2m | 259,45 | 904212B0CC |
| | < 3m | 375,40 | 904213W0CC |
| | < 3m | 445,75 | 904213L0CC |
| | < 3m | 445,75 | 904213M0CC |
| | < 3m | 445,75 | 904213Q0CC |
| | < 3m | 375,40 | 904213B0CC |

CC = for lengths specifications please add four digits in mm

## SUSP. INDIRECT LIGHT

track | custom cuts | 48V | 15A | DALI
3000K | CRI >90 | 14W/m | 950lm/m
with indirect light




| | | CHF | CODE |
|---|---|---|---|
| | < 2m | 821,10 | 904512W5CC |
| | < 2m | 821,10 | 904512B5CC |
| | < 3m | 959,10 | 904513W5CC |
| | < 3m | 959,10 | 904513B5CC |

CC = for lengths specifications please add four digits in mm

### TRACK ADAPTER 1.0 HV

no space for driver | cable diameter max. 10mm | for suspended luminaires without steel wire incl. strain relief max. weight 10kg




| | CHF | CODE |
|---|---|---|
| | 20,70 | 90014044 |
| ■ | 20,70 | 90014043 |

### TRACK ADAPTER 2.0 HV

no space for driver | cable diameter max. 5mm | for suspended luminaires without steel wire incl. strain relief max. weight 3kg




| | CHF | CODE |
|---|---|---|
| | 22,10 | 90014277 |
| ■ | 22,10 | 90014278 |

### ADJUSTABLE CORNER




| | CHF | CODE |
|---|---|---|
| | 52,45 | 90014042 |
| ■ | 52,45 | 90014041 |

### COVERPLATE I/L/T/X

only use with recessed tracks




| | CHF | CODE |
|---|---|---|
| | 11,05 | 90014126 |
| ■ | 11,05 | 90014127 |

### COVERPLATE END FEEDS

only use with recessed tracks




| | CHF | CODE |
|---|---|---|
| | 13,15 | 90014124 |
| ■ | 13,15 | 90014125 |

### X-FEED




| | CHF | CODE |
|---|---|---|
| | 67,65 | 90014049 |
| ■ | 67,65 | 90014050 |

### T-FEED 1.0

top view




| | CHF | CODE |
|---|---|---|
| | 60,75 | 90014010 |
| ■ | 60,75 | 90014011 |

### T-FEED 2.0

top view




| | CHF | CODE |
|---|---|---|
| | 60,75 | 90014012 |
| ■ | 60,75 | 90014013 |

### T-FEED 3.0

top view




| | CHF | CODE |
|---|---|---|
| | 60,75 | 90014014 |
| ■ | 60,75 | 90014015 |

### T-FEED 4.0

top view




| | CHF | CODE |
|---|---|---|
| | 60,75 | 90014016 |
| ■ | 60,75 | 90014017 |



### CUTTING TOOL

for cutting the inner copper cables of 3-phase track and 48V track

CE TÜV




| CHF | CODE |
|---|---|
| 154,60 | 90014165 |

### TRACK ADAPTER HV

no space for driver | cable diameter max. 6.6mm | for suspended luminaires without steel wire incl. strain relief max. weight 5kg




| | CHF | CODE |
|---|---|---|
| | 22,10 | 90014279 |
| ■ | 22,10 | 90014280 |

### TRACK ADAPTER LV

DALI-2 | 350mA | incl. driver




| | CHF | CODE |
|---|---|---|
| | 124,20 | 914174W0 |
| ■ | 124,20 | 914174B0 |

### OPLIA TRACK ADAPTER LV

DALI-2 | 250mA | incl. driver




| | CHF | CODE |
|---|---|---|
| | 124,20 | 914172W0 |
| ■ | 124,20 | 914172B0 |

### POWER OUTLET

10A | 220-250V | 50-60Hz
Schuko adapter
PC UL94V0 + copper 50N
L/W/H 85x54x103
IP20 CE

| | CHF | CODE |
|---|---|---|
| | 52,45 | 90014254 |
| ■ | 52,45 | 90014253 |

### HOOK

max. weight 5kg




| | CHF | CODE |
|---|---|---|
| | 12,45 | 90014284 |
| ■ | 12,45 | 90014285 |

### FLEXIBLE CONNECTOR




| | CHF | CODE |
|---|---|---|
| | 102,15 | 90014288 |
| ■ | 102,15 | 90014289 |

### X-FEED




| | CHF | CODE |
|---|---|---|
| | 131,10 | 90014248 |
| ■ | 131,10 | 90014249 |

### T-FEED 1.0

top view




| | CHF | CODE |
|---|---|---|
| | 104,90 | 90014228 |
| ■ | 104,90 | 90014229 |

### T-FEED 2.0

top view




| | CHF | CODE |
|---|---|---|
| | 104,90 | 90014230 |
| ■ | 104,90 | 90014231 |

### T-FEED 3.0

top view




| | CHF | CODE |
|---|---|---|
| | 104,90 | 90014232 |
| ■ | 104,90 | 90014233 |

### T-FEED 4.0

top view




| | CHF | CODE |
|---|---|---|
| | 104,90 | 90014234 |
| ■ | 104,90 | 90014235 |

## STRAIN RELIEF
for suspended luminaire power cable fixation in base




| CHF | CODE |
|---|---|
| 3,90 | 90052064 |

## CABLE WALL/CEILING BRACKET
for cable 4.25-5.5mm diameter




| | CHF | CODE |
|---|---|---|
| | 15,90 | 90019197 |
| | 15,90 | 90019198 |

## SINGLE BASE LV
DALI-2 | 350mA | incl. driver




| CHF | CODE |
|---|---|
| 151,80 | 914117W0 |
| 151,80 | 914117B0 |

## OPLIA SINGLE BASE LV
DALI-2 | 250mA | incl. driver




| CHF | CODE |
|---|---|
| 151,80 | 914116W0 |
| 151,80 | 914116B0 |

## MULTI CHANDELIER LV
3 luminaires | 3x175mA
phase-cut dim | incl. driver
always use with hooks




| CHF | CODE |
|---|---|
| 358,80 | 914161WW0 |
| 414,00 | 914161BL0 |
| 358,80 | 914161BM0 |
| 358,80 | 914161BQ0 |
| 358,80 | 914161BB0 |

## MULTI CHANDELIER LV
6 luminaires | 6x175mA
phase-cut dim | incl. driver
always use with hooks




| CHF | CODE |
|---|---|
| 407,10 | 914162WW0 |
| 462,30 | 914162BL0 |
| 407,10 | 914162BM0 |
| 407,10 | 914162BQ0 |
| 407,10 | 914162BB0 |

## MULTI CHANDELIER LV
9 luminaires | 9x175mA
phase-cut dim | incl. driver
always use with hooks




| CHF | CODE |
|---|---|
| 455,40 | 914163WW0 |
| 510,60 | 914163BL0 |
| 455,40 | 914163BM0 |
| 455,40 | 914163BQ0 |
| 455,40 | 914163BB0 |

## MULTI CHANDELIER HV
1-9 luminaires | always use with hooks




| CHF | CODE |
|---|---|
| 324,30 | 914160WW0 |
| 379,50 | 914160BL0 |
| 324,30 | 914160BM0 |
| 324,30 | 914160BQ0 |
| 324,30 | 914160BB0 |

## HOOK
always use for MULTI CHANDELIER




| CHF | CODE |
|---|---|
| 26,25 | 90052083 |
| 26,25 | 90052084 |

## HOOK
for cable 4.25-5.5mm diameter | for single and multi suspension | also for textile cable




| CHF | CODE |
|---|---|
| 24,85 | 90052079 |
| 24,85 | 90052080 |

## HOOK
standard multi suspension hook for ø5 plugs




| CHF | CODE |
|---|---|
| 6,25 | 90052025 |
| 6,25 | 90052024 |

## HOOK
optional multi suspension hook for ø6 plugs




| CHF | CODE |
|---|---|
| 6,65 | 90052066 |
| 6,65 | 90052065 |



## WIRO
cable wall bracket
only for WIRO textile cable




| CHF | CODE |
|---|---|
| 27,60 | 90052062 |

## WIRO CABLE PLUG & PLAY
E27 LED 4-25W | connector set for one shade | black textile cable | incl. cable plug with dimmer | 2 cable brackets included




| | CHF | CODE |
|---|---|---|
| 8.5m | 231,85 | 90015165 |

## WIRO DECENTER SET 1.0
A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included




| | CHF | CODE |
|---|---|---|
| 2.6m | 149,05 | 90052050 |
| 6m | 162,85 | 90052051 |

## WIRO DECENTER SET 2.0
2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included




| | CHF | CODE |
|---|---|---|
| 2.6m | 273,25 | 90052055 |
| 6m | 314,65 | 90052056 |

## WIRO DECENTER SET 3.0
3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included




| | CHF | CODE |
|---|---|---|
| 2.6m | 394,70 | 90052060 |
| 6m | 463,70 | 90052063 |

## WIRO DECENTER SET 4.0
4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included




| | CHF | CODE |
|---|---|---|
| 2.6m | 507,85 | 90052067 |
| 6m | 576,85 | 90052078 |

## KUJO BASE
replacement for 1.0, 2.0 for central steel wire mounting




| CHF | CODE |
|---|---|
| 338,10 | 914215W0 |
| 338,10 | 914215SG0 |
| 338,10 | 914215M0 |
| 338,10 | 914215Q0 |
| 338,10 | 914215B0 |

## KUJO CONNECTORS
cable from one luminaire to another incl. plugs | only for 2.1, 3.2, 3.2.1




| | CHF | CODE |
|---|---|---|
| 0.3m | 20,05 | 915210W0 |
| 0.3m | 20,05 | 915210SG0 |
| 0.3m | 20,05 | 915210B0 |
| 0.6m | 26,25 | 915211W0 |
| 0.6m | 26,25 | 915211SG0 |
| 0.6m | 26,25 | 915211B0 |

## KUJO CONNECTORS
cable from one luminaire to another incl. plugs | only for 2.1, 3.2, 3.2.1




| | CHF | CODE |
|---|---|---|
| 0.9m | 31,75 | 915212W0 |
| 0.9m | 31,75 | 915212SG0 |
| 0.9m | 31,75 | 915212B0 |
| 1.2m | 37,30 | 915213W0 |
| 1.2m | 37,30 | 915213SG0 |
| 1.2m | 37,30 | 915213B0 |

### KIOSK POLE 400
straight pole | incl. ground spike




| | CHF | CODE |
|---|---|---|
| | 157,35 | 910101A0 |
| | 157,35 | 910101Q0 |

### KIOSK POLE 600
straight pole | incl. ground spike




| | CHF | CODE |
|---|---|---|
| | 172,50 | 910102A0 |
| | 172,50 | 910102Q0 |

### KIOSK POLE 800
straight pole | incl. ground spike




| | CHF | CODE |
|---|---|---|
| | 190,45 | 910103A0 |
| | 190,45 | 910103Q0 |

### SWAM POLE 400
straight pole | incl. ground spike




| | CHF | CODE |
|---|---|---|
| | 142,15 | 910090Q0 |
| | 142,15 | 910090B0 |

### SWAM POLE 600
straight pole | incl. ground spike




| | CHF | CODE |
|---|---|---|
| | 158,70 | 910091Q0 |
| | 158,70 | 910091B0 |

### SWAM POLE 800
straight pole | incl. ground spike




| | CHF | CODE |
|---|---|---|
| | 176,65 | 910092Q0 |
| | 176,65 | 910092B0 |

### SWAM POLE 400
curved pole | incl. ground spike




| | CHF | CODE |
|---|---|---|
| | 196,00 | 910093Q0 |
| | 196,00 | 910093B0 |

### SWAM POLE 600
curved pole | incl. ground spike




| | CHF | CODE |
|---|---|---|
| | 198,75 | 910094Q0 |
| | 198,75 | 910094B0 |

### SWAM POLE 800
curved pole | incl. ground spike




| | CHF | CODE |
|---|---|---|
| | 213,90 | 910095Q0 |
| | 213,90 | 910095B0 |

### KIOSK | SWAM
fixation plate




| | CHF | CODE |
|---|---|---|
| | 30,40 | 90019019 |

### STIPO POLE 200
with fixation plate | 3.0, 4.0




| | CHF | CODE |
|---|---|---|
| | 46,95 | 910062A0 |
| | 46,95 | 910062Q0 |

### STIPO POLE 400
with fixation plate | 3.0, 4.0




| | CHF | CODE |
|---|---|---|
| | 52,45 | 910064A0 |
| | 52,45 | 910064Q0 |

### STIPO POLE 600
with fixation plate | 3.0, 4.0




| | CHF | CODE |
|---|---|---|
| | 56,60 | 910066A0 |
| | 56,60 | 910066Q0 |

### STIPO
ground spike




| CHF | CODE |
|---|---|
| 37,30 | 90013106 |

### X-BEAM
ground spike




| CHF | CODE |
|---|---|
| 40,05 | 90013115 |

### GATE ROUND 1.0 POLE 250
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 80,05 | 910121A0 |
| | 80,05 | 910121Q0 |

### GATE ROUND 1.0 POLE 450
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 95,25 | 910122A0 |
| | 95,25 | 910122Q0 |

### GATE ROUND 1.0 POLE 650
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 121,45 | 910123A0 |
| | 121,45 | 910123Q0 |

### GATE ROUND 2.0 POLE 250
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 80,05 | 910124A0 |
| | 80,05 | 910124Q0 |

### GATE ROUND 2.0 POLE 450
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 95,25 | 910125A0 |
| | 95,25 | 910125Q0 |

### GATE ROUND 2.0 POLE 650
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 121,45 | 910126A0 |
| | 121,45 | 910126Q0 |

### GATE CARRÉ 1.0 POLE 250
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 91,10 | 910111A0 |
| | 91,10 | 910111Q0 |

### GATE CARRÉ 1.0 POLE 450
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 106,30 | 910112A0 |
| | 106,30 | 910112Q0 |

### GATE CARRÉ 1.0 POLE 650
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 132,50 | 910113A0 |
| | 132,50 | 910113Q0 |

### GATE CARRÉ 2.0 POLE 250
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 91,10 | 910114A0 |
| | 91,10 | 910114Q0 |

### GATE CARRÉ 2.0 POLE 450
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 106,30 | 910115A0 |
| | 106,30 | 910115Q0 |

### GATE CARRÉ 2.0 POLE 650
pole with fixation plate




| | CHF | CODE |
|---|---|---|
| | 132,50 | 910116A0 |
| | 132,50 | 910116Q0 |

### POLE 170
with fixation plate
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 135,25 | 910013A0 |
| | 135,25 | 910013Q0 |
| | 135,25 | 910013B0 |

### POLE 170
with concrete ground fixation
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 171,15 | 910073A0 |
| | 171,15 | 910073Q0 |
| | 171,15 | 910073B0 |

### POLE 270
with fixation plate
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 149,05 | 910014A0 |
| | 149,05 | 910014Q0 |
| | 149,05 | 910014B0 |

### POLE 270
with concrete ground fixation
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 187,70 | 910074A0 |
| | 187,70 | 910074Q0 |
| | 187,70 | 910074B0 |

### POLE 470
with fixation plate
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 169,75 | 910016A0 |
| | 169,75 | 910016Q0 |
| | 169,75 | 910016B0 |

### POLE 470
with concrete ground fixation
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 204,25 | 910076A0 |
| | 204,25 | 910076Q0 |
| | 204,25 | 910076B0 |

### POLE 670
with fixation plate
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 187,70 | 910018A0 |
| | 187,70 | 910018Q0 |
| | 187,70 | 910018B0 |

### POLE 670
with concrete ground fixation
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 223,60 | 910078A0 |
| | 223,60 | 910078Q0 |
| | 223,60 | 910078B0 |

### POLE 870
with fixation plate
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 213,90 | 910010A0 |
| | 213,90 | 910010Q0 |
| | 213,90 | 910010B0 |

### POLE 870
with concrete ground fixation
**PALOS ROUND | PALOS CARRÉ**




| | CHF | CODE |
|---|---|---|
| | 259,45 | 910070A0 |
| | 259,45 | 910070Q0 |
| | 259,45 | 910070B0 |

### LINUS POLE 150
with fixation plate




| | CHF | CODE |
|---|---|---|
| | 114,55 | 910024D0 |
| | 114,55 | 910024A0 |
| | 114,55 | 910024Q0 |

### LINUS POLE 350
with fixation plate




| | CHF | CODE |
|---|---|---|
| | 150,45 | 910026D0 |
| | 150,45 | 910026A0 |
| | 150,45 | 910026Q0 |

### LINUS POLE 550
with fixation plate




| | CHF | CODE |
|---|---|---|
| | 191,85 | 910028D0 |
| | 191,85 | 910028A0 |
| | 191,85 | 910028Q0 |

### LINUS
ground spike




| CHF | CODE |
|---|---|
| 85,60 | 90013103 |

### LINUS
concrete ground fixation




| CHF | CODE |
|---|---|
| 85,60 | 90013302 |



### PLUG & PLAY
### DRIVER 24V/30W IP67
30W | 24V
220-240VAC | 50Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
CH and UK variants online
L/W/H 110x48x31
IP67 CE




| CHF | CODE |
|---|---|
| 136,65 | 90018014 |

### PLUG & PLAY
### DRIVER 24V/75W IP67
75W | 24V
220-240VAC | 50Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
CH and UK variants online
L/W/H 129x49x32
IP67 CE




| CHF | CODE |
|---|---|
| 164,25 | 90018015 |

### PLUG & PLAY
### EXTENSION CABLE
2x 24V male plug
IP67 H07RN-F CE




| | CHF | CODE |
|---|---|---|
| 0.5m | 22,10 | 90014505 |
| 1m | 35,90 | 90014506 |
| 2.5m | 52,45 | 90014502 |
| 5m | 80,05 | 90014503 |

### PLUG & PLAY
### STRAIGHT CONNECTOR
2x 24V female connector
IP67 H07RN-F CE




| CHF | CODE |
|---|---|
| 13,15 | 90014504 |

### PLUG & PLAY
### T-CONNECTOR
3x 24V female connector
incl. 2 optional caps
IP67 CE




| CHF | CODE |
|---|---|
| 21,40 | 90014501 |

# icons standards

## NO MORE MISUNDERSTANDINGS

| ICON | ENGLISH | GERMAN | DUTCH | FRENCH | SPANISH | ITALIAN |
|---|---|---|---|---|---|---|
| | Cutout Round | Ausschnitt rund | Ronde inbouwopening | Découpe ronde | Corte circular | Taglio tondo |
| | Cutout Square | Ausschnitt eckig | Rechthoekige inbouwopening | Découpe rectangulaire | Corte rectangular | Taglio quadro |
| | Recessed Depth | Einbautiefe | Inbouwdiepte | Profondeur d'encastrement | Profundidad de empotramiento | Profondità dell'incasso |
| | Ceiling Thickness | Deckenstärke | Plafonddikte | Épaisseur du plafond | Espesar del techo | Spessore del soffitto |
| 0°-X°/X° | Rotatable vertically \| horizontally | Drehbar vertikal \| horizontal | Draaibaar verticaal \| horizontaal | Orientable verticalement \| horizontalement | Orientable en vertical \| horizontal | Orientabile in verticale \| orizzontale |
| | Beam Angle | Abstrahlwinkel | Reflectorhoek | Faiseau | Ángulo de apertura | Fascio luminoso |
| N – M – W | narrow – medium – wide beamangle | engstrahlend - medium-strahlend - breitstrahlend | smal - medium - breed | étroit - moyen - large | estecho - medio - ancho | stretto - medio - largo |
| | Class 1 Fixture | Leuchte der Schutzklasse 1 | Toestel klasse 1 | Appareil classe 1 | Aparato de clase 1 | Lampada classe 1 |
| | Class 2 Fixture | Leuchte der Schutzklasse 2 | Toestel klasse 2 | Appareil classe 2 | Aparato de clase 2 | Lampada classe 2 |
| III | Class 3 Fixture | Leuchte der Schutzklasse 3 | Toestel klasse 3 | Appareil classe 3 | Aparato de clase 3 | Lampada classe 3 |
| IP 20 | IP rating | IP Bewertung | IP-classificatie | Indice de protection | Grado IP | Grado di protezione IP |
| IP 44 | Frontal IP rating | Frontale IP Bewertung | IP-classificatie | Évaluation IP frontale | Grado IP en parte frontal | Grado di protezione IP frontale |
| IK 06 | IK rating | Schlagfestigkeit | IK-classificatie | IK rating | Grado IK | IK rating |
| UGR ≤ 19 | Screen-compatible workplace light | Bildschirmtaugliche Arbeitsplatzleuchte | Werkplekverlichting is compatibel met beeldscherm | Éclairage compatible pour écran d'ordinateur | Iluminación para puestos de trabajo compatible con pantallas | Adatta per ambienti di lavoro \| uffici |
| IC rated | IC rated: may be covered with insulation material | IC Rated: kann mit Isoliermaterial abgedeckt werden | IC classificatie: kan worden bedekt met isolatiemateriaal | Classé IC: peut être recouvert d'un matériau isolant | Clasificación IC: puede cubrirse con material aislante | Protezione IC. Può essere coperto con materiale isolante |
| L80 \| 50K | LED Lifetime: Lumen output is minimum 80% after 50.000 hours | LED-Lebensdauer: Die Lichtausbeute nach 50.000 Stunden beträgt mindestens 80 % | Led-levensduur: de lichtopbrengst na 50.000 branduren is minimaal 80% | Durée de vie des LED : l'efficacité lumineuse au bout de 50 000 heures s'élève à 80 % minimum | Vida útil de los LED: la eficiencia luminosa tras 50.000 horas es de al menos el 80 % | Durata dei LED: l'efficienza luminosa è pari ad almeno l'80% dopo 50.000 ore di funzionamento |

| ICON | ENGLISH | GERMAN | DUTCH | FRENCH | SPANISH | ITALIAN |
|---|---|---|---|---|---|---|
| CE | CE conform | CE-konform | CE-conform | Conformité CE | Conformidad CE | Conformità CE |
| | ENEC Certificate | ENEC Zertifikat | ENEC Certificaat | Certificat ENEC | Certificado ENEC | Certificato ENEC |
| | UL Certificate | UL Zertifikat | UL Certificaat | Certificat UL | Certificado UL | Certificato UL |
| Kelvin | Colour Temperature | Farbtemperatur | Kleurtemperatuur | Température de couleur | Temperatura de color | Temperatura colore |
| Blue lines | Part not included | Teil nicht inkludiert | Onderdeel niet inbegrepen | Pièce non comprise | Parte no incluida | Articolo non incluso |
| | Up/Down | Aufwärts/abwärts strahlen | Licht boven of onder | Éclairage haut ou bas | Emisión superior/ inferior | Luce monoemissione sopra/sotto |
| | Up and Down | Aufwärts und abwärts strahlend | Licht boven en onder | Éclairage haut et bas | Emisión superior e inferior | Luce biemissione sopra/sotto |
| A - G | Energy labelling regulation | Verordnung über die Energiekennzeichnung | Energielabel | Règlement sur l'étiquetage énergétique | Reglamento sobre el etiquetado energético | Regolamento sull' etichettatura energetica |
| | Light source replaceable by end user | Lichtquelle durch Endverbraucher austauschbar | Lichtbron vervangbaar door eindgebruiker | Source lumineuse remplaçable par l'utilisateur final | Fuente luminosa sustituible por el usuario | Sorgente luminosa sostituibile dall'utente finale |
| | Light source not replaceable | Lichtquelle nicht austauschbar | Lichtbron niet vervangbaar | Source lumineuse non remplaçable | Fuente luminosa no sustituible | Sorgente luminosa non sostituibile |
| | Control gear replaceable by end user | Betriebsgerät durch Endverbraucher austauschbar | Driver vervangbaar door eindgebruiker | Dispositif de commande remplaçable par l'utilisateur final | Mecanismo de control sustituible por el usuario | Dispositivo di controllo sostituibile dall'utente finale |
| | Control gear not replaceable | Betriebsgerät nicht austauschbar | Driver niet vervangbaar | Dispositif de commande non remplaçable | Mecanismo de control no sustituible | Dispositivo di controllo non sostituibile |
| | Light source replaceable by authorized professional | Lichtquelle durch autorisierte Fachleute austauschbar | Lichtbron vervangbaar door een erkend vakman | Source lumineuse remplaçable par un professionnel agréé | Fuente luminosa sustituible por un técnico autorizado | Sorgente luminosa sostituibile da tecnici specializzati |
| | Control gear replaceable by authorized professional | Betriebsgerät durch autorisierte Fachleute austauschbar | Driver vervangbaar door een erkend vakman | Dispositif de commande remplaçable par un professionnel agréé | Mecanismo de controls ustituible por un técnico autorizado | Dispositivo di controllo sostituibile da tecnici specializzati |

# contact

## HEAD OFFICE + SHOWROOM


**WEVER & DUCRÉ BV**
Spinnerijstraat 99/21
8500 Kortrijk, Belgium
Phone +32 56 492 800
office@weverducre.com
weverducre.com


## SHOWROOMS


**AUSTRIA**
Dokter-Hermann-Thurner-Straße 3 / Top 17
4060 Leonding
Phone +43 316 3170 8570
office.at@weverducre.com

Gleisdorfer Gasse 15
8010 Graz
Phone +43 316 317 085 91
office.at@weverducre.com

Marxergasse 1B
1030 Vienna
Phone +43 1 526 47 84
office.at@weverducre.com

**BELGIUM**
Gare Maritime
Picardstraat 7
bus 304
1000 Brussels
Phone +32 56 492 800
office@weverducre.com

**FINLAND**
Sörnäistenkatu 1
00580 Helsinki
Phone +358 50 348 4366
office.fi@weverducre.com

**FRANCE**
36, Rue Juliette Récamier
69006 Lyon
Phone +33 4 72811199
office.fr@weverducre.com

10, Rue Pecquay
75004 Paris
Phone +33 1 402 981 01
office.fr@weverducre.com

**GERMANY**
Europa-Allee 18
60327 Frankfurt am Main
Phone +49 69 21029590
office.de@weverducre.com

Helmholtzstraße 2
10587 Berlin
Phone +49 30 39743290
office.de@weverducre.com

Schanzenstraße 36, Geb. 234B
51063 Cologne
Phone +49 221 130649 60
office.de@weverducre.com

Ruhrstraße 11A / Im Phoenixhof
22761 Hamburg
Phone +49 40 85179283 0
office.de@weverducre.com

Maybachstraße 10b
70469 Stuttgart
Phone +49 711 806075 90
office.de@weverducre.com

**HONG KONG**
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point, Hong Kong
Phone +852 211 069 24
office.hk@weverducre.com
office.cn@weverducre.com

**ITALY**
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
Phone +39 0421 177 83 88
office.it@weverducre.com

**NETHERLANDS**
Design Post Amsterdam
Cruquiusweg 111L, 1019 AG Amsterdam
Phone +31 20 229 6001
info.nl@weverducre.com

**POLAND**
ul. Komitetu Obrony Robotników 70,
02-146 Warsaw
Phone +48 730 330 358
office.pl@weverducre.com

**SPAIN**
Plaça Duc de Medinaceli 5
08002 Barcelona
Phone +34 93 5112 189
office.es@weverducre.com

**SWEDEN**
Norrtullsgatan 12N
11327 Stockholm
Phone +46 10 440 71 10
office.se@weverducre.com

**SWITZERLAND**
Sonnmatthof 3
6023 Rothenburg
Phone +41 41 361 60 60
office.ch@weverducre.com

**UK**
477b-478 Batemans Row
London, EC2A 3HH
Phone +44 203 174 01 77
info.uk@weverducre.com


## REPRESENTATIVE OFFICES


**INDIA**
1524, Astralis, Supernova, Sector-94
201301, Noida, Uttar Pradesh
Phone +918377006926
office.in@weverducre.com

**NORWAY**
Drammensveien 130, Inng. B12
0277 Oslo
Phone +47 24 07 61 11
office.no@weverducre.com

**UAE**
Office No. 704, HDS Business Center
Cluster M, Jumeirah Lakes Towers, DMCC
PO Box 336603 Dubai
United Arab Emirates
Phone +971 4 436 23 47
office.me@weverducre.com



©WEVER & DUCRÉ® BV



1ST EDITION, MARCH 2026


All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. Please note: The printed prices reflect the pricing at the time of catalogue publication. For the most up-to-date pricing, please refer to our website. We expressively reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned wattage, lumen, beam angles, lifetime and SDCM values refer to white luminaires (in terms of finishing, covers or housings) in 3000K. Further values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some (original) images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with (V)


| | |
|---|---|
| **COVER** | Frederik Vercruysse |
| **GRAPHIC DESIGN** | Carola Friedrich, Carina Erlach |
| **PRINT PRODUCTION** | Carola Friedrich, René Zavadilik |
| **ILLUSTRATION** | Carina Erlach, Lukas Hochenwarter |
| **TEXT** | Tanja Petschnig |
| **LITHOGRAPHY** | Volker Waldhauser |
| **PROJECT MANAGEMENT** | Carola Friedrich, Melanie Löffler, Victoria Prath |
| **PRINTING** | Drukarnia Perfekt S.A., Warsaw, Poland |
| **VISUALIZATIONS** | Animotions - Visuals for brands, Nanopixel bv, Outlier Creative, P1 Studio |
| **PHOTOGRAPHY** | Adrian Beck (546), Aikon-Producties-bvba (236), Aleksandr Dal Cero (250), Álvaro Valdecantos (724), Amaury Laparra (204, 252), Andrea Badrutt Fotografie (302), Andrei Valeriu Radulescu (242), Anker & Co (36, 234), Annelien Geenen (510), Annelies Degroote (216, 222, 696), Arnold Ory (98), Axis71 (14, 16), Barbara Corsico (554), Bart Gosselin Photography (118, 166, 192, 298, 340, 662), Beeldcollectief l Lucas Despriet (21), Benoit Ravier-Bollard (282), Bert Demasure (420), Bob Reijnders (342), Camille Huguenot (74), Caroline Dethier (812), Catherine Roider (394), Charlotte Kap Interieurfotografie (230), Chiela van Meerwijk (126, 324, 570), Chris Snook (80), Christian Brandstätter (784), Christoph Hütter Photography (30), Christoph Platzer (654), Christoph Steinbauer (368, 578, 748, 754, 816), Corinna Unterkofler (828, 862), Cornelia Kindsvater (442, 443), Daniel Stauch (328), Dieter Vyvey (272), Elia Kuhn Photographe (120), Elien Jansen (224), Elodie Dugué Photographe (598), Elodie Winter Photography (600), Elsa Young (580), Emanuel Waldmann (136), Empower Spaces (656), Erich Sinzinger, 2019 (858), Erik Đuriš (626, 627), Evgenij Avramenko (610), Fabrizio Carraro (418, 419, 658, 659), Federico Covre – Architectural Photographer (407), Flare Department (78, 130), Florian Zenk (36, 446, 447), French Village (584), Gerald Van Rafelghem (842), Gerard Colomé (92, 194, 195, 416, 814, 834, 844), Gianni Declercq Photography (588), Giovanni Nardi (278, 280), Gonzalo Botet (264), Gregor Titze (636), Hanne Joosen Fotografie (164, 244), Hannes Otte (25, 36, 260, 514, 808), Ilaria Sgambaro from Interni 21.11 (392), In-Between Architects Limited (688), Ingo Rasp Photography (574), Jacek Rokowski (674), Jakob Kotzmuth (794, 795), Jan Kan (714), Jean Pellaprat de VISIBLE (524), Joachim De Rous (102), Joachim Grothus (180, 228), Joachim Grubelnik (828, 862), Johan Méallier (594), Julien Pépy (46), Jurrit van der Waal – The Art of Living magazine (606), Karsten Knocke (734), Kim Donggyu (444), Kris Dekeijser (17, 25, 35, 49, 60, 82, 84, 90, 106, 152, 156, 160, 208, 212, 238, 240, 246, 248, 262, 276, 288, 300, 304, 320, 332, 334, 348, 349, 364, 366, 376, 408, 464, 480, 482, 484, 498, 522, 532, 536, 550, 558, 559, 604, 624, 628, 638 632, 634, 702, 718, 730, 742, 756, 758, 764, 768, 780, 786, 800, 802, 810, 826, 838, 848, 850, 860, 861, 864, 872, 880), Kris Dimitriadis/Kurt Dekeyzer studio PSG 2021 (618), Kristof Claeys (172), Kurt Kuball (762, 796), Lennart Wiedermuth (25, 538), Lenzer (380), Local Minded (378), Lukas Jahn (782), Lukas Vazan (18), Lumine Fotografie (518), M. Leimgruber (29), Margriet Hoekstra (254, 820), Marta D'Avenia Photography (608), Marta Vidal (96, 410, 576), Martin Grobe (642), Max Feldhoff (542), Maxi Conesa (202), Melvin wong weije (806), Mgr. art. Matej Hakár (560), Michaël Radi (596, 597), Miikka Leskinen (572, 682), Miloš Martinović (154), Miriam Raneburger (766), Namsun Lee (218), Niels Nygaard (460), Nikolaus Pfusterschmid (752), nomadic..den (494), Norbert Tukaj (740, 840), nunofoto (804), Open Architectes (876), Oracle – Clément Gerard (676), Paloma Pacheco Turnes (664, 665), Patricia Goijens (496), Paul Ott (516, 564, 565), Peter Baas Photography (108, 256), Peter Margis (388), Petri Immonen (220), Philip Kottlorz Fotografie (292, 296, 372, 640), Pilar Shoots (66, 182, 490), PO Photo (146), Pol Viladoms (646), Pro Urban AG (466), Quy Bui - Wuyhoang Studio (478, 653, 890, 891), Radoje Burzan photography (76), renaatnijs (36), Rupert Asanger (540), Salva López (138), Sandra Mulder (14, 19), Sebastian Reiser (468, 469, 684, 886, 888), Sergio Camplone (544), Søren Kristensen (162), Steenoven (186), Stefano Maniero (692), Stella Kager (9, 13, 26, 30, 35, 38, 644), Stéphanie Mathias (51, 354, 355), Stevie Campbell (672), Stijn Poelstra (614), Stijn Vereeken (132), Studio Blenda (424, 425), Studio Erick Saillet (128), Studio Fo.cus (62), Studio Gataric Fotografie (704), Studio05 (652), Sue Baer (488), Supereal (206), Tijs Vervecken (142), Tom Bremer (322, 346, 612), Tom Lierman photography (352), Trien Byttebier (150, 548), Type Type Hype (37), Uliana Grishina (666), Unique Renovations (650), Victor Chito (86, 832), Victor Sajara Photography (856), Vlad Cioplea (556), Yves Garneau (112), Zvonimir Mihaljek (798) |


FSC www.fsc.org MIX Paper from responsible sources FSC® C016890

WITH GROUPED PRODUCT FAMILIES

# index by name


1-PHASE TRACKS 361
3-PHASE TRACKS 385
BENTO 621
BLAS CEILING SURFACE 767
BLAS WALL SURFACE 827
BLIEK 67
BLIEK PETIT CEILING RECESSED 63
BLIEK PETIT CEILING SURFACE 179
BLINK 839

## BOX

BOX CEILING SURFACE 235
BOX CEILING SURFACE EXTERIOR 765
BOX ON STREX 335
BOX WALL SURFACE 607
BOX WALL SURFACE EXTERIOR 815
BOX MINI CEILING SURFACE 231
BOX MINI WALL SURFACE 605

CARD 843

## CENO

CENO CEILING RECESSED 131
CENO CEILING SURFACE 181
CENO ON STREX 321
CENO WALL SURFACE 585

CENTRAL 617
CENTRAL EXTERIOR 809
CG01 719
CG SQUARE 647
CHART 851
CHART ASYM 853
CITY IP44 173
CLASCO 791

## CLEA

CLEA CEILING SURFACE 287
CLEA CEILING SUSPENDED 557
CLEA WALL SURFACE 631

CONE 463
COZY CONE CEILING SUSPENDED 503
COZY CONE ON STREX 345
DARF CEILING SUSPENDED 445
DARF WALL SURFACE 643

## DEEP

DEEP 107
DEEP EXTERIOR 745
DEEP IP65 | IP44 161
DEEP ADJUST 119
DEEP ADJUST IQ 115
DEEP ADJUST PETIT 113
DEEP ADJUST PETIT IQ 111
DEEP ADJUST PETIT TRIMLESS 113
DEEP ADJUST TRIMLESS 117
DEEP BIJOU 99
DEEP BIJOU EXTERIOR 741
DEEP BIJOU IP65 157
DEEP IQ 105
DEEP PETIT 103
DEEP PETIT EXTERIOR 743
DEEP PETIT IP65 159
DEEP PETIT IQ 101
DEEP POINT 97
DEEP POINT IP44 155
DEEPER 109
DEEPER IP44 163

DINOR 563

## DOCUS

DOCUS CEILING SURFACE 241
DOCUS ON STREX 337
DOCUS MINI CEILING SURFACE 239
DOCUS MINI WALL SURFACE 609

DOMINO 693
DOMY ON STREX 327
DOT 649

## DRO

DRO CEILING SURFACE 279
DRO CEILING SUSPENDED 465
DRO FLOOR SURFACE 731
DRO ON 1-PHASE TRACK 373
DRO TABLE 717
DRO TABLE | FLOOR SURFACE 715
DRO WALL SURFACE 623

ELLO SYSTEM 405

## FIL

FIL CEILING SUSPENDED 441
FIL SPIN CEILING SURFACE 267
FIL SPIN WALL SURFACE 681

FINELLE CEILING SUSPENDED 423
FLYRA CEILING SUSPENDED 427
FLYRA SYSTEM 401

## FINLIN

FINLIN CEILING SURFACE 263
FINLIN CEILING SUSPENDED 433
FINLIN FLOOR SURFACE 727
FINLIN WALL SURFACE 673
FINLIN ROUND 679

GATE CARRÉ FLOOR SURFACE 871
GATE ROUND FLOOR SURFACE 869
GEO FLOOR SURFACE 885
GIGANT 461
HAJO IP44 697

## HEXO

HEXO CEILING SURFACE 245
HEXO CEILING SUSPENDED 533
HEXO ON 1-PHASE TRACK 377
HEXO ON 3-PHASE TRACK 393
HEXO ON STREX 339
HEXO MINI CEILING SURFACE 243
HEXO MINI CEILING SUSPENDED HV 531
HEXO MINI CEILING SUSPENDED LV 505
HEXO MINI ON 1-PHASE TRACK 375
HEXO MINI ON 3-PHASE TRACK 391
HEXO MINI WALL SURFACE 611

ILANE 409
INTRA 749

## J.J.W.

J.J.W. CEILING SURFACE 289
J.J.W. CEILING SUSPENDED 479
J.J.W. WALL SURFACE 633

KIOSK FLOOR SURFACE EXTERIOR 857
KIOSK WALL SURFACE 793
KUJO CEILING SUSPENDED 453
LARRA 671

## LECA

LECA CEILING RECESSED 135
LECA CEILING SURFACE 189
LECA ON STREX 325
LECA SNOOZE 569

LEENS 619
LIKO ON 3-PHASE TRACK 387
LINOO CEILING RECESSED 71
LINOO CEILING SURFACE 211
LINUS 881
LITO 575
MAP 845
MAP ASYM 849

## MATCH

MATCH CEILING RECESSED 137
MATCH CEILING SURFACE 193
MATCH CEILING SUSPENDED 509
MATCH ON STREX 329
MATCH SUSPENDED ON STREX 347
MATCH FLOOR SURFACE 729
MATCH TABLE 723
MATCH WALL SURFACE 589
MATCH LUSTA 415
MATCH SNEAK 143
MATCH SNOOZE WALL RECESSED 571
MATCH SNOOZE WALL SURFACE 685
MATCH STICK 145
MATCH POINT 61
MATCH POINT IP44 153

## MICK

MICK CEILING SURFACE 199
MICK ON STREX 333
MICK WALL SURFACE 691
MICK SNOOZE 687

MILES 669
MILES CARRÉ 667
MILES ROUND 663
MIRBA IP44 705

## MIRBI

MIRBI IP44 CEILING RECESSED 171
MIRBI IP44 CEILING SURFACE 297
MIRBI LONG IP44 707

## MIRRO

MIRRO CEILING SURFACE 283
MIRRO CEILING SUSPENDED 467
MIRRO FLOOR SURFACE 733
MIRRO TABLE 721
MIRRO WALL SURFACE 625


**HV** HIGH VOLTAGE | **LV** LOW VOLTAGE

More product families on next page

WITH GROUPED PRODUCT FAMILIES

# index by name


MIRRO SOFT CEILING SURFACE 285
MIRRO SOFT CEILING SUSPENDED 471
MIRRO SOFT WALL SURFACE 629

NET 421

## ODREY



ODREY CEILING SUSPENDED HV 539
ODREY CEILING SUSPENDED LV 517
ODREY ON 1-PHASE TRACK 379
ODREY ON STREX 353
ODREY WALL SURFACE 599

OPLIA CEILING SUSPENDED 521
OPLIA ON STREX 357
OPLIA CHANDELIER 457
ORIS 581
ORIS EXTERIOR 785
PALOS WALL SURFACE EXTERIOR 819
PALOS CARRÉ FLOOR SURFACE EXTERIOR 877
PALOS ROUND FLOOR SURFACE EXTERIOR 873
PAVIO IP65 711
PAVIO EXTERIOR 831

## PERLEZ



PERLEZ IP44 CEILING RECESSED 169
PERLEZ IP44 CEILING SURFACE 295
PERLEZ IP44 WALL SURFACE 701
PERLEZ CLIP IP44 703
PERLEZ GRID 275
PERLEZ SPIN 271

## PIRRO



PIRRO CEILING RECESSED 77
PIRRO CEILING SURFACE 215
PIRRO ON 1-PHASE TRACK 371
PIRRO ON BASE 223
PIRRO OPAL 221
PIRRO PETIT CEILING RECESSED 75
PIRRO PETIT CEILING SURFACE 213

PILLO CEILING SURFACE 201
PILLO ON 1-PHASE TRACK 363
PLANO CEILING RECESSED 85
PLANO IP44 CEILING RECESSED 151
PLANO PETIT CEILING RECESSED 83
PLANO PETIT CEILING SURFACE 227
POLA 889
QUBBY CEILING SUSPENDED 459
QUBBY SYSTEM 397
QITO CEILING RECESSED 57
QITO CEILING SURFACE 177

## RAY



RAY CEILING SURFACE 251
RAY CEILING SURFACE EXTERIOR 759
RAY CEILING SUSPENDED 537
RAY ON 1-PHASE TRACK 377
RAY ON 3-PHASE TRACK 393
RAY ON STREX 341
RAY WALL SURFACE 615
RAY WALL SURFACE EXTERIOR 805
RAY MINI CEILING SURFACE 247
RAY MINI CEILING SUSPENDED HV 535
RAY MINI CEILING SUSPENDED LV 507
RAY MINI ON 1-PHASE TRACK 375
RAY MINI ON 3-PHASE TRACK 391
RAY MINI WALL SURFACE 613

REED 887

## RETO



RETO WALL RECESSED 573
RETO WALL RECESSED EXTERIOR 781
RETO WALL SURFACE EXTERIOR 835
RETO ROUND 833

RIBELLE FLOOR SURFACE 867
RIBELLE IP65 WALL SURFACE 709
RIBELLE WALL SURFACE EXTERIOR 825
RINI SNEAK IP44 167
ROB IP44 301
ROB EXTERIOR 769
ROBY IP44 303
RONY ADJUST 129
RONY ADJUST PETIT 127
RONY PETIT 125
RONY POINT 123

## ROOMOR



ROOMOR CEILING SUSPENDED 495
ROOMOR FLOOR SURFACE 735
ROOMOR TABLE 725
ROOMOR WALL SURFACE 639
ROOMOR OFFICE CEILING SURFACE 293
ROOMOR OFFICE CABLE SUSPENDED 499
ROOMOR OFFICE ON 3-PHASE TRACK 395

ROSS IP54 307
ROSS EXTERIOR 771
RUVI CEILING RECESSED 147
RUVI ON 1-PHASE TRACK 383

## SARA



SARA ON BASE 203
SARA ON 1-PHASE TRACK 365
SARA SNOOZE 689

SCAVA 695
SHEDDA 449
SHEDDA FRACTAL 451
SHIEK 561
SIRRO 229
SNEAK 93
SNEAK TRIMLESS 91
SOLID 257
SOLID BIJOU 253
SOLID PETIT 255
SOLLI CEILING SUSPENDED 523
SOLLI ON STREX 359
SOLLI COCOON 525
SPIRRA SOFT 475
SQUBE ON BASE 205
SQUBE ON 1-PHASE TRACK 369
SQUBE ON 3-PHASE TRACK 389
STIPO 863
STUDO 437
STRANGE TRIMLESS 89
STRANGE PETIT TRIMLESS 87
STREX DOT MODULE 343
STREX OPAL MODULE 343
STREX SYSTEM | 48V 313
STRIPE 579
STRIPE SLIM 577
SWAM FLOOR SURFACE 859
SWAM WALL SURFACE 821

## TAIO



TAIO CEILING RECESSED EXTERIOR 747
TAIO CEILING SURFACE EXTERIOR 757
TAIO IP65 CEILING RECESSED 165
TAIO IP65 CEILING SURFACE 299
TAIO WALL SURFACE EXTERIOR 803

TAPE 817
TAPIS 651
TAPIS SOFT 657
TOWNA IP44 305

## TRADORA



TRADORA CEILING SURFACE 775
TRADORA CEILING SUSPENDED 777
TRADORA WALL SURFACE 823

## TRACE



TRACE CEILING SURFACE 261
TRACE CEILING SUSPENDED HV 547
TRACE CEILING SUSPENDED LV 511
TRACE ON STREX 351
TRACE WALL SURFACE 593
TRACE CHANDELIER 417
TRACE GRID 273
TRACE MINI ON STREX 331
TRACE MINI WALL SURFACE 591
TRACE SLIM 595
TRACE SPIN 269

TRAIN CEILING SURFACE 761
TRAIN WALL SURFACE 807
TRAM CEILING SURFACE 753
TRAM WALL SURFACE 797
TUBE CEILING SURFACE 755
TUBE WALL SURFACE 799
TUBE CARRÉ CEILING SURFACE 763
TUBE CARRÉ WALL SURFACE 811
VENN CEILING SURFACE 277
VENN WALL SURFACE 683
WAVE SOFT 477
WETRO 549
WIRO CEILING SURFACE 291
WIRO CEILING SUSPENDED 489
WIRO CONE 489
WIRO DIAMOND 493
X-BEAM FLOOR PROJECTOR 865
X-BEAM WALL SURFACE 829


**HV** HIGH VOLTAGE | **LV** LOW VOLTAGE

COLOURS AND MATERIALS

For specific information on colours and finishes please refer to weverducre.com/materials

Depending on the product and application, the materialization may differ: For more informations on materials, finishes, structures, RAL and NCS colour codes, please check our product page on the website. RAL and NCS colour codes are always approximate and can be checked by the customer based on samples.

# Outdoor

## METAL

| | |
|---|---|
| W | White |
| D | Grey |
| A | Anthracite Grey |
| Q | Bronze |
| G | Gold |
| B | Black |
| K | Black and Gold |
| CL | Classic Alu |
| CQ | Classic Bronze |
| AB | Antique Brass |
| I | Inox \| 304 Stainless steel electro polished |

## RECYCLED PET FELT

| | |
|---|---|
| WF | White |
| MF | Marble Grey |
| LF | Limestone |
| OF | Oxide Red |
| IF | Indigo Blue |
| AF | Anthracite |
| F | Grey |

## ALUMINIUM COMPOSITE MATERIAL

| | |
|---|---|
| GB | Black and Light Gold |
| NB | Black and Black Chrome |
| LB | Black and Glossy Aluminium |

## MARBLE

| | |
|---|---|
| MB | Black |
| MW | White |

# Indoor

## GLASS HANDBLOWN

| | |
|---|---|
| TS | Smoked Striped |
| TW | Taupe White |
| DW | Dark Taupe White |
| TD | Smoked Diamond |
| YD | Yellow Diamond |
| GD | Green Diamond |
| BD | Blue Diamond |
| FD | Frosted Diamond \| Opal |
| P | Copper Plated |
| B | Smoked |
| W | White \| Opal |

## HAJO GLASS

| | |
|---|---|
| C | Clear |
| W | Sandblasted |
| A | Amber |
| B | Smoked |

## METAL

| | |
|---|---|
| E | White and Black |
| J | White and Gold |
| H | Champagne and Black |
| K | Black and Gold |
| CH | Black and Champagne |
| Z | Black and Copper |
| GW | Cement Grey and White |
| RR | Coral Red and White |

## OTHERS

| | |
|---|---|
| W | White \| LLDPE |

## 3D PRINTED MATERIAL (IQ)

| | |
|---|---|
| RP | Recycled PET |
| W | White ASA |
| B | Black ASA |
| SG | Silk grey ASA |

## METAL

| | |
|---|---|
| LS | Live Simple |
| SG | Silk Grey |
| FJ | Feel Jade |
| CC | Come Closer |
| ME | Mother Earth |
| YE | Yellow CG01 |
| RE | Red CG01 |
| AU | Aubergine CG01 |
| BE | Blue CG01 |
| B | Black CG01 |

## PLASTER

| | |
|---|---|
| GW | Give Warmth |
| ST | Stay Together |
| FJ | Feel Jade |
| RA | Raw material for custom paint |

## METAL

| | |
|---|---|
| W | White |
| L | Aluminium |
| G | Gold |
| M | Champagne |
| Q | Bronze |
| P | Copper |
| V | Corton steel look |
| GM | Gun metal |
| B | Black |
| A | Anodised Aluminium |
| T | Tumbled Aluminium |

## LINE BRUSHED FINISH FOR METAL COLOURS

Line brushed



LAMP CONCEPT

LIGHTING

Avenue du Grand-Champsec 12
CH-1950 Sion

+41 27 565 59 00
Info@lamp-concept.ch
www.lamp-concept.ch